STELPRO

2016-2017 USA CATALOG

STELPRO
360 comfort

COMFORT PRODUCTS

2016-2017 USA CATALOG

RESIDENTIAL, COMMERCIAL AND INDUSTRIAL HEATING

FLOOR HEATING SYSTEMS

THERMOSTATS

BATHROOM FANS

HAND DRYERS

A WORD FROM THE PRESIDENT

In 1981, my father John Chabot founded Chalair Electrik, the company recognized today as °STELPRO. °STELPRO prides itself on its commitment to designing, developing and manufacturing products in Canada. One of the things I credit to °STELPRO's exponential growth over the past generation is our commitment to offering an unparalleled level of service, which has been key in positioning °STELPRO as a leading brand in the market today. No task is neither too big nor too small when it comes to satisfying the needs of our customer, no matter which walk of life that customer comes from. It is not uncommon to see a °STELPRO representative supporting an electrician on a construction site, for example, or assisting an engineer in designing his/her project, or even calling on the residence of an end-user in order to assure 100% customer satisfaction.

Today, °STELPRO employs over 500 people in both its Saint-Bruno-de-Montarville and Grand-Mère manufacturing facilities, both based in Quebec, Canada. °STELPRO's motto is and has always been, "Get it right the first time, every time!" a principle that is an integral part of the °STELPRO culture and one which is embodied every day by our employees. It is just one of the many core values that assure our business partners and their clients the confidence and peace of mind of knowing that they are supporting quality, Canadian-made products, manufactured to the highest of standards.

The relationship that we pride ourselves on sharing with our business partners, employees, suppliers, as well as our community is one based on mutual respect, a spirit of collaboration, a commitment to hard work, the pursuit of excellence, as well as a passion for creativity and innovation. The health and safety of our employees is always the highest priority, as it is these employees who are the driving force behind °STELPRO's success.

Assuring comfort for the end-user is what we strive for; be it from our offer of heating equipment, ventilation products, floor heating systems, or electronic controls, ensuring the combination of optimal performance, safety, innovation and unique design are all contributory to overall comfort and deliver on our promise of the global comfort solution: 360 comfort!

YVES CHABOT
PRESIDENT

HISTORY

°STELPRO

John Chabot, an entrepreneur with remarkable flair, founded Chalair Électrik Inc. in 1981. With the support of his youngest brother, Mike Chabot, the Chabot's attacked the Quebec, Canada market with drive and passion, manufacturing top-performing heating products and backing them with a superior service-level that helped launch their family-owned business forward.

In 1994, Chalair Électrik acquired Stelpro Heating Inc., a competitor based out of Richmond Hill, Ontario, Canada, an acquisition which would overnight secure John Chabot a national footprint across Canada. The acquisition would see John offer a complete line of products and allow him to delve into markets previously unchartered.

> "°STELPRO IS THE STORY OF A FAMILY BUSINESS THAT RAPIDLY BECAME ONE OF QUEBEC, CANADA'S MOST SUCCESSFUL ENTREPRENEURIAL VENTURES."

The year 2000 was a landmark year for Stelpro as not only did it see the second generation of Chabots, brothers Yves and Eric, become shareholders but it also saw the launch of an ambitious relocation project to Saint-Bruno-de-Montarville, on the south shore of Montreal, Quebec, Canada. Nearly one year later, the company inaugurated a 118,000 square foot newly constructed manufacturing facility and celebrated its 20-year anniversary as a local Quebec, Canada success story.

Under the new corporate identity of Stelpro Design Inc., the company invested massively in sophisticated machinery and equipment and installed an in-house automated powder paint shop. The organization grew at lightning speed, rapidly taking market share and becoming recognized as a leader in Canada's electrical heating industry. In 2004, the company diversified its portfolio with the addition of floor heating cables. The company's 25th anniversary in 2006 marked a turning point seeing John Chabot succeed the company to the next generation, Yves and Eric who would proceed to share co-ownership and presidency. That same year, Stelpro invested in the construction of a highly sophisticated research and development laboratory within their facility, the Refrigerator House as it is known by all those who visit – a house built inside of a giant refrigerator – allowing Stelpro to test their products under real-life climatic conditions.

In 2010, Stelpro closed the original Richmond Hill, Ontario facility and relocated all manufacturing activities to the Saint-Bruno-de-Montarville, Quebec, Canada location, which then featured a newly constructed mezzanine, offering a total of 216,000 square footage. Saint-Bruno became what it is known as today, the head office and manufacturing facility for Stelpro, housing numerous advanced technological systems and equipment, including but not limited to,

automated cutting-edge stamping and bending. In addition, the 'Refrigerator House' received CSA C828-6 performance standard recognition and certification. Stelpro became the sole owner of its sister company, Synapse Électronique, positioning itself in the electronic controls sector.

The company's 30th anniversary in 2011 saw Eric Chabot retire from the company, leaving Yves Chabot as sole owner and President of Stelpro Design. Yves' remarkable vision quickly allowed him to take the necessary steps to rally his forces to navigate Stelpro through an increasingly competitive marketplace.

Shortly thereafter, Stelpro redefined their corporate identity to one which would speak more closely to the nature and position of its offer. The °STELPRO 360 Comfort corporate identity was launched shortly thereafter, streamlining its identity and revamping the brand visually. The new °STELPRO logo would properly reflect and communicate a 360 degree global comfort solution speaking to all aspects of the °STELPRO offer.

In 2014, °STELPRO made its grand entrance into the accomplished list of the 50 Best Managed Companies of Canada. Backed by a history of stellar financial performances combined with a business plan focused on growth, quality and continuous improvement, °STELPRO succeeded in standing out in an industry where the challenges are palpable and the global competition as fierce as ever.

CANADA'S BEST MANAGED COMPANIES

°STELPRO IS...

- **PROUDLY CANADIAN**
  A FAMILY-OWNED AND OPERATED BUSINESS SINCE 1981
- **UNPARALLELED CUSTOMER SERVICE AND SALES TEAMS**
  PROFESSIONAL, KNOWLEDGEABLE AND RESPONSIVE
- **PRODUCT SHIPMENT WITHIN 48 HOURS**
  100% FILL-RATE
- **UNRIVALLED QUALITY ASSURANCE**
  VERTICAL INTEGRATION ENSURES OPTIMIZED PRODUCTION PROCESSES
- **THE BEST WARRANTY IN THE INDUSTRY**
  BUY WITH CONFIDENCE!
- **RESEARCH AND DEVELOPMENT**
  REACHING NEW HEIGHTS IN PRODUCT INNOVATION AND IMPROVEMENT
- **MARKETING AND ADVERTISING**
  STRONG BRAND RECOGNITION AND MARKET PRESENCE
- **OFFERING PRODUCT TRAINING SERVICES FOR OUR PARTNERS**
  INDUSTRY-LEADING AND SOPHISTICATED TRAINING FACILITY
- **BRILLIANT AND UNIQUE DESIGNS**
  APPEALS TO NOVICE AND SOPHISTICATED USERS ALIKE
- **THE MOST COMPLETE PRODUCT SELECTION IN THE INDUSTRY**
  CHOOSE FROM OVER 50 DIFFERENT PRODUCT LINES
- **THE PROFESSIONAL'S CHOICE**
  A BRAND YOU CAN RELY ON

TABLE OF CONTENTS

HEATING

B SERIES
ELECTRIC BASEBOARD 12

BA SERIES / BELLA™
HIGH-END BASEBOARD 14

SBB SERIES - COMPACT
MULTIPURPOSE BASEBOARD 16

ASHC SERIES
ELECTRONIC CONVECTOR 18

AMIR SERIES / MIRAGE™
ELECTRONIC CONVECTOR 20

ASOR SERIES / ORLEANS™
HIGH-END CONVECTOR 22

ASIL SERIES / SILHOUETTE™
ELECTRONIC CONVECTOR 24

ASILVC SERIES / SILHOUETTE™
ELECTRONIC BATHROOM
CONVECTOR 26

ARWF SERIES / PULSAIR™
WALL FAN HEATER 28

ASKS SERIES
KICK SPACE HEATER 30

ASK SERIES / AIR CURTAIN™
CEILING FAN HEATER 32

SCR SERIES / RADIANCE™
COVE HEATER 34

CT SERIES
HEATING CABLE 36

SFM SERIES / PERSIA™
HEATING CABLE MAT 38

AWF SERIES
WALL FAN HEATER 42

AWFA SERIES
ALUMINUM WALL FAN HEATER 45

ACBH SERIES
CABINET HEATER 48

ASGH SERIES / SPIDER™
CEILING FAN HEATER 50

ADR SERIES / DRAGON™
CEILING FAN HEATER 52

ACF SERIES
CEILING FAN HEATER 56

ASCH SERIES -MULTIPURPOSE
PORTABLE HEATER 58

ARUH SERIES - COMMERCIAL
& RESIDENTIAL UNIT HEATER 60

ASHU SERIES - COMMERCIAL
& INDUSTRIAL UNIT HEATER 62

ASIRH SERIES / ZENITH™
INFRARED RADIANT HEATER 64

FI SERIES
FLOOR INSERT CONVECTOR 66

AALUX SERIES / ALUX™
ALUMINUM ARCHITECTURAL
BASEBOARDS 68

DBI SERIES
ALUMINUM DRAFT BARRIER 78

OTHER PRODUCTS LIST 80

THERMOSTATS

ELECTRONIC FOR SMART HOME

STZW402 SERIES - STZB402 SERIES / KI™ - 4000 W FOR SMART HOME 84

ELECTRONIC

STE252NP SERIES - 2500 W SINGLE PROGRAMMING 85

STE302NP SERIES - 3000 W **STE402NP SERIES** - 4000 W SINGLE PROGRAMMING 86

STE302P SERIES - 3000 W **STE402P SERIES** - 4000 W MULTIPLE PROGRAMMING 87

STE302R2+ SERIES - DOUBLE POLE, SINGLE PROGRAMMING 90

ELECTRONIC - FLOOR HEATING

STCNP SERIES - 3840 W SINGLE PROGRAMMING 88

STCP SERIES - 3840 W MULTIPLE PROGRAMMING 89

LOW VOLTAGE / 24 V

STE241 SERIES - 24 V, ELECTRONIC, SINGLE PROGRAMMING 91

T822K1018/U SERIES - 24 V 92

T87K1007/U SERIES - 24 V 92

MECHANICAL

SWT SERIES LINE VOLTAGE THERMOSTAT 93

RELAYS 94

ACCESSORIES 96

BATHROOM FANS AND HAND DRYERS

1° SERIES - BFSQ BATHROOM FAN 98

2° SERIES - BFQ BATHROOM FAN 101

3° SERIES - BFN BATHROOM FAN 103

ELN SERIES / EL-NIÑO HAND DRYER 106

LAN SERIES / LA-NIÑA HAND DRYER 109

ASHDLPBH76 SERIES HAIR DRYER 111

ASHDL SERIES HAND DRYER 112

SHDXL SERIES XLERATOR HAND DRYER 113

HVAC PRODUCTS LIST 116

CONTROLS REFERENCE TABLE

ELECTRONIC LINE VOLTAGE THERMOSTATS

MINIMUM WATTAGE: 150/260/300

STE SERIES		WATTAGE			COLOR	AMPERAGE	WEIGHT
NON-PROGRAMMABLE		120 V	208 V	240 V		AMPERES	LB
	STE252NPWB+	1250	2160	2500	WHITE	10.4	1.5
	STE302NPWB+	1500	2600	3000	WHITE	12.5	2
	STE302R2W+**	1500	2600	3000	WHITE	12.5	1.5
	STE402NPWB+	2000	3475	4000	WHITE	16.7	2
	STE402NPSW+	2000	3475	4000	SILICA WHITE	16.7	2
	STE403NPW24*	2000	3475	4000	WHITE	16.7	2
STE SERIES		WATTAGE			COLOR	AMPERAGE	WEIGHT
PROGRAMMABLE		120 V	208 V	240 V		AMPERES	LB
	STE302PWB+	1500	2600	3000	WHITE	12.5	2
	STE402PWB+	2000	3475	4000	WHITE	16.7	2
STZ SERIES		WATTAGE			COLOR	AMPERAGE	WEIGHT
FOR SMART HOME		120 V	240 V	MIN. WATTAGE		AMPERES	LB
	STZW402WB+	2000	4000	150/300	WHITE	16.7	2
	STZB402WB+	2000	4000	150/300	WHITE	16.7	2

LOW VOLTAGE: 24 VOLT - 0.5 AMP

STE SERIES			WEIGHT
NON-PROGRAMMABLE			LB
	STE241WB+	24 VAC .5 AMP 3 WIRE CONNECTION; WHITE	1.5

BI-METAL

SWT SERIES			WEIGHT
			LB
	SWT1F	SPST 22 AMP @ 120-277 VOLT (50-90 FAHRENHEIT) (ADD W FOR WHITE)	1.5
	SWT2F	DPST 22 AMP @ 120-277 VOLT (50-90 FAHRENHEIT) (ADD W FOR WHITE)	1.5

* STE403NPW24 will also operate at 277 V 350 W minimum/4600 W maximum 16.7 amp
** STE302R2W is double pole model with off position, 4-wire connection vs. 2-wire

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

COMPATIBILITY OF **THERMOSTATS AND RELAYS**

SUGGESTED THERMOSTATS AND RELAYS								
MODEL	STZW402† STZB402	STE252NP	STE302NP STE402NP	STE302P STE402P	STE403NP	STE302R2+	STE241 W/ RELAYS RE OR R841D1036	SWT1F SWT2F
PAGE	84	85	86	87	86	90	91-93	94-95
B	X	X	X	X	X	X	X	X
SBB	X	X	X	X	X	X	X	X
BA	X	X	X	X	X	X	X	X
ASHC	X	X	X	X	X		X	
AMIR	X	X	X	X	X		X	
ASOR	X	X	X	X	X		X	
ASIL	X	X	X	X	X		X	
ARWF	X	X	X	X	X	X	X	X
ASKS	X	X	X	X	X	X	X	X
ASK	X	X	X	X	X	X	X	X
ASGH				X	X		X	X
ADR*	X	X	X	X	X		X	X
SCR	X	X	X	X	X	X	X	X
ACBH*	X	X	X	X	X	X	X	X
AWF*	X	X	X	X	X	X	X	X
AWFA*	X	X	X	X	X	X	X	X
ACF*	X	X	X	X	X	X	X	X
ARUH*	X	X	X	X	X	X	X	X
ASHU*	X	X	X	X		X	X	X
FI	X	X	X	X	X	X	X	X
AALUX*	X	X	X	X	X	X	X	X
DBI	X	X	X	X	X	X	X	X

The suggested thermostats may not be compatible with certain voltages, power and control circuits. Consult the thermostat's user's guide for more information on compatibility.
* Please consult customer service for the exceptions for these models
† The STZW402 thermostat is not compatible with fan-forced units: ARWF, ASKS, ASK, ADR, ACBH, AWF, AWFA, ACF, ARUH and ASHU

ELECTRICAL FUNDAMENTALS

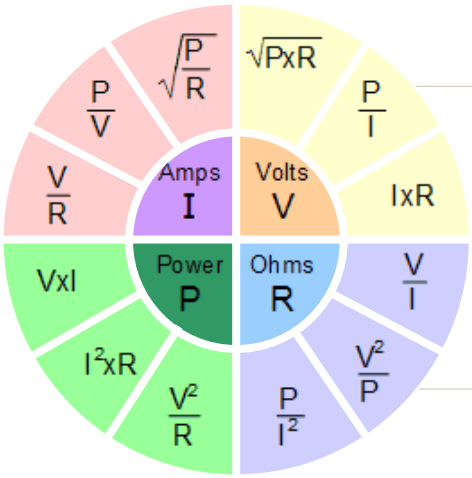

AMPERES = $\frac{\text{VOLTS}}{\text{OHMS}}$; $\frac{\text{WATTS}}{\text{VOLTS}}$; $\sqrt{\frac{\text{WATTS}}{\text{OHMS}}}$

VOLTS = $\sqrt{\text{WATTS x OHMS}}$; $\frac{\text{WATTS}}{\text{AMPERES}}$; AMPERES X OHMS

WATTS = VOLTS X AMPERES ; AMPERES^2 X OHMS ; $\frac{\text{VOLTS}^2}{\text{OHMS}}$

OHM = $\frac{\text{VOLTS}}{\text{AMPERES}}$; $\frac{\text{WATTS}}{\text{AMPERES}^2}$; $\frac{\text{VOLTS}^2}{\text{WATTS}}$

The relationship between wattage (heat) output and the applied voltage of electric resistance heating elements is determined by a precise physical rule defined as OHM's Law which states that the current in a resistance heating element is directly proportional to the applied voltage. OHM's Law is traditionally expressed as:

$I = \frac{V}{R}$ I = amperes (current)
V = voltage
R = OHMs (resistance)

ARE 120 V AND 240 V HEATERS INTERCHANGEABLE?
A 240 V heater run at 120 V will produce 1/4 of the rated wattage. A 120 V heater run at 240 V will be destroyed and could cause fire damage to the building.

IF I KNOW THE BTU'S REQUIRED, HOW DO I CALCULATE THE WATTS REQUIRED?
Watts = BTU/3.412 (1 watt = 3.41 BTU)

COLOR CHART AND SELECTION POLICY

°STELPRO is proud to offer a wide range of colors (see below) to best meet your client's needs, enabling greater flexibility. We have the color you're looking for!

COMING SOON, °STELPRO WILL BE OFFERING NEW DESIGNER COLORS! ASK YOUR °STELPRO REPRESENTATIVE FOR MORE INFORMATION.

Corrosion and heat resistant, our paint is of a very high quality and is easily washable, retaining its original appearance for years to come. For all other color options, please contact your representative. °STELPRO always exceeds your needs.

COLOR CHART & SELECTION POLICY – PLEASE CONTACT FACTORY FOR CLARIFICATION

Standard colors are shown for each product. W = white or SW = silica white (off white); optional special stock °STELPRO colors are available per color chart above. The colors are available on the following stock series – B, BA, SBB, ASHC, AMIR, ASOR, ASIL, ASILVC, ARWF, AWF, ADR and ACF with nominal cost adder of 10%. Please refer to our website for any other series of products.

Series AALUX, DBI, ACBH and AWFA are available as well with no additional surcharge. Note: nominal added lead time.

Custom colors provided per Protech – RAL #'s available with $1,000 net project adder plus 5% adder for painting. Custom paint colors per architect spec will be quoted per project. Customer color lead times, sample chips, etc. must be considered. Please contact factory in such cases.

Anodizing options: please consult factory. Aluminum draft barrier series AALUX and DBI available in several anodized finishes – contact factory for cost and availability.

The colors above are only reproduced for information, they may differ from the real colors. Some of them are metallic, but it is not possible to reproduce this aspect in a printed catalog. Optional colors are available at an additional cost. Returns are not accepted for orders of products with optional colors.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

HEATING

COMFORT
TO WEATHER
ANY STORM

ELECTRIC BASEBOARD

B SERIES

THE REFERENCE ON THE MARKET

The reputation of the B baseboard is well established, it is simply the most recognized and the most appreciated on the market. It stands out with its modern look and rounded corners, along with its unique one-piece construction without end caps, making it the most solid and the most durable baseboard available. The B baseboard assures you better air distribution and is ideal for every room in the house.

LIFETIME on element WARRANTY
5 YEAR WARRANTY

QUIET CONVECTION HEATING

THE MOST SOLID BASEBOARD ON THE MARKET
ONE-PIECE CONSTRUCTION

ROUNDED CORNERS

BETTER AIR DIFFUSION

IDEAL FOR EVERY ROOM IN YOUR HOME

MAY BE CONTROLLED BY A BUILT-IN OR WALL THERMOSTAT (NOT INCLUDED)
ELECTRONIC THERMOSTAT RECOMMENDED

IDEAL FOR:
KITCHENS, LIVING ROOMS, BEDROOMS, OFFICES, BASEMENTS, BUSINESSES

COLORS
- standard: white, silica white
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 22-gauge steel casing able to support 165 lb in its center
- 16-gauge steel connection boxes at each end
- full-length thermal protection with automatic reset
- diffuser located above the element in order to ensure good air diffusion
- full-length wireway

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- built-in thermostat installed in the left or right junction box (optional)
- single pole electronic thermostat installed in the right junction box only (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- low voltage relay kit installed in the left junction box only (optional)

INSTALLATION
- surface mounted
- knockouts for the BX and clamps for the NMD cables located at each end
- mounting holes spaced at 1-inch intervals along the top and the bottom of the unit

ACCESSORIES

PRODUCT	DESCRIPTION
B1T1EFR*	built-in electronic thermostat in Fahrenheit (right side installation only) [120 V-347 V / max 2500 W (12.5 A)]. Factory installed upon request.
B1T1*	built-in single pole thermostat [120 V-600 V]
B2T1*	built-in double pole thermostat [120 V-600 V]
B2T1TP*	built-in tamper-proof double pole thermostat [120 V-600 V]
BRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
BRE156*	built-in electronic low voltage relay [6 A @ 600 V]
BRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
BP*	spray paint white or silica white

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Add W for white or SW for silica white
* Factory installation only

ULTRA-PRECISE ELECTRONIC THERMOSTAT (OPTIONAL)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.** For all the latest models and prices, please refer to our website at www.stelpro.com. * Three years on electronic components and lifetime warranty on the heating element (for original owner).

TECHNICAL SPECIFICATIONS

250 W PER LINEAR FOOT	POWER		VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	VOLTS	IN.	LB
B0301*	300	1024	120	19 7/8	5
B0308*	300	1024	208	19 7/8	5
B0302*	300/225	1024	240/208	19 7/8	5
B0501*	500	1706	120	27 7/8	7
B0508*	500	1706	208	27 7/8	7
B0502*	500/375	1706	240/208	27 7/8	7
B0507*	500/375/280	1706	277/240/208	27 7/8	7
B0751*	750	2560	120	37 5/8	9
B0758*	750	2560	208	37 5/8	9
B0752*	750/560	2560	240/208	37 5/8	9
B0757*	750/560/425	2560	277/240/208	37 5/8	9
B1001*	1000	3413	120	47 1/2	11
B1008*	1000	3413	208	47 1/2	11
B1002*	1000/750	3413	240/208	47 1/2	11
B1007*	1000/750/565	3413	277/240/208	47 1/2	11
B1251*	1250	4266	120	57 1/4	14
B1258*	1250	4266	208	57 1/4	14
B1252*	1250/940	4266	240/208	57 1/4	14
B1257*	1250/940/705	4266	277/240/208	57 1/4	14
B1501*	1500	5119	120	66 1/4	16
B1508*	1500	5119	208	66 1/4	16
B1502*	1500/1125	5119	240/208	66 1/4	16
B1507*	1500/1125/845	5119	277/240/208	66 1/4	16
B1758*	1750	5972	208	76	18
B1752*	1750/1315	5972	240/208	76	18
B1757*	1750/1300/985	5972	277/240/208	76	18
B2008*	2000	6825	208	83 7/8	20
B2002*	2000/1500	6825	240/208	83 7/8	20
B2007*	2000/1500/1125	6825	277/240/208	83 7/8	20
B2258*	2250	7679	208	93 3/4	22
B2252*	2250/1690	7679	240/208	93 3/4	22
B2257*	2250/1690/1265	7679	277/240/208	93 3/4	22
B2508*	2500	8532	208	102 5/8	24
B2502*	2500/1875	8532	240/208	102 5/8	24
B2507*	2500/1875/1405	8532	277/240/208	102 5/8	24

Please note that the width of the units may vary by more or less 1/16 in.
Add HA for the high altitude version (not available on 480 V models)
* Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)

TECHNICAL DRAWINGS

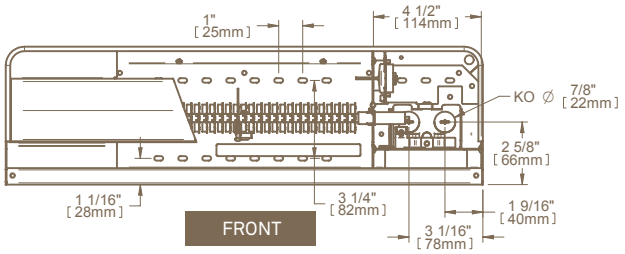



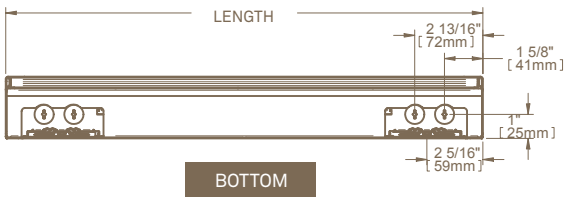

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

HIGH-END BASEBOARD

BA SERIES

NEW PRODUCT

LIFETIME on element 5 YEAR WARRANTY

THE DOLCE VITA WITH BELLA

The high-end BELLA™ baseboard is undoubtedly the most beautiful offered on the market. Its breathtaking design and sturdy facade made of an aluminum extrusion make it the ideal choice for residential and commercial locations. The BELLA™ is available in a choice of two densities: 150 W or 250 W per linear foot.

EXTRUDED ALUMINUM FRONT COVER WITH STRIKING END CAPS

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

IDEAL FOR ANY ROOM IN YOUR HOME
AND MANY COMMERCIAL APPLICATIONS

ACCESSORIES

PRODUCT	DESCRIPTION
BA1T1W*	built-in single pole thermostat [120 V-600 V]
BA2T1W*	built-in double pole thermostat [120 V-600 V]
BARE153*	built-in electronic low voltage relay [15 A @ 120-347 V]
BARE156*	built-in electronic low voltage relay [6 A @ 600 V]
BARE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208-347 V]
BADIS*	disconnect switch [120-480 V]
BADIS6*	disconnect switch [600 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Factory installed
* Factory installation is strongly recommended

IDEAL FOR:
KITCHENS, LIVING ROOMS, BEDROOMS, BASEMENTS, BUSINESSES, OFFICES

COLORS
- standard: white
- optional: silica white, graphite, almond, black, clear anodized (paint), textured charcoal, dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 22-gauge steel cabinet
- extruded aluminum front cover with a thickness equivalent to 11 gauge with molded and curved end-caps
- discrete air inlet: air enters through the front of the unit and exits from the top
- thermal protection with automatic reset
- full-length wireway

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in mechanical single pole or double pole thermostat, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)
- disconnect switch (optional)

INSTALLATION
- floor mounted
- wiring compartment at both ends of unit

The 250 W density can only be installed in commercial locations. The 150 W density can be installed in residential and commercial locations.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. * Lifetime warranty on the heating element (for original owner).

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 250 W PER LINEAR FOOT			LOW DENSITY 150 W PER LINEAR FOOT			VOLTAGE	TOTAL LENGTH*	WEIGHT
FOR COMMERCIAL USE ONLY			FOR RESIDENTIAL AND COMMERCIAL USE					
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
BA0301W	300	1024	---	---	---	120	20 13/16	5.1
BA0308W	300	1024	---	---	---	208	20 13/16	5.1
BA0302W	300/225	1024	---	---	---	240/208	20 13/16	5.1
BA0501W	500	1706	**BAL0301W**	300	1024	120	28 13/16	6.5
BA0508W	500	1706	**BAL0308W**	300	1024	208	28 13/16	6.5
BA0502W	500/375	1706	**BAL0302W**	300/225	1024	240/208	28 13/16	6.5
BA0507W	500	1706	---	300	1024	277	28 13/16	6.5
BA0751W	750	2560	**BAL0451W**	450	1536	120	38 1/2	8.0
BA0758W	750	2560	**BAL0458W**	450	1536	208	38 1/2	8.0
BA0752W	750/560	2560	**BAL0452W**	450/340	1536	240/208	38 1/2	8.0
BA0757W	750	2560	**BAL0457W**	450	1536	277	38 1/2	8.0
BA0755W	750	2560	---	450	1536	480	38 1/2	8.0
BA1001W	1000	3413	**BAL0601W**	600	2048	120	48 3/8	9.7
BA1008W	1000	3413	**BAL0608W**	600	2048	208	48 3/8	9.7
BA1002W	1000/750	3413	**BAL0602W**	600/450	2048	240/208	48 3/8	9.7
BA1007W	1000	3413	**BAL0607W**	600	2048	277	48 3/8	9.7
BA1005W	1000	3413	---	600	2048	480	48 3/8	9.7
BA1251W	1250	4266	**BAL0751W**	750	2560	120	58 3/16	11.4
BA1258W	1250	4266	**BAL0758W**	750	2560	208	58 3/16	11.4
BA1252W	1250/940	4266	**BAL0752W**	750/560	2560	240/208	58 3/16	11.4
BA1257W	1250	4266	**BAL0757W**	750	2560	277	58 3/16	11.4
BA1255W	1250	4266	**BAL0755W**	750	2560	480	58 3/16	11.4
BA1501W	1500	5119	**BAL0901W**	900	3071	120	67 3/16	13.2
BA1508W	1500	5119	**BAL0908W**	900	3071	208	67 3/16	13.2
BA1502W	1500/1125	5119	**BAL0902W**	900/675	3071	240/208	67 3/16	13.2
BA1507W	1500	5119	**BAL0907W**	900	3071	277	67 3/16	13.2
BA1505W	1500	5119	**BAL0905W**	900	3071	480	67 3/16	13.2
---	1750	5972	**BAL1051W**	1050	3583	120	76 7/8	15.0
BA1758W	1750	5972	**BAL1058W**	1050	3583	208	76 7/8	15.0
BA1752W	1750/1310	5972	**BAL1052W**	1050/790	3583	240/208	76 7/8	15.0
BA1757W	1750	5972	**BAL1057W**	1050	3583	277	76 7/8	15.0
BA1755W	1750	5972	**BAL1055W**	1050	3583	480	76 7/8	15.0
---	2000	6825	**BAL1201W**	1200	4095	120	84 13/16	16.9
BA2008W	2000	6825	**BAL1208W**	1200	4095	208	84 13/16	16.9
BA2002W	2000/1500	6825	**BAL1202W**	1200/900	4095	240/208	84 13/16	16.9
BA2007W	2000	6825	**BAL1207W**	1200	4095	277	84 13/16	16.9
BA2005W	2000	6825	**BAL1205W**	1200	4095	480	84 13/16	16.9
BA2258W	2250	7679	**BAL1358W**	1350	4607	208	94 11/16	18.8
BA2252W	2250/1690	7679	**BAL1352W**	1350/1010	4607	240/208	94 11/16	18.8
BA2257W	2250	7679	**BAL1357W**	1350	4607	277	94 11/16	18.8
BA2255W	2250	7679	**BAL1355W**	1350	4607	480	94 11/16	18.8
BA2508W	2500	8532	**BAL1508W**	1500	5119	208	103 1/2	20.7
BA2502W	2500/1875	8532	**BAL1502W**	1500/1125	5119	240/208	103 1/2	20.7
BA2507W	2500	8532	**BAL1507W**	1500	5119	277	103 1/2	20.7
BA2505W	2500	8532	**BAL1505W**	1500	5119	480	103 1/2	20.7

* For wall length, subtract 1/2 in. from the total length
--- not available

TECHNICAL DRAWINGS

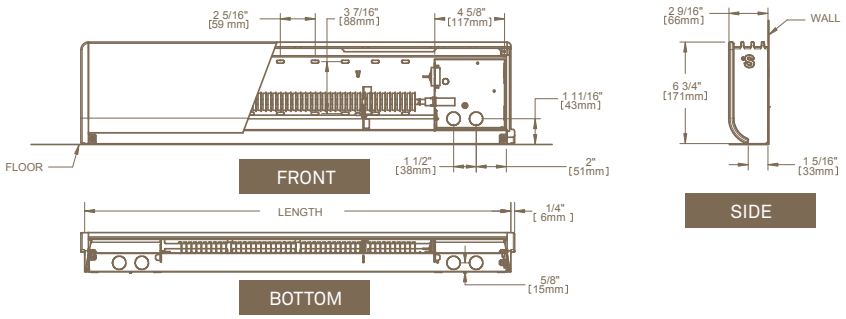

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

COMPACT MULTIPURPOSE BASEBOARD

SBB SERIES

A BREAKTHROUGH IN PERFORMANCE & DESIGN

Looking for the sleekest and newest baseboard ever to heat a living room, kitchen, bedroom or even an office, without taking up too much wall space? The compact multipurpose SBB baseboard fits the bill perfectly with three densities available. On top of being quick and easy to install, the SBB can be up to 30% shorter than conventional baseboards without sacrificing power and security.

NEW PRODUCT

LIFETIME on element WARRANTY — 5 YEAR WARRANTY

UP TO 30% SHORTER THAN CONVENTIONAL BASEBOARDS
FREEING UP PRECIOUS WALL SPACE

OPTIMAL PERFORMANCE AND SAFETY COMBINED WITH EASE OF INSTALLATION

OFFERED IN THREE DIFFERENT WATT DENSITIES
TO MEET THE NEEDS OF ANY PROJECT IN THE HOME AND OFFICE

IDEAL FOR:
KITCHENS, LIVING ROOMS, BEDROOMS, BASEMENTS, OFFICES

ACCESSORIES

PRODUCT	DESCRIPTION
SBBT1*	built-in single pole thermostat [120 V-600 V]
SBBT2*	built-in double pole thermostat [120 V-600 V]
SBBT1TP**	built-in tamper-proof single pole thermostat [120 V-600 V]
SBBT2TP**	built-in tamper-proof double pole thermostat [120 V-600 V]
SBBRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
SBBRE156*	built-in electronic low voltage relay [6 A @ 600 V]
SBBRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
SBBR841C1151*	built-in mechanical low voltage relay with transformer 24 V [6000 W @ 600 V]
SBBR841D1036*	built-in mechanical low voltage relay w/o transformer 24 V [6000 W @ 120 V-600 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Add W for white or BK for black (white unit supplied with a white knob and silica white or optional colored units supplied with a black knob)
* Factory installed * Factory installation is strongly recommended

PART OF THE ASHC FAMILY OF PRODUCTS

NEED A CONVECTOR?
SEE PAGE 18

COLORS
- standard: white, silica white
- optional: almond, black, clear anodized (paint), textured charcoal, dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 22-gauge steel cabinet and 18-gauge steel one-piece front able to support up to 242 lb (110 kg) in its center
- full-length thermal protection with automatic reset
- discrete air inlet and top air discharge to maximize air flow
- full-length wireway
- steel end caps with soft, rounded corners

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in single or double pole mechanical thermostat installed in the left or right junction box (optional)
- built-in tamper-proof single or double pole mechanical thermostat installed in the left or right junction box (optional)
- low voltage relay kit installed in the right junction box only (optional)

INSTALLATION
- floor mounted
- wiring compartment at both ends of unit

The 350 W and 275 W densities can only be installed in commercial locations. The 200 W density can be installed in residential and commercial locations.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. *Lifetime warranty on the heating element (for original owner).

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 350 W PER LINEAR FOOT *			MEDIUM DENSITY 275 W PER LINEAR FOOT *			LOW DENSITY 200 W PER LINEAR FOOT *			VOLTAGE	LENGTH	WEIGHT
FOR COMMERCIAL USE ONLY						FOR RESIDENTIAL AND COMMERCIAL USE					
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
SBB240501	500	1706	**SBB240401**	400	1365	**SBB240301**	300	1024	120	24	5.7
SBB240508	500	1706	**SBB240408**	400	1365	**SBB240308**	300	1024	208	24	5.7
SBB240502	500/375	1706	**SBB240402**	400/300	1365	**SBB240302**	300/225	1024	240/208	24	5.7
SBB240507	500/375/280	1706	**SBB240407**	400/300/225	1365	**---**	---	---	277/240/208	24	5.7
SBB300751	750	2560	**SBB300601**	600	2048	**SBB300451**	450	1536	120	30	6.7
SBB300758	750	2560	**SBB300608**	600	2048	**SBB300458**	450	1536	208	30	6.7
SBB300752	750/560	2560	**SBB300602**	600/450	2048	**SBB300452**	450/340	1536	240/208	30	6.7
SBB300757	750/560/420	2560	**SBB300607**	600/450/340	2048	**SBB300457**	450/340/255	1536	277/240/208	30	6.7
SBB300755	750	2560	**---**	---	---	**---**	---	---	480	30	6.7
SBB361001	1000	3413	**SBB360801**	800	2730	**SBB360601**	600	2048	120	36	7.7
SBB361008	1000	3413	**SBB360808**	800	2730	**SBB360608**	600	2048	208	36	7.7
SBB361002	1000/750	3413	**SBB360802**	800/600	2730	**SBB360602**	600/450	2048	240/208	36	7.7
SBB361007	1000/750/560	3413	**SBB360807**	800/600/450	2730	**SBB360607**	600/450/340	2048	277/240/208	36	7.7
SBB361005	1000	3413	**SBB360805**	800	2730	**SBB360605**	600	2048	480	36	7.7
SBB421251	1250	4266	**SBB421001**	1000	3413	**SBB420751**	750	2560	120	42	8.7
SBB421258	1250	4266	**SBB421008**	1000	3413	**SBB420758**	750	2560	208	42	8.7
SBB421252	1250/940	4266	**SBB421002**	1000/750	3413	**SBB420752**	750/560	2560	240/208	42	8.7
SBB421257	1250/940/705	4266	**SBB421007**	1000/750/560	3413	**SBB420757**	750/560/420	2560	277/240/208	42	8.7
SBB421255	1250	4266	**SBB421005**	1000	3413	**SBB420755**	750	2560	480	42	8.7
SBB481501	1500	5119	**SBB481201**	1200	4095	**SBB480901**	900	3071	120	48	9.7
SBB481508	1500	5119	**SBB481208**	1200	4095	**SBB480908**	900	3071	208	48	9.7
SBB481502	1500/1125	5119	**SBB481202**	1200/900	4095	**SBB480902**	900/675	3071	240/208	48	9.7
SBB481507	1500/1125/845	5119	**SBB481207**	1200/900/675	4095	**SBB480907**	900/675/510	3071	277/240/208	48	9.7
SBB481505	1500	5119	**SBB481205**	1200	4095	**SBB480905**	900	3071	480	48	9.7
---	---	---	**SBB541401**	1400	4778	**SBB541051**	1050	3583	120	54	10.7
SBB541758	1750	5972	**SBB541408**	1400	4778	**SBB541058**	1050	3583	208	54	10.7
SBB541752	1750/1310	5972	**SBB541402**	1400/1050	4778	**SBB541052**	1050/790	3583	240/208	54	10.7
SBB541757	1750/1310/985	5972	**SBB541407**	1400/1050/790	4778	**SBB541057**	1050/790/590	3583	277/240/208	54	10.7
SBB541755	1750	5972	**SBB541405**	1400	4778	**SBB541055**	1050	3583	480	54	10.7
---	---	---	**SBB601601**	1600	5460	**SBB601201**	1200	4095	120	60	11.7
SBB602008	2000	6825	**SBB601608**	1600	5460	**SBB601208**	1200	4095	208	60	11.7
SBB602002	2000/1500	6825	**SBB601602**	1600/1200	5460	**SBB601202**	1200/900	4095	240/208	60	11.7
SBB602007	2000/1500/1125	6825	**SBB601607**	1600/1200/900	5460	**SBB601207**	1200/900/675	4095	277/240/208	60	11.7
SBB602005	2000	6825	**SBB601605**	1600	5460	**SBB601205**	1200	4095	480	60	11.7
---	---	---	**---**	---	---	**SBB661351**	1350	4607	120	66	12.7
SBB662258	2250	7679	**SBB661808**	1800	6143	**SBB661358**	1350	4607	208	66	12.7
SBB662252	2250/1690	7679	**SBB661802**	1800/1350	6143	**SBB661352**	1350/1010	4607	240/208	66	12.7
SBB662257	2250/1690/1265	7679	**SBB661807**	1800/1350/1010	6143	**SBB661357**	1350/1010/760	4607	277/240/208	66	12.7
SBB662255	2250	7679	**SBB661805**	1800	6143	**SBB661355**	1350	4607	480	66	12.7
---	---	---	**---**	---	---	**SBB721501**	1500	5119	120	72	13.7
SBB722508	2500	8532	**SBB722008**	2000	6825	**SBB721508**	1500	5119	208	72	13.7
SBB722502	2500/1875	8532	**SBB722002**	2000/1500	6825	**SBB721502**	1500/1125	5119	240/208	72	13.7
SBB722507	2500/1875/1410	8532	**SBB722007**	2000/1500/1125	6825	**SBB721507**	1500/1125/845	5119	277/240/208	72	13.7
SBB722505	2500	8532	**SBB722005**	2000	6825	**SBB721505**	1500	5119	480	72	13.7

Add W for white ou SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
* Average densities shown
--- not available

TECHNICAL DRAWINGS

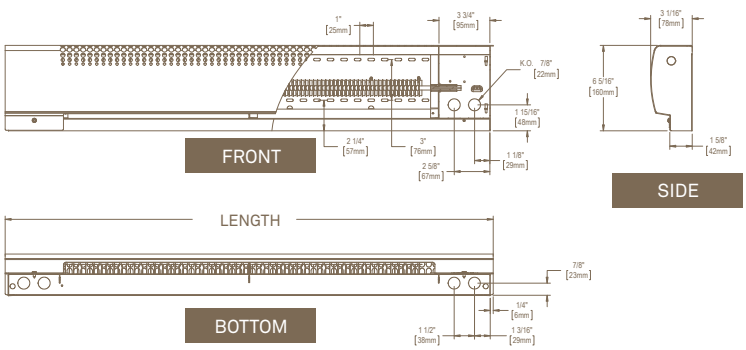

ELECTRONIC CONVECTOR

ASHC SERIES

HEATING NEVER LOOKED SO GOOD

Our ASHC convector has rounded sides and beautiful modern lines that are sure to please you. It is available either with an ultra-accurate built-in electronic thermostat or without, leaving you the option to control it the way you want. This unit is good-looking, available in different colors and is offered in all voltages making it adaptable to both commercial and residential applications. A real gem!

5 YEAR* WARRANTY

EXCELLENT VALUE
AND BLENDS IN WITH ALL DECORS

INNOVATIVE LOOK
ROUNDED EDGES AND MODERN LINES

TOTALLY QUIET

BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)
WITH A BACKLIGHT THAT CAN SERVE AS A NIGHTLIGHT (120 V TO 240 V MODELS)

ADAPTS TO MULTIPLE MARKETS
MANY VOLTAGES AVAILABLE: 120 V, 208 V, 240 V, 277 V AND 480 V

IDEAL FOR:
KITCHENS, LIVING ROOMS, BEDROOMS, OFFICES, BASEMENTS, COMMERCIAL BUILDINGS

COLORS
- standard: white, silica white
- luxurious finish: stainless steel (surcharge)
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
- 22-gauge steel cabinet and 20-gauge steel front
- the cabinet height improves the chimney effect
- bottom air intake and front air discharge

ELEMENTS
two stainless steel tubular sheathed elements isolated with nylon sleeves reducing expansion and contraction noises

CONTROL
electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)

INSTALLATION
- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)

PART OF THE ASHC FAMILY OF PRODUCTS



NEED A BASEBOARD?
SEE PAGE 16

ALSO AVAILABLE: SEMI-PERMANENT INSTALLATION MODEL
QUICK PLUG-IN INTO RESIDENTIAL 120 V OUTLET

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.** For all the latest models and prices, please refer to our website at www.stelpro.com. * Three years on electronic components.

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT	WITHOUT THERMOSTAT	POWER		VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	CODE	WATTS	BTU/H	VOLTS	IN.	IN.	LB
ASHC0501	**ASHC0501WC**	500	1706	120	17 9/16	17 5/16	11.2
ASHC0508	**ASHC0508WC**	500	1706	208	17 9/16	17 5/16	11.2
ASHC0502	**ASHC0502WC**	500/375	1706	240/208	17 9/16	17 5/16	11.2
---	**ASHC0507WC**	500	1706	277	17 9/16	17 5/16	11.2
ASHC1001	**ASHC1001WC**	1000	3413	120	17 9/16	22 7/8	13.3
ASHC1008	**ASHC1008WC**	1000	3413	208	17 9/16	22 7/8	13.3
ASHC1002	**ASHC1002WC**	1000/750	3413	240/208	17 9/16	22 7/8	13.3
---	**ASHC1007WC**	1000	3413	277	17 9/16	22 7/8	13.3
---	**ASHC1005WC**	1000	3413	480	17 9/16	22 7/8	13.3
ASHC1501	**ASHC1501WC**	1500	5119	120	17 9/16	28 5/8	15.7
ASHC1508	**ASHC1508WC**	1500	5119	208	17 9/16	28 5/8	15.7
ASHC1502	**ASHC1502WC**	1500/1125	5119	240/208	17 9/16	28 5/8	15.7
---	**ASHC1507WC**	1500	5119	277	17 9/16	28 5/8	15.7
---	**ASHC1505WC**	1500	5119	480	17 9/16	28 5/8	15.7
ASHC2008	**ASHC2008WC**	2000	6825	208	17 9/16	35	18.9
ASHC2002	**ASHC2002WC**	2000/1500	6825	240/208	17 9/16	35	18.9
---	**ASHC2007WC**	2000	6825	277	17 9/16	35	18.9
---	**ASHC2005WC**	2000	6825	480	17 9/16	35	18.9

Add W for white, SW for silica white or SS for stainless steel (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.
--- not available

MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)

BUILT-IN THERMOSTAT	POWER	VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	WATTS	VOLTS	IN.	IN.	LB
ASHC1501PW	1500	120	17 9/16	28 5/8	15.7

ACCESSORIES

PRODUCT	DESCRIPTION
SHCRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
SHCRE156*	built-in electronic low voltage relay [6 A @ 600 V]
SHCRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Factory installed

TECHNICAL DRAWINGS

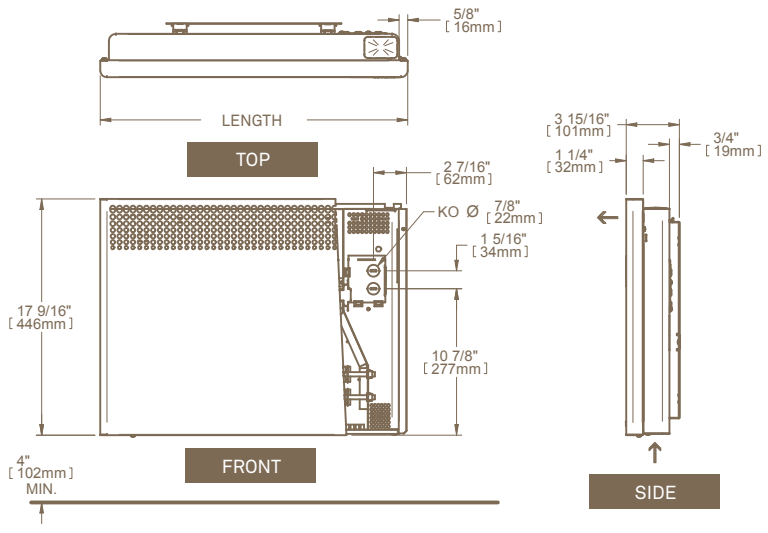

BUILT-IN ELECTRONIC THERMOSTAT
AVAILABLE FOR THE 120 V TO 240 V MODELS

STAINLESS STEEL MODEL (SS) WITH BLACK CABINET

ELECTRONIC CONVECTOR

AMIR SERIES

MIRAGE™

THE MOST DISCREET ON THE MARKET!

The new MIRAGE™ electronic convector is the result of a combination of a unique look that is modern and discreet, paired with unquestionable efficiency.

Available with an ultra precise integrated electronic thermostat or no thermostat and in several voltages, the MIRAGE™ is suitable for rooms in both the home and business. The MIRAGE™ blends with any decor with its simple facade and elegant design.

COMING FALL 2016

5 YEAR* WARRANTY

HARMONIZES DISCREETLY WITH ANY DECOR

NEW STYLISH WHITE SATIN FINISH

STURDY ONE-PIECE FRONT PANEL

TOTALLY QUIET

BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)
WITH A BACKLIGHT THAT CAN SERVE AS A NIGHTLIGHT (120 V TO 240 V MODELS)

IDEAL FOR:

KITCHENS, LIVING ROOMS, BEDROOMS, BASEMENTS, COMMERCIAL BUILDINGS, OFFICES

COLORS

- standard: white, silica white
- luxurious finish: stainless steel (surcharge)
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 20-gauge steel cabinet and front
- the cabinet height improves the chimney effect
- bottom air intake and top air discharge

ELEMENTS

two stainless steel tubular sheathed elements isolated with nylon sleeves reducing expansion and contraction noises

CONTROL

- electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)
- automatic lowering of temperature at night (Automatic mode)
- lock option at a maximum temperature set point (Security mode)

INSTALLATION

- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)

PLUG 120 V

ALSO AVAILABLE: SEMI-PERMANENT INSTALLATION MODEL

QUICK PLUG-IN INTO RESIDENTIAL 120 V OUTLET

*STELPRO reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. **Returns are not accepted for orders of products with optional colors.** For all the latest models and updated prices, please refer to our website at www.stelpro.com. * Three years on electronic components.

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT	WITHOUT THERMOSTAT	POWER		VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	CODE	WATTS	BTU/H	VOLTS	IN.	IN.	LB
AMIR0501	**AMIR0501WC**	500	2048	120	18	17 1/2	11.75
AMIR0508	**AMIR0508WC**	500	2048	208	18	17 1/2	11.75
AMIR0502	**AMIR0502WC**	500/375	2048	240/208	18	17 1/2	11.75
---	**AMIR0507WC**	500	2048	277	18	17 1/2	11.75
AMIR1001	**AMIR1001WC**	1000	3413	120	18	23 1/2	14.75
AMIR1008	**AMIR1008WC**	1000	3413	208	18	23 1/2	14.75
AMIR1002	**AMIR1002WC**	1000/750	3413	240/208	18	23 1/2	14.75
---	**AMIR1007WC**	1000	3413	277	18	23 1/2	14.75
---	**AMIR1005WC**	1000	3413	480	18	23 1/2	14.75
AMIR1501	**AMIR1501WC**	1500	5119	120	18	29 1/2	17.75
AMIR1508	**AMIR1508WC**	1500	5119	208	18	29 1/2	17.75
AMIR1502	**AMIR1502WC**	1500/1125	5119	240/208	18	29 1/2	17.75
---	**AMIR1507WC**	1500	5119	277	18	29 1/2	17.75
---	**AMIR1505WC**	1500	5119	480	18	29 1/2	17.75
AMIR2008	**AMIR2008WC**	2000	6825	208	18	35 1/2	20.75
AMIR2002	**AMIR2002WC**	2000/1500	6825	240/208	18	35 1/2	20.75
---	**AMIR2007WC**	2000	6825	277	18	35 1/2	20.75
---	**AMIR2005WC**	2000	6825	480	18	35 1/2	20.75

Add W for white, SW for silica white or SS for stainless steel (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.
--- not available

MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)

BUILT-IN THERMOSTAT	POWER	VOLTAGE	HEIGHT	LENGTH	WEIGHT
CODE	WATTS	VOLTS	IN.	IN.	LB
AMIR1501PW	1500	120	18	29 1/2	17.75

TECHNICAL DRAWINGS

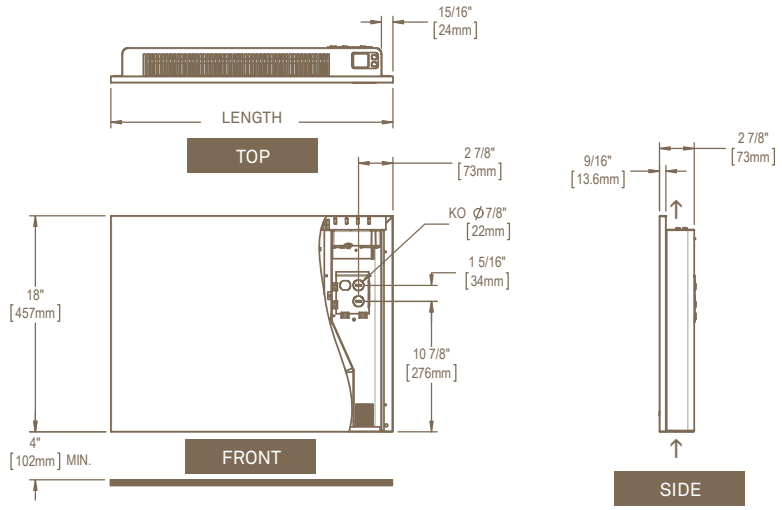

ACCESSORIES

PRODUCT	DESCRIPTION
MIRRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
MIRRE156*	built-in electronic low voltage relay [6 A @ 600 V]
MIRRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Factory installed

BUILT-IN ELECTRONIC THERMOSTAT
AVAILABLE FOR THE 120 V TO 240 V MODELS

HIGH-END CONVECTOR

ASOR SERIES PATENT PENDING

ORLÉANS™

CANADIAN INNOVATION FOR THE BENEFIT OF COMFORT

°STELPRO has reinvented the convector with the new ORLÉANS™ high-end convector. With its unique design, the ORLÉANS™ offers a rise in temperature faster than any other convector on the market, ensuring optimal comfort in no time at all. The optional built-in thermostat is equipped with the ZigBee protocol, so it can be connected to the smart home. In addition, the convector is available in optional colors exclusive to °STELPRO, colors that will enhance even the most simple decor. Energy efficiency, connectivity, adjusted profile and a wide variety of models, the ORLÉANS™ is now the benchmark for high-end convectors.

COMING FALL 2016

5 YEAR* WARRANTY

30% SLIMMER CONVECTOR*
STYLISH AND COMPACT DESIGN

OPTIMUM EFFICIENCY
TEMPERATURE RISE 25% FASTER*

BUILT-IN THERMOSTAT AVAILABLE (OPTIONAL)
READY FOR THE SMART HOME

QUICK AND EASY INSTALLATION
EXCLUSIVE BRACKET SYSTEM

NEW STYLISH WHITE SATIN FINISH

IDEAL FOR:

LIVING ROOMS, KITCHENS, BEDROOMS, OFFICES, HALLWAYS, BASEMENTS, BUSINESSES, WAITING ROOMS, CONFERENCE ROOMS

COLORS
- standard: white, silica white
- ORORA (optional): jean blue, midnight blue, turquoise, moss green, canary yellow, red, orange, almond, aluminum paint, gravel gray, textured charcoal, brown, black (10 % surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 20-gauge steel cabinet and front
- aluminum grille and front of sides
- bottom air intake and top air discharge
- the cabinet height improves the chimney effect
- safe, rounded corners
- easy access to controls
- thermal protection with automatic reset

ELEMENT
quiet element designed for increased heat dissipation

CONTROL
- built-in thermostat equipped with the ZigBee protocol
- consumption indicator going from green or red depending on the required set temperature
- open window detector

INSTALLATION
- surface
- wall mounted at least 4 in. from the floor
- innovative mounting bracket facilitating height adjustment

* Compared to similar convectors. Heat rise tested in laboratory.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT	WITHOUT THERMOSTAT	POWER	VOLTAGE	LENGTH		WEIGHT	
CODE	CODE	WATTS	VOLTS	MM	IN.	KG	LB
HIGH MODEL - height of 27 7/8 in. (708 mm)							
ASORH1002	**ASORH1002WC**	1000/750	240/208	457	18	6.8	15
ASORH1502	**ASORH1502WC**	1500/1125	240/208	623	24 1/2	8.8	19.4
ASORH2002	**ASORH2002WC**	2000/1500	240/208	768	30 1/4	10.5	23.2
LOW MODEL - height of 13 in. (330 mm)							
ASORL1002	**ASORL1002WC**	1000/750	240/208	750	19 1/2	5.2	11.5
ASORL1502	**ASORL1502WC**	1500/1125	240/208	1113	38 7/8	6.9	15.2
ASORL2002	**ASORL2002WC**	2000/1500	240/208	1276	50 1/4	8.3	18.3
STANDARD MODEL - height of 17 7/8 in. (455 mm)							
ASOR0502	**ASOR0502WC**	500/375	240/208	457	18	4.8	10.7
ASOR1002	**ASOR1002WC**	1000/750	240/208	597	23 1/2	6	13.2
ASOR1502	**ASOR1502WC**	1500/1125	240/208	743	29 1/4	7.2	15.9
ASOR2002	**ASOR2002WC**	2000/1500	240/208	895	35 1/4	9.7	21.4

Add W for white or SW for silica white(1000 W, 1500 W and 2000 W models only) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Thermostat included except WC = without control.

TECHNICAL DRAWINGS

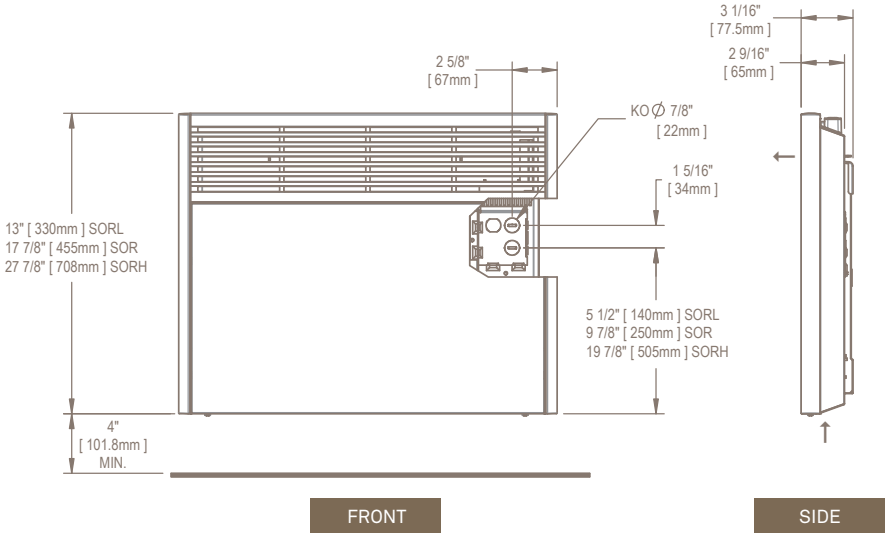

FRONT SIDE

CONTROL

BUILT-IN ELECTRONIC THERMOSTAT READY FOR THE SMART HOME (OPTIONAL)

CONTROL THE TEMPERATURE FROM YOUR SMARTPHONE, TABLET AND COMPUTER

ZigBee®
COMPATIBLE CONTROLLER REQUIRED

ELECTRONIC CONVECTOR

ASIL SERIES

Silhouette™

UPGRADE YOUR COMFORT

The stylish SILHOUETTE™ generates warmth and comfort wherever it's installed. Its unique unobtrusive design blends in with every decor. Its front-panel grille points downward and its rounded corners make the SILHOUETTE™ an elegant, yet efficient convector choice. What's more, it features a built-in electronic thermostat with a backlit screen that can be used as a night light. The SILHOUETTE™ comes in a wide variety of models and colors to suit every taste. For home, office or business, the SILHOUETTE™ convector offers the utmost in aesthetics and functionality.

THE CHOICE OF EXPERTS

MAXIMUM POWER AND TOTALLY QUIET
THANKS TO ITS X-SHAPED ELEMENT

LARGE CHOICE OF MODELS AND COLORS

AVAILABLE WITH A BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)
WITH BACKLIT SCREEN

STAINLESS STEEL MODEL (SS)

PART OF THE SILHOUETTE™ FAMILY OF PRODUCTS

NEED A CONVECTOR FOR YOUR BATHROOM?
SEE PAGE 26

IDEAL FOR:
KITCHENS, LIVING ROOMS, BEDROOMS, OFFICES, BASEMENTS, COMMERCIAL BUILDINGS

COLORS
- standard: white
- luxurious finish: stainless steel (surcharge)
- optional: silica white, almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
- 20-gauge steel cabinet and front
- bottom air intake and front air discharge
- the cabinet height improves the chimney effect
- safe, rounded corners
- easy access to controls
- thermal protection with automatic reset

ELEMENT
aluminum extrusion, X-shaped one-piece to generate maximum heat

CONTROL
- electronic thermostat required: built-in with LCD display (ASIL series), wall single programming (TE series) or wall multiple programming (PT series)
- automatic temperature lowering at night (Automatic mode)
- lock option at a maximum temperature set point (Security mode)

INSTALLATION
- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed wall mounting bracket (included)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. * Three years on electronic components.

TECHNICAL SPECIFICATIONS

ASIL SERIES BUILT-IN THERMOSTAT	TE SERIES* WALL THERMOSTAT	PT SERIES* WALL THERMOSTAT	WITHOUT THERMOSTAT	POWER		VOLTAGE	LENGTH	WEIGHT
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	IN.	LB
HIGH MODEL - height of 25 1/2 in.								
ASILH07	ASILH07TE	ASILH07PT	ASILH07WC	750/560	2560	240/208	16 1/2	16.3
ASILH10	ASILH10TE	ASILH10PT	ASILH10WC	1000/750	3413	240/208	18	17.5
ASILH12	ASILH12TE	ASILH12PT	ASILH12WC	1250/940	4266	240/208	22	20.8
ASILH15	ASILH15TE	ASILH15PT	ASILH15WC	1500/1125	5119	240/208	26 1/2	24.3
ASILH17	ASILH17TE	ASILH17PT	ASILH17WC	1750/1315	5972	240/208	29 1/4	26.5
ASILH20	ASILH20TE	ASILH20PT	ASILH20WC	2000/1500	6825	240/208	32 1/4	29.2
ASILH25	ASILH25TE	ASILH25PT	ASILH25WC	2500/1875	8532	240/208	38 1/2	36.8
ASILH30	ASILH30TE	ASILH30PT	ASILH30WC	3000/2250	10 238	240/208	45	44.0
LOW MODEL - height of 13 in.								
ASILL07	ASILL07TE	ASILL07PT	ASILL07WC	750/560	2560	240/208	25 3/4	16.0
ASILL10	ASILL10TE	ASILL10PT	ASILL10WC	1000/750	3413	240/208	28 1/2	18.0
ASILL12	ASILL12TE	ASILL12PT	ASILL12WC	1250/940	4266	240/208	31 1/2	20.0
ASILL15	ASILL15TE	ASILL15PT	ASILL15WC	1500/1125	5119	240/208	37	21.2
ASILL17	ASILL17TE	ASILL17PT	ASILL17WC	1750/1315	5972	240/208	39 1/4	23.0
ASILL20	ASILL20TE	ASILL20PT	ASILL20WC	2000/1500	6825	240/208	42 3/4	24.7
ASILL25	ASILL25TE	ASILL25PT	ASILL25WC	2500/1875	8532	240/208	49	34.0
ASILL30	ASILL30TE	ASILL30PT	ASILL30WC	3000/2250	10 238	240/208	55 1/2	38.6
STANDARD MODEL - height of 17 3/8 in.								
ASIL05	ASIL05TE	ASIL05PT	ASIL05WC	500/375	1706	240/208	18	13.5
ASIL07	ASIL07TE	ASIL07PT	ASIL07WC	750/560	2560	240/208	20 3/4	15.2
ASIL10	ASIL10TE	ASIL10PT	ASIL10WC	1000/750	3413	240/208	23 1/2	17.1
ASIL12	ASIL12TE	ASIL12PT	ASIL12WC	1250/940	4266	240/208	26 1/2	19.0
ASIL15	ASIL15TE	ASIL15PT	ASIL15WC	1500/1125	5119	240/208	29 1/4	20.7
ASIL17	ASIL17TE	ASIL17PT	ASIL17WC	1750/1315	5972	240/208	32 1/4	22.6
ASIL20	ASIL20TE	ASIL20PT	ASIL20WC	2000/1500	6825	240/208	35 1/4	24.8
ASIL25	ASIL25TE	ASIL25PT	ASIL25WC	2500/1875	8532	240/208	41 1/2	33.7
ASIL30	ASIL30TE	ASIL30PT	ASIL30WC	3000/2250	10 238	240/208	49 1/2	37.2

Add W for white or SS for stainless steel (1000 W models only) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Thermostat included except WC = without control. Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.
* TE series - single programming / * PT series - multiple programming

CONTROLS

BUILT-IN ELECTRONIC THERMOSTAT
ASIL SERIES

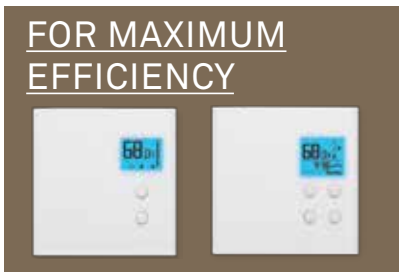

ELECTRONIC WALL THERMOSTATS (TE SERIES - SINGLE PROGRAMMING AND PT SERIES- MULTIPLE PROGRAMMING)
STE402NP AND STE402P SERIES - MORE DETAILS ON PAGES 86-87

TECHNICAL DRAWINGS

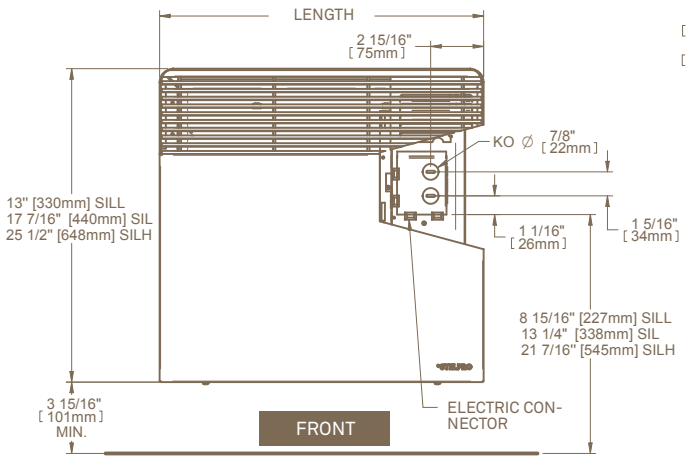

ELECTRONIC CONVECTOR

FOR BATHROOMS - ASILVC SERIES

Silhouette™

SAY GOODBYE TO BATHROOM SHIVERS!

Never before has a bathroom convector felt more at home! Made for bathroom installation, the °STELPRO ASILVC holds the key to uniform air flow at your fingertips. Its own electronic thermostat with built-in timer ensures a perfect heat wave in your bathroom. The ASILVC can be used in either convector mode or forced-air mode. In convection mode (500 W or 750 W, depending on the model) it's completely silent, and with forced-air heating (1500 W or 2000 W, depending on the model), you won't even know it's there.

ULTRA-QUIET: ZERO DECIBELS

BUILT-IN ELECTRONIC THERMOSTAT

60-MINUTE TIMER
FOR OPTIMAL OUTPUT

IDEAL FOR:
BATHROOMS

COLORS
- standard: white
- luxurious finish: stainless steel (surcharge)
- optional: silica white, almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
20-gauge steel cabinet and front

ELEMENT
nichrome element produces instant heat

CONTROL
- built-in electronic thermostat for regular 500 W heating (included with ASILVC1560) and 750 W (included with ASILVC2060)
- 60-minute built-in timer for rapid 1500 W (included with ASILVC1560) and 2000 W (included with ASILVC2060) forced-air heating

INSTALLATION
- surface mounted
- recessed into the wall (opening: 11 1/4 in. x 18 1/4 in. for ASILVC1560 and 14 3/4 in. x 18 1/4 in. for ASILVC2060)
- wall mounted at least 4 in. from the floor

PART OF THE SILHOUETTE™ FAMILY OF PRODUCTS

NEED A CONVECTOR?
SEE PAGE 24

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. * Three years on electronic components.

TECHNICAL SPECIFICATIONS

PRODUCT	CONVECTION	FORCED-AIR	POWER	VOLTAGE	HEIGHT	WIDTH	WEIGHT
CODE	WATTS	WATTS	BTU/H	VOLTS	IN.	IN.	LB
ASILVC1560	500/375	1500/1125	5119	240/208	19 1/4	13 3/8	18
ASILVC2060	750/560	2000/1500	6825	240/208	19 1/4	16 5/8	24.5

Add W for white or SS for stainless steel (see page 10 for optional colors and contact your ºSTELPRO representative for all other colors)

THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE	HEAT RISE
KW	FT.	ºF
1.5	4	130
2	3'9"	113

TECHNICAL DRAWINGS

ASILVC1560 MODEL

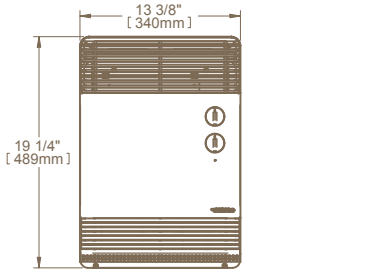



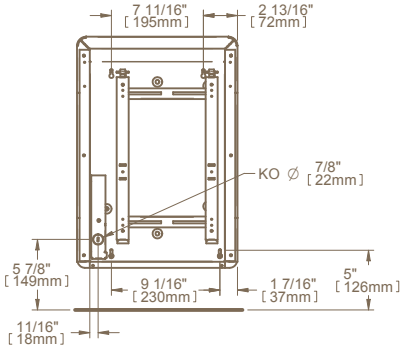

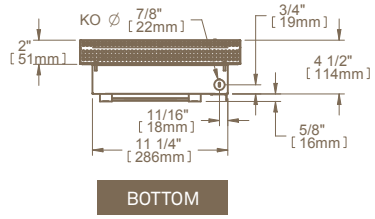

ASILVC2060 MODEL





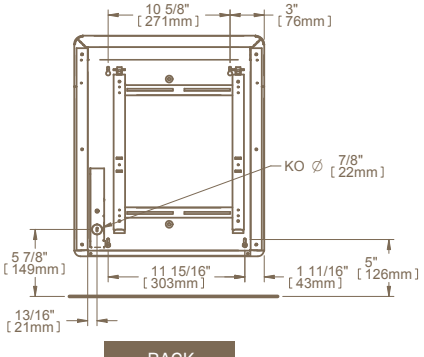

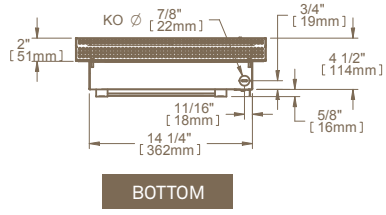

WALL FAN HEATER

ARWF SERIES

Pulsair™

THE GOLD STANDARD IN FAN HEATERS

The PULSAIR™ is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). In addition, it can be mounted vertically or horizontally, directing the air flow upward or downward and to the right or to the left, respectively. Last, the slim-line PULSAIR™ can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for the hallway and bathroom, it can also be installed in other parts of the house, such as the office or in commercial buildings. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 277 V, the PULSAIR™ is recognized and recommended by those in the know.

5 YEAR WARRANTY

THE QUIETEST WALL FAN HEATER ON THE MARKET

NICHROME ELEMENT FOR INSTANT HEAT

MULTIPLE INSTALLATION OPTIONS
RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

THE MOST RESISTANT GRILLE ON THE MARKET

IDEAL FOR:
HALLWAYS, BATHROOMS, LOCKER ROOMS, OFFICES

ACCESSORIES

PRODUCT	DESCRIPTION
ARWFT1**	built-in single pole thermostat [120 V-347 V]
ARWFT2*	built-in double pole thermostat [120 V-347 V]
RWFSAW	surface adapter (white)
RWFSASW	surface adapter (silica white)
RWFDIS277	disconnect switch [120 V-277 V] (factory installed)
RWFDIS600	disconnect switch [347 V-600 V] (factory installed)
ARWFBB	back box

* Add W for white, SW for silica white or BK for black
* Supplied with a white knob (with a white grille), a silica white knob (with a silica white grille) and a black knob (with any other color grille)

COLORS
- standard: white, silica white
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan - 40 CFM (500 W to 1000 W models) - 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset
- dual wattage (DW) in some models (see "DW" in technical specifications table)

ELEMENT
nichrome element produces instant heat

CONTROL
- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION
- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN SINGLE POLE THERMOSTAT	BUILT-IN DOUBLE POLE THERMOSTAT	POWER		VOLTAGE	FLOW	WEIGHT
CODE	CODE	CODE	WATTS	BTU/H	VOLTS	CFM	LB
ARWF1001	**ARWF1001T**	**ARWF1001T2**	1000/500 (DW)	3413	120	40	6
ARWF1008	**ARWF1008T**	**ARWF1008T2**	1000/500 (DW)	3413	208	40	6
ARWF1002	**ARWF1002T**	**ARWF1002T2**	1000/500 (DW)	3413	240	40	6
ARWF1007	**ARWF1007T**	**ARWF1007T2**	1000	3413	277	40	6
ARWF1501	**ARWF1501T**	**ARWF1501T2**	1500/750 (DW)	5119	120	75	6
ARWF1508	**ARWF1508T**	**ARWF1508T2**	1500/750 (DW)	5119	208	75	6
ARWF1502	**ARWF1502T**	**ARWF1502T2**	1500/750 (DW)	5119	240	75	6
ARWF1507	**ARWF1507T**	**ARWF1507T2**	1500	5119	277	75	6
ARWF2008	**ARWF2008T**	**ARWF2008T2**	2000/1000 (DW)	6825	208	75	6
ARWF2002	**ARWF2002T**	**ARWF2002T2**	2000/1000 (DW)	6825	240	75	6
ARWF2007	**ARWF2007T**	**ARWF2007T2**	2000	6825	277	75	6

Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Add WBB for the model without back box
(DW) - dual wattage

TECHNICAL DRAWINGS



TOP

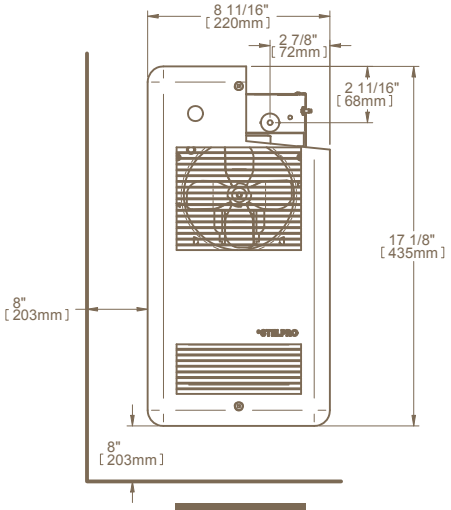

FRONT

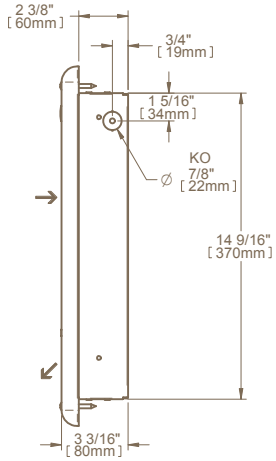

SIDE

4 INSTALLATION OPTIONS

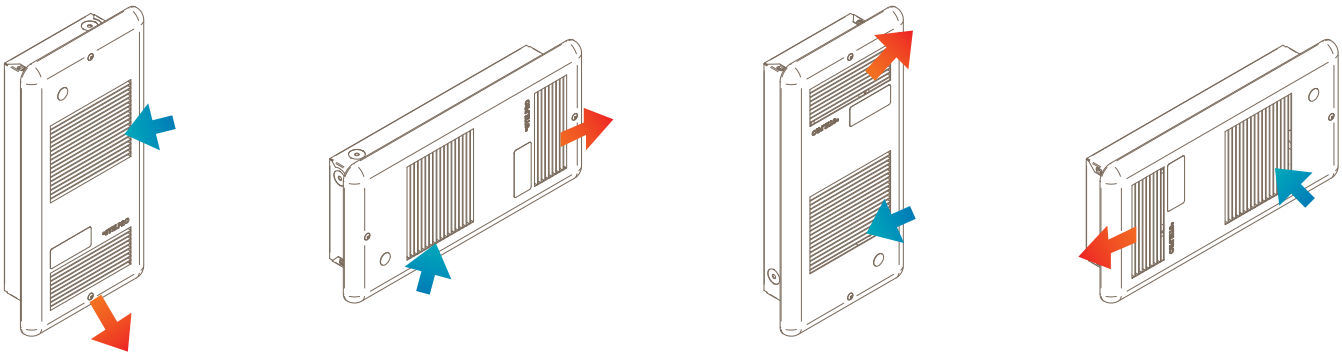

KICK SPACE HEATER

ASKS SERIES

HIDE 'N HEAT

"Hide 'n heat" is what the ASKS kick space heater by °STELPRO offers. Its redesigned and sleek grille is slimmer than ever, allowing easy installation in narrow spaces like under the kitchen or bathroom cabinets and even into stair risers. Enjoy comfortable forced-air heating from the most discreet fan heater on the market.

ALSO AVAILABLE IN BLACK, SILICA WHITE AND WHITE

5 YEAR* WARRANTY

POWER SELECTOR SWITCH
500 W OR 1000 W

EASY INSTALLATION

AESTHETIC GRILLE
SINGLE PIECE, FRAMELESS

IDEAL FOR:
UNDER KITCHEN OR BATHROOM CABINETS, IN STAIR RISERS

ACCESSORIES

PRODUCT	DESCRIPTION
SKST1	built-in single pole thermostat
SKST2	built-in tamper-proof double pole thermostat
SKSR*	extended grille (23 5/8 in. x 3 3/4 in.) allows to cover gaps or imperfections for a renovation project
SKSRSS	extended stainless steel grille (23 5/8 in. x 3 3/4 in.) allows to cover gaps or imperfections for a renovation project

* Add W for white, SW for silica white or BK for black

COLORS
- standard: white, silica white, black
- luxurious finish: stainless steel (surcharge)
- optional: almond, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
- 22-gauge steel cabinet and 16-gauge steel front
- quiet, 50 CFM capacity
- thermal protection with automatic reset
- added protection provided by a fuse-link (must be replaced once activated)

WATTAGE & VOLTAGE
power selector switch (500 W or 1000 W)

ELEMENT
tubular element sheathed with spiral-wound fins for improved heat dissipation

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in thermostat (optional)

INSTALLATION
recessed

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	THROW DISTANCE	HEAT RISE	WEIGHT
CODE	WATTS	BTU/H	VOLTS	FT.	°F	LB
ASKS1001	500 OR 1000	1706 OR 3413	120	4 (in front)	99	10
ASKS1002	500 OR 1000	1706 OR 3413	240	4 (in front)	99	10

Add W for white, SW for silica white, BK for black or SS for stainless steel (see page 10 for optional colors and contact your °STELPRO representative for all other colors)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.** For all the latest models and prices, please refer to our website at www.stelpro.com. * Three years on electronic components.

TECHNICAL DRAWINGS

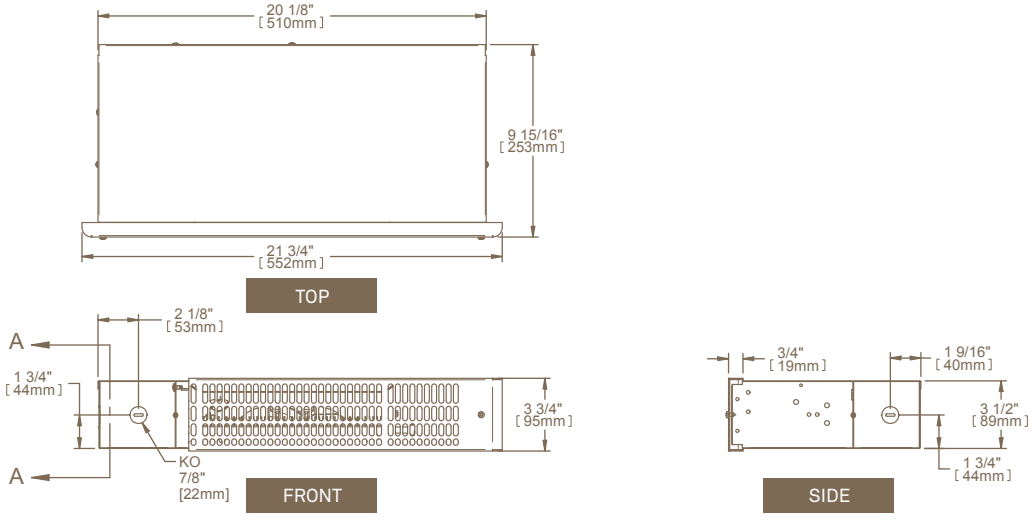

CEILING FAN HEATER

ASK SERIES

AIR CURTAIN™

HEATED FROM ABOVE, SOOTHING BELOW

The AIR CURTAIN™ ceiling fan heater silently beams down heat from above. This unique model is ideal for rooms where wall space is limited. In bathrooms, the AIR CURTAIN™ can be installed just outside the shower or bathtub. With its ceiling-recessed casing, the AIR CURTAIN™ is an excellent way to provide discreet air circulation. The result: uniform heating and air movement, and reduction in mirror and window fog. By adding a wall timer, you can use it on demand.

5 YEAR WARRANTY

CEILING MOUNTED
IDEAL FOR ROOMS WITH LIMITED WALL SPACE

HEATING ON DEMAND
WALL TIMER (OPTIONAL)

COMPACT AND QUIET

IDEAL FOR:
BATHROOMS, ENTRYWAYS, CHILD DAY CARE CENTERS, ROOMS WITH LIMITED WALL SPACE

ACCESSORIES

PRODUCT	DESCRIPTION
SKT1*	tamper-proof built-in thermostat [120 V-347 V] (grille must be removed to access this type of thermostat)
SKTBA*	adapter for suspended ceiling (2 ft. x 2 ft.) - recessed or surface mounted with surface adapter (not included)
SKSA*	surface adapter (ASK model)
SKSAII*	surface adapter (ASKII model)
SKDIS277*	disconnect switch [120 V-277 V]
SKDIS600*	disconnect switch [347 V-600 V]
FD60MCW70	60-minute wall timer [120 V-277 V]

* Add W for white or SW for silica white
* Factory installed

COLORS
- standard: white, silica white
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 22-gauge steel cabinet and 20-gauge steel grille
- 1/4 in. deep front grille
- easy access for maintenance purposes (no screws)

THERMAL PROTECTION
thermal protection with automatic reset

ELEMENT
nichrome element produces instant heat

CONTROL
- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- 60-minute timer (optional)

INSTALLATION
- ceiling mounted (recommended height of 8 ft., maximum of 9 ft.)
- surface mounted with surface adapter (optional)
- recessed or surface mounted with adapter for suspended ceiling (optional)
- unit can be mounted parallel or perpendicular to ceiling beams
- approved to be recessed in mineral wool; for all other materials please verify with the manufacturer of the insulating product

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	PHASE	FLOW	THROW DISTANCE	HEAT RISE	WEIGHT
CODE	WATTS	BTU/H	VOLTS	NB	CFM	FT.	°F	LB
ASK0501	500	1706	120	1	60	8	46	11
ASK0508	500	1706	208	1	60	8	46	11
ASK0502	500/375	1706	240/208	1	60	8	46	11
ASKII0507	500	1706	277	1	60	8	46	11
ASK0751	750	2560	120	1	60	8	75	11
ASK0758	750	2560	208	1	60	8	75	11
ASK0752	750/560	2560	240/208	1	60	8	75	11
ASKII0757	750	2560	277	1	60	8	75	11
ASK1001	1000	3413	120	1	60	8	97	11
ASK1008	1000	3413	208	1	60	8	97	11
ASK1002	1000/750	3413	240/208	1	60	8	97	11
ASKII1007	1000	3413	277	1	60	8	97	11
ASK1251	1250	4266	120	1	60	8	143	11
ASK1258	1250	4266	208	1	60	8	143	11
ASK1252	1250/940	4266	240/208	1	60	8	143	11
ASKII1257	1250	4266	277	1	60	8	143	11
ASK1501	1500	5119	120	1	60	8	184	11
ASK1508	1500	5119	208	1	60	8	184	11
ASK1502	1500/1125	5119	240/208	1	60	8	184	11
ASKII1507	1500	5119	277	1	60	8	184	11
---	2000	6825	120	1	90	10'6"	196	11
---	2000	6825	208	1	90	10'6"	196	11
ASK2002	2000/1500	6825	240/208	1	90	10'6"	196	11
ASKII2007	2000	6825	277	1	90	10'6"	196	11

Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

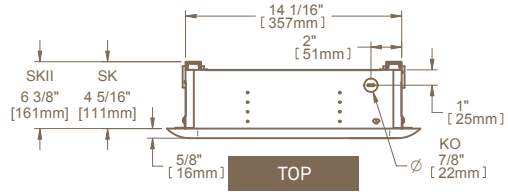

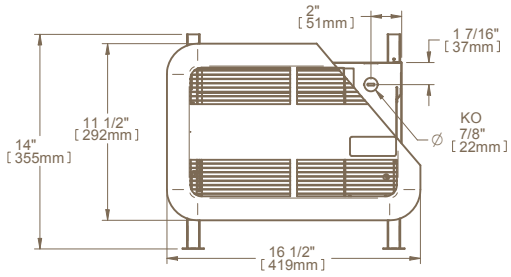



COVE HEATER

SCR SERIES

RADIANCE™

INNOVATION AT THE HEIGHT OF YOUR EXPECTATIONS

The RADIANCE™ cove heater is one of the most efficient heating systems available today. Mounted near the ceiling, the RADIANCE™ directs heat downward across the room, without being blocked by furniture and other objects. Radiant heat warms people directly, creating comfortable conditions similar to that of the sun. It also radiates on all inanimate objects in its path; these objects absorb the heat and in turn act as a "heat reserve", initiating a convection-type flow of heated air that further adds to the maintenance of a desired room temperature.

5 YEAR WARRANTY

15% GREATER ENERGY PERFORMANCE COMPARED TO OTHER RADIANT HEATERS

WALL MOUNTED 2.5 IN. FROM THE CEILING
OUT OF REACH OF CHILDREN AND FREES UP SPACE FOR FURNITURE AND WALL DECORATIONS

NO FORCED-AIR MOVEMENT OR COMBUSTION
IDEAL FOR PEOPLE SUFFERING FROM ALLERGIES

COMPACT, LIGHTWEIGHT AND EASY TO INSTALL
IDEAL FOR BOTH NEW CONSTRUCTION AND RETROFIT

INSTANTANEOUS HEAT

ACCESSORIES

PRODUCT	DESCRIPTION
SCRSPW	splice plate kit (for installing two units side by side)
SCRBTRW*	single pole bimetal thermostat with right side end cover
SCRBTLW*	single pole bimetal thermostat with left side end cover

* Factory installed

IDEAL FOR:

MAIN HEAT SOURCE FOR ANY ROOM, ABOVE WINDOWS OR PATIO DOORS, LIVING ROOMS, BEDROOMS, KITCHENS, DINING ROOMS, CHILD DAY CARE CENTERS, SCHOOLS, PLAY ROOMS, LOCKER ROOMS, SPAS

COLOR

matte off-white

FINISH

- front panel: high temperature, high emissivity paint coating for maximum thermal efficiency
- other parts: hybrid epoxy-polyester powder paint

MANUFACTURING

- aluminum front panel
- 18-gauge steel cabinet and back box
- aluminum end covers
- 24-gauge stainless steel reflector
- full-length wireway
- designed and assembled for reduced noise from the expansion and contraction of metal during heating cycles

ELEMENT

tubular; stainless steel

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in single pole bimetal thermostat installed in the left or right junction box (optional)

INSTALLATION

- wall mounted at a distance of 2.5 in. or more from the ceiling
- all flammable material must be 6 in. or more from the front of the unit

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	VOLTS	IN.	LB
SCR0451W	450	1536	120	34	6.4
SCR0458W	450	1536	208*	34	6.4
SCR0452W	450/338	1536	240/208	34	6.4
SCR0457W	450	1536	277*	34	6.4
SCR0601W	600	2048	120	47	8.9
SCR0608W	600	2048	208*	47	8.9
SCR0602W	600/450	2048	240/208	47	8.9
SCR0607W	600	2048	277*	47	8.9
SCR0751W	750	2560	120	59	11.1
SCR0758W	750	2560	208*	59	11.1
SCR0752W	750/563	2560	240/208	59	11.1
SCR0757W	750	2560	277*	59	11.1
SCR0755W	750	2560	480*	59	11.1
SCR0901W	900	3071	120	71	13.0
SCR0908W	900	3071	208*	71	13.0
SCR0902W	900/675	3071	240/208	71	13.0
SCR0907W	900	3071	277*	71	13.0
SCR0905W	900	3071	480*	71	13.0
SCR1051W	1050	3583	120	83	15.7
SCR1058W	1050	3583	208*	83	15.7
SCR1052W	1050/788	3583	240/208	83	15.7
SCR1057W	1050	3583	277*	83	15.7
SCR1055W	1050	3583	480*	83	15.7
SCR1201W	1200	4095	120	94	17.8
SCR1208W	1200	4095	208*	94	17.8
SCR1202W	1200/900	4095	240/208	94	17.8
SCR1207W	1200	4095	277*	94	17.8
SCR1205W	1200	4095	480*	94	17.8
SCR1508W	1500	5119	208*	106	20.1
SCR1502W	1500/1125	5119	240/208	106	20.1
SCR1507W	1500	5119	277*	106	20.1
SCR1505W	1500	5119	480*	106	20.1

* 208, 277 or 480 voltage are available on demand only

TECHNICAL DRAWINGS

TOP

FRONT



SIDE

HEATING CABLE

TWISTED PAIR - CT SERIES

WARM FEET, OVERALL COMFORT

There is no greater sensation than having warm feet on a heated floor during the cold months of winter – just what °STELPRO CT heating cable provides. It can be installed under a variety of floor coverings and it has virtually no electromagnetic field. Its small diameter allows easy handling while minimizing the overall floor thickness once the floor covering is in place. It's ideal for any part of the house, including the hallway, bathroom, kitchen and basement. It's also great for child day care centers. Whether in one room or the entire house, it provides the warmth of even heat over the entire floor covering surface. Efficiency and safety combined!

NO RETURN TO THERMOSTAT

VIRTUALLY NO ELECTROMAGNETIC FIELD

COMPLETE KIT INCLUDES CABLE, MOUNTING BRACKETS, HOT GLUE AND FLOOR SENSOR

FLEXIBLE, EASY TO HANDLE CABLE

WIDE VARIETY OF LENGTHS

IDEAL FOR:

BATHROOMS, KITCHENS, LIVING ROOMS, BASEMENTS, BEDROOMS, HALLWAYS, CHILD DAY CARE CENTERS, LOCKER ROOMS, SMALL SPACES

MANUFACTURING

- heating element covered with thermoplastic polymer
- return conductor covered with thermoplastic polymer
- small and highly flexible
- ultra-durable thermoplastic compound sheath

WATTAGE

- 9 W/sq.ft. (4 in. spacing)
- 12 W/sq.ft. (3 in. spacing)

CONTROL

electronic thermostat for heating cable (optional, floor sensor included with thermostat)

INSTALLATION

- cement slab or plywood subflooring
- plastic snap gauges (included)
- can be installed under most types of floor coverings* (ceramic tiles, slate, marble, granite, floating floors, laminates, vinyl tiles, linoleum, carpet, etc.)

* For more information about the types of floor coverings under which you can safely install a heating cable, we strongly recommend that you contact a floor covering manufacturer.

ACCESSORIES

PRODUCT	DESCRIPTION
STCNPW5	single programming electronic thermostat
STCPW5	multiple programming electronic thermostat
TH115F12VDC	master thermostat for use with relay (120 V/240 V) in large areas [12 V]
CT230GB	relay for use with master thermostat in large areas [15 A @ 120 V-240 V, 50/60 Hz]
STSCC	thermostat sensor for heating cable
CTSTRP1	plastic mounting brackets (pack of 24 X 1 ft. – included)
CTRK	repair kit

FOR MAXIMUM EFFICIENCY

ELECTRONIC THERMOSTATS FOR HEATING CABLE

MORE DETAILS ON PAGES 88-89

SINGLE PROGRAMMING

MULTIPLE PROGRAMMING

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	VOLTAGE	3 IN. SPACING	4 IN. SPACING	LENGTH	POWER		AMPERAGE
240 VOLTS							
CODE	VOLTS	SQ.FT.	SQ.FT.	FT.	WATTS	BTU/H	AMPERES
CT2W0120S012	240	12	16	40	120	410	0.5
CT2W0180S018	240	18	23	60	180	614	0.75
CT2W0240S023	240	23	30	80	240	819	1.0
CT2W0360S033	240	33	44	120	360	1229	1.5
CT2W0480S044	240	44	58	160	480	1638	2.0
CT2W0600S054	240	54	72	200	600	2048	2.5
CT2W0720S065	240	65	85	240	720	2457	3.0
CT2W0840S075	240	75	99	280	840	2867	3.5
CT2W0960S085	240	85	113	320	960	3276	4.0
CT2W1140S101	240	101	133	380	1140	3890	4.8
CT2W1440S127	240	127	169	480	1440	4914	6.0
CT2W1620S142	240	142	189	540	1620	5529	6.8
CT2W1860S163	240	163	216	620	1860	6348	7.8
CT2W2040S178	240	178	237	680	2040	6962	8.5
CT2W2280S199	240	199	264	760	2280	7781	9.5
CT2W2520S220	240	220	291	840	2520	8600	10.5
CT2W3000S260	240	260	345	1 000	3000	10238	12.5
120 VOLTS							
CODE	VOLTS	SQ.FT.	SQ.FT.	FT.	WATTS	BTU/H	AMPERES
CT1W0120S012	120	12	16	40	120	410	1.0
CT1W0180S018	120	18	23	60	180	614	1.5
CT1W0240S023	120	23	30	80	240	819	2.0
CT1W0360S033	120	33	44	120	360	1229	3.0
CT1W0480S044	120	44	58	160	480	1638	4.0
CT1W0570S052	120	52	69	190	570	1945	4.8
CT1W0720S065	120	65	85	240	720	2457	6.0
CT1W0810S072	120	72	96	270	810	2764	6.8
CT1W0930S083	120	83	109	310	930	3174	7.8
CT1W1020S091	120	91	120	340	1020	3481	8.5
CT1W1140S101	120	101	133	380	1140	3890	9.5
CT1W1260S111	120	111	148	420	1260	4300	10.5
CT1W1500S132	120	132	175	500	1500	5119	12.5

INSTALLATION

UNIVERSAL GAUGE INSTALLATION (included)

HEATING CABLE INSTALLATION

SELF LEVELLING MORTAR APPLICATION

THINSET MORTAR APPLICATION

FLOOR COVERING INSTALLATION

SPACING IN INCHES (UNIVERSAL)

FOR PRIMARY HEATING
12 W/sq.ft.



FOR COMFORT HEATING (FLOOR)
9 W/sq.ft.

THERMOPLASTIC COMPOUND | BRAIDED GROUND | TWISTED PAIR | ELEMENT

HEATING CABLE MAT

SFM SERIES

PERSIA™

A HEATED FLOOR THAT GIVES YOU THE COMFORT OF WARM SAND

°STELPRO's new and innovative heating cable mat adds comfort and a touch of luxury to your home. The PERSIA™ mat has a host of advantages making it the ideal floor heating system for you: silent, efficient and unobtrusive. It can be installed with most types of floor coverings and a wide range of sizes are available. Furthermore, the electromagnetic fields are almost non-existent with the PERSIA™ heating cable mat, meaning it is safe for your crawling toddlers and the rest of your family. Unique to °STELPRO, the membrane is made from a durable, non-woven fabric, making it easy to install and at the same time protecting the cable from damage from tools during installation. This makes PERSIA™ incomparable to other heating mats on the market.

25 YEAR WARRANTY

QUICK, SAFE AND EASY INSTALLATION

HEATING FROM THE GROUND UP, PROVIDING OPTIMAL COMFORT

PERFECT FOR PEOPLE SUFFERING FROM ALLERGIES: NO AIR MOVEMENT, NO DUST AND NO SMELL

WIDE RANGE OF SIZES AVAILABLE

IDEAL FOR:

BATHROOMS, KITCHENS, LIVING ROOMS, BEDROOMS, BASEMENTS, HALLWAYS, CHILD DAY CARE CENTERS, LOCKER ROOMS, SMALL SPACES

ACCESSORIES

PRODUCT	DESCRIPTION
STCNPW5	single programming electronic thermostat
STCPW5	multiple programming electronic thermostat
TH115F12VDC	master thermostat for use with relay (120 V/240 V) in large areas [12 V]
CT230GB	relay for use with master thermostat in large areas [15 A @ 120 V-240 V, 50/60 Hz]
STSCC	thermostat sensor for heating cable
SFMRK	repair kit

FOR MAXIMUM EFFICIENCY

ELECTRONIC THERMOSTATS FOR HEATING CABLE

MORE DETAILS ON PAGES 88-89

SINGLE PROGRAMMING

MULTIPLE PROGRAMMING

MANUFACTURING

- twin heating cables made from high quality thermoplastic polymers, covered and laminated on both sides with a durable non-woven fabric
- meets the following standards: CAN/CSA-C22.2 No. 130-03 for usage markings G, X and W; UL 1673; ANSI/IEEE 515.1 for type C
- very thin (less than 1/8 in. thickness)
- standard length of 10 feet for the power lead wires (other lengths available under special orders)

WATTAGE

- 9 W/sq.ft. (at 208 V)
- 12 W/sq.ft. (at 120 V or 240 V)

CONTROL

- electronic thermostat for heating cable (optional, floor sensor included with thermostat)
- the branch circuit must be equipped with a circuit breaker having a current rating of no more than 15 amps; also, if more than one mat is used, the total current must not surpass 12 amps because the circuit breaker or fuse is limited to a maximum of 15 amps

INSTALLATION

- can be installed on either side, in any direction
- concrete slab or plywood subflooring
- compatible with all types of mortar, adhesive mortar, polymer-modified mortar (thinset) and self-levelling mortar usually used for floor coverings (see the installation guide)
- can be installed under most types of floor coverings* (ceramic tiles, slate, marble, granite, floating floors, laminates, vinyl tiles, linoleum, carpet, etc.)

* For more information about the types of floor coverings under which you can safely install a heating cable mat, we strongly recommend that you contact a floor covering manufacturer.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	DIMENSIONS (IN.)		SURFACE AREA	POWER (WATTS)		POWER (BTU/H)	AMPERAGE (AMPERES)		WEIGHT*
240/208 VOLTS									
CODE	LENGTH	WIDTH	SQ.FT.	240 V	208 V		240 V	208 V	LB
SFM2W0147D042042	42	42	12.3	147	110	502	0.6	0.5	7.3
SFM2W0144D048036	48	36	12.0	144	108	491	0.6	0.5	6.8
SFM2W0168D048042	48	42	14.0	168	126	573	0.7	0.6	7.3
SFM2W0192D048048	48	48	16.0	192	144	655	0.8	0.7	9
SFM2W0150D060030	60	30	12.5	150	113	512	0.6	0.5	6.4
SFM2W0180D060036	60	36	15.0	180	135	614	0.8	0.7	7.5
SFM2W0210D060042	60	42	17.5	210	158	717	0.9	0.8	8.6
SFM2W0240D060048	60	48	20.0	240	180	819	1.0	0.9	10.1
SFM2W0300D060060	60	60	25.0	300	225	1024	1.3	1.1	11.2
SFM2W0180D072030	72	30	15.0	180	135	614	0.8	0.7	7.1
SFM2W0216D072036	72	36	18.0	216	162	737	0.9	0.8	8.2
SFM2W0252D072042	72	42	21.0	252	189	860	1.1	0.9	9.7
SFM2W0288D072048	72	48	24.0	288	216	983	1.2	1.0	9.9
SFM2W0360D072060	72	60	30.0	360	270	1229	1.5	1.3	12.3
SFM2W0432D072072	72	72	36.0	432	324	1474	1.8	1.6	16.1
SFM2W0168D084024	84	24	14.0	168	126	573	0.7	0.6	6.2
SFM2W0210D084030	84	30	17.5	210	158	717	0.9	0.8	7.7
SFM2W0252D084036	84	36	21.0	252	189	860	1.1	0.9	8.6
SFM2W0294D084042	84	42	24.5	294	221	1003	1.2	1.1	10.4
SFM2W0336D084048	84	48	28.0	336	252	1147	1.4	1.2	11.7
SFM2W0420D084060	84	60	35.0	420	315	1433	1.8	1.5	13.4
SFM2W0504D084072	84	72	42.0	504	379	1720	2.1	1.8	15.7
SFM2W0588D084084	84	84	49.0	588	442	2007	2.5	2.1	16.8
SFM2W0192D096024	96	24	16.0	192	144	655	0.8	0.7	6.6
SFM2W0240D096030	96	30	20.0	240	180	819	1.0	0.9	8.2
SFM2W0288D096036	96	36	24.0	288	216	983	1.2	1.0	9
SFM2W0336D096042	96	42	28.0	336	252	1147	1.4	1.2	11.5
SFM2W0384D096048	96	48	32.0	384	288	1310	1.6	1.4	11.7
SFM2W0480D096060	96	60	40.0	480	361	1638	2.0	1.7	15
SFM2W0576D096072	96	72	48.0	576	433	1966	2.4	2.1	18.1
SFM2W0672D096084	96	84	56.0	672	505	2293	2.8	2.4	19.8
SFM2W0768D096096	96	96	64.0	768	577	2621	3.2	2.8	19.6
SFM2W0240D120024	120	24	20.0	240	180	819	1.0	0.9	7.9
SFM2W0300D120030	120	30	25.0	300	225	1024	1.3	1.1	9.7
SFM2W0360D120036	120	36	30.0	360	270	1229	1.5	1.3	11
SFM2W0420D120042	120	42	35.0	420	315	1433	1.8	1.5	12.6
SFM2W0480D120048	120	48	40.0	480	361	1638	2.0	1.7	14.3
SFM2W0600D120060	120	60	50.0	600	451	2048	2.5	2.2	17.2
SFM2W0720D120072	120	72	60.0	720	541	2457	3.0	2.6	20.9
SFM2W0840D120084	120	84	70.0	840	631	2867	3.5	3.0	21.8
SFM2W0960D120096	120	96	80.0	960	721	3276	4.0	3.5	24.9
SFM2W1200D120120	120	120	100.0	1200	901	4095	5.0	4.3	30.4
SFM2W0432D144036	144	36	36.0	432	324	1474	1.8	1.6	11.1
SFM2W0720D144060	144	60	60.0	720	541	2457	3.0	2.6	20.1
SFM2W0864D144072	144	72	72.0	864	649	2949	3.6	3.1	22.9
SFM2W1152D144096	144	96	96.0	1152	865	3931	4.8	4.2	29.8
SFM2W1440D144120	144	120	120.0	1440	1082	4914	6.0	5.2	35.3
SFM2W1728D144144	144	144	144.0	1728	1298	5897	7.2	6.2	40.3

* With packaging

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	DIMENSIONS (IN.)		SURFACE AREA	POWER		AMPERAGE	WEIGHT*
120 VOLTS							
CODE	LENGTH	WIDTH	SQ.FT.	WATTS	BTU/H	AMPERES	LB
SFM1W0095D042027	42	27	7.9	95	324	0.8	2.8
SFM1W0112D042032	42	32	9.3	112	382	0.9	2.9
SFM1W0147D042042	42	42	12.3	147	502	1.2	3.1
SFM1W0096D048024	48	24	8.0	96	328	0.8	3.1
SFM1W0120D048030	48	30	10.0	120	410	1.0	3.1
SFM1W0144D048036	48	36	12.0	144	491	1.2	3.1
SFM1W0168D048042	48	42	14.0	168	573	1.4	3.5
SFM1W0192D048048	48	48	16.0	192	655	1.6	4.0
SFM1W0120D060024	60	24	10.0	120	410	1.0	2.5
SFM1W0150D060030	60	30	12.5	150	512	1.3	3.0
SFM1W0180D060036	60	36	15.0	180	614	1.5	3.3
SFM1W0210D060042	60	42	17.5	210	717	1.8	3.8
SFM1W0240D060048	60	48	20.0	240	819	2.0	4.3
SFM1W0300D060060	60	60	25.0	300	1024	2.5	5.1
SFM1W0144D072024	72	24	12.0	144	491	1.2	2.6
SFM1W0180D072030	72	30	15.0	180	614	1.5	3.2
SFM1W0216D072036	72	36	18.0	216	737	1.8	3.6
SFM1W0252D072042	72	42	21.0	252	860	2.1	4.1
SFM1W0288D072048	72	48	24.0	288	983	2.4	4.8
SFM1W0360D072060	72	60	30.0	360	1229	3.0	5.7
SFM1W0432D072072	72	72	36.0	432	1474	3.6	7.3
SFM1W0168D084024	84	24	14.0	168	573	1.4	3.0
SFM1W0210D084030	84	30	17.5	210	717	1.8	3.5
SFM1W0252D084036	84	36	21.0	252	860	2.1	3.9
SFM1W0294D084042	84	42	24.5	294	1003	2.5	4.7
SFM1W0336D084048	84	48	28.0	336	1147	2.8	5.5
SFM1W0420D084060	84	60	35.0	420	1433	3.5	6.2
SFM1W0504D084072	84	72	42.0	504	1720	4.2	7.1
SFM1W0588D084084	84	84	49.0	588	2007	4.9	7.7
SFM1W0192D096024	96	24	16.0	192	655	1.6	2.9
SFM1W0240D096030	96	30	20.0	240	819	2.0	3.8
SFM1W0288D096036	96	36	24.0	288	983	2.4	4.5
SFM1W0336D096042	96	42	28.0	336	1147	2.8	5.4
SFM1W0384D096048	96	48	32.0	384	1310	3.2	5.4
SFM1W0480D096060	96	60	40.0	480	1638	4.0	6.8
SFM1W0576D096072	96	72	48.0	576	1966	4.8	8.3
SFM1W0672D096084	96	84	56.0	672	2293	5.6	8.9
SFM1W0768D096096	96	96	64.0	768	2621	6.4	9.0
SFM1W0240D120024	120	24	20.0	240	819	2.0	3.6
SFM1W0300D120030	120	30	25.0	300	1024	2.5	4.3
SFM1W0360D120036	120	36	30.0	360	1229	3.0	5.1
SFM1W0420D120042	120	42	35.0	420	1433	3.5	5.8
SFM1W0480D120048	120	48	40.0	480	1638	4.0	6.6
SFM1W0600D120060	120	60	50.0	600	2048	5.0	7.9
SFM1W0720D120072	120	72	60.0	720	2457	6.0	9.5
SFM1W0840D120084	120	84	70.0	840	2867	7.0	9.8
SFM1W0960D120096	120	96	80.0	960	3276	8.0	11.4

* With packaging

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

WALL FAN HEATER

AWF SERIES

VERSATILITY IS THE NAME OF THE GAME!

The AWF is a high-capacity fan heater that's ideal for building lobbies, long corridors, stairwells, workshops, factories, and warehouses. Its electrical element is made of high-quality nichrome assuring an immediate surge of hot air. The various modes of wall installation make the AWF heater one of the most versatile fan heaters on the market: it can be surface mounted or recessed, with a variety of models and heating capacities to choose from.

IMPROVED

3 YEAR WARRANTY

NEW GRILLE WITH ROUNDED SIDES
DURABLE AND STYLISH

WIDE RANGE OF MODELS & HEATING CAPACITIES
INCLUDING A 4800 W SINGLE MODEL

NICHROME ELEMENT
ASSURING INSTANT HEAT

NEW DISCONNECT SWITCH
OPTIONAL

IDEAL FOR:
LOBBIES, CORRIDORS, FACTORIES, WAREHOUSES, STAIRWELLS

ACCESSORIES

PRODUCT	DESCRIPTION
WFT1	built-in single pole thermostat [120 V-600 V]
WFT2	built-in double pole thermostat [120 V-600 V]
WFSA1*	surface adapter (single unit)
WFSA2*	surface adapter (double unit)
WFSA3*	surface adapter (triple unit)
WFSA1SS	stainless steel surface adapter (single unit)
WFSA2SS	stainless steel surface adapter (double unit)
WFSA3SS	stainless steel surface adapter (triple unit)
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles
WFC24RX*	relay kit without transformer 24 V

* Add W for white or SW for silica white
* Factory installed

COLORS
- standard: white, silica white
- luxurious finish: stainless steel (surcharge)
- optional: black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
- 20-gauge steel cabinet and 18-gauge steel grille
- top air intake with bottom air discharge
- quiet helicoidal fan: single unit 1 x 160 CFM - double unit 2 x 160 CFM - triple unit 3 x 160 CFM
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

ELEMENT
high quality nichrome element producing instant heat

CONTROL
connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION
- wall mounted
- recessed or surface mounted with surface adapter (optional)

ROUNDED SIDES

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	WEIGHT	MODEL
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	LB	UNIT
AWF1508	AWF1508T	AWF1508C	AWF1508C24	1500	5119	208	20	SINGLE
AWF1502	AWF1502T	AWF1502C	AWF1502C24	1500/1125	5119	240/208	20	SINGLE
AWF1507	AWF1507T	AWF1507C	AWF1507C24	1500	5119	277	20	SINGLE
---	AWF1505T	AWF1505C	AWF1505C24	1500	5119	480	20	SINGLE
AWF2008	AWF2008T	AWF2008C	AWF2008C24	2000	6825	208	20	SINGLE
AWF2002	AWF2002T	AWF2002C	AWF2002C24	2000/1500	6825	240/208	20	SINGLE
AWF2007	AWF2007T	AWF2007C	AWF2007C24	2000	6825	277	20	SINGLE
---	AWF2005T	AWF2005C	AWF2005C24	2000	6825	480	20	SINGLE
AWF3008	AWF3008T	AWF3008C	AWF3008C24	3000	10238	208	20	SINGLE
AWF3002	AWF3002T	AWF3002C	AWF3002C24	3000/2250	10238	240/208	20	SINGLE
AWF3007	AWF3007T	AWF3007C	AWF3007C24	3000	10238	277	20	SINGLE
---	AWF3005T	AWF3005C	AWF3005C24	3000	10238	480	20	SINGLE
AWF4008	AWF4008T	AWF4008C	AWF4008C24	4000	13651	208	20	SINGLE
AWF4002	AWF4002T	AWF4002C	AWF4002C24	4000/3000	13651	240/208	20	SINGLE
AWF4007	AWF4007T	AWF4007C	AWF4007C24	4000	13651	277	20	SINGLE
---	AWF4005T	AWF4005C	AWF4005C24	4000	13651	480	20	SINGLE
AWF4808	AWF4808T	AWF4808C	AWF4808C24	4800	16381	208	20	SINGLE
AWF4802	AWF4802T	AWF4802C	AWF4802C24	4800/3600	16381	240/208	20	SINGLE
AWF4807	AWF4807T	AWF4807C	AWF4807C24	4800	16381	277	20	SINGLE
---	AWF4805T	AWF4805C	AWF4805C24	4800	16381	480	20	SINGLE
---	AWF6008CT	AWF6008C	AWF6008C24	6000	20476	208	40	DOUBLE
---	AWF6002T	AWF6002C	AWF6002C24	6000/4500	20476	240/208	40	DOUBLE
---	AWF6007T	AWF6007C	AWF6007C24	6000	20476	277	40	DOUBLE
---	AWF6005T	AWF6005C	AWF6005C24	6000	20476	480	44	DOUBLE
---	AWF60083CT*	AWF60083C*	AWF60083C24*	6000	20476	208	80	TRIPLE
---	AWF60053CT*	AWF60053C*	AWF60053C24*	6000	20476	480	80	TRIPLE
---	AWF8008CT	AWF8008C	AWF8008C24	8000	27302	208	40	DOUBLE
---	AWF8002CT	AWF8002C	AWF8002C24	8000/6000	27302	240/208	40	DOUBLE
---	AWF8007CT	AWF8007C	AWF8007C24	8000	27302	277	40	DOUBLE
---	AWF8005CT	AWF8005C	AWF8005C24	8000	27302	480	44	DOUBLE
---	AWF90083CT*	AWF90083C*	AWF90083C24*	9000	30714	208	80	TRIPLE
---	AWF90053CT*	AWF90053C*	AWF90053C24*	9000	30714	480	80	TRIPLE
---	AWF12008CT	AWF12008C	AWF12008C24	12 000	40952	208	80	TRIPLE
---	AWF12002CT	AWF12002C	AWF12002C24	12 000/9000	40952	240/208	80	TRIPLE
---	AWF12007CT	AWF12007C	AWF12007C24	12 000	40952	277	80	TRIPLE
---	AWF12005CT	AWF12005C	AWF12005C24	12 000	40952	480	80	TRIPLE
---	AWF120083CT*	AWF120083C*	AWF120083C24*	12 000	40952	208	80	TRIPLE
---	AWF120053CT*	AWF120053C*	AWF120053C24*	12 000	40952	480	80	TRIPLE

Add W for white, SW for silica white or SS for stainless steel (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
* Three-phase unit
--- not available

THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE	HEAT RISE
KW	FT.	°F
1.5	13'7"	53
2	13'7"	75
3	13'7"	110
4	13'7"	133
4.8	13'7"	167
6	13'7"	110
8	13'7"	133
9	13'7"	110
12	13'7"	133

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL DRAWINGS

SINGLE UNIT

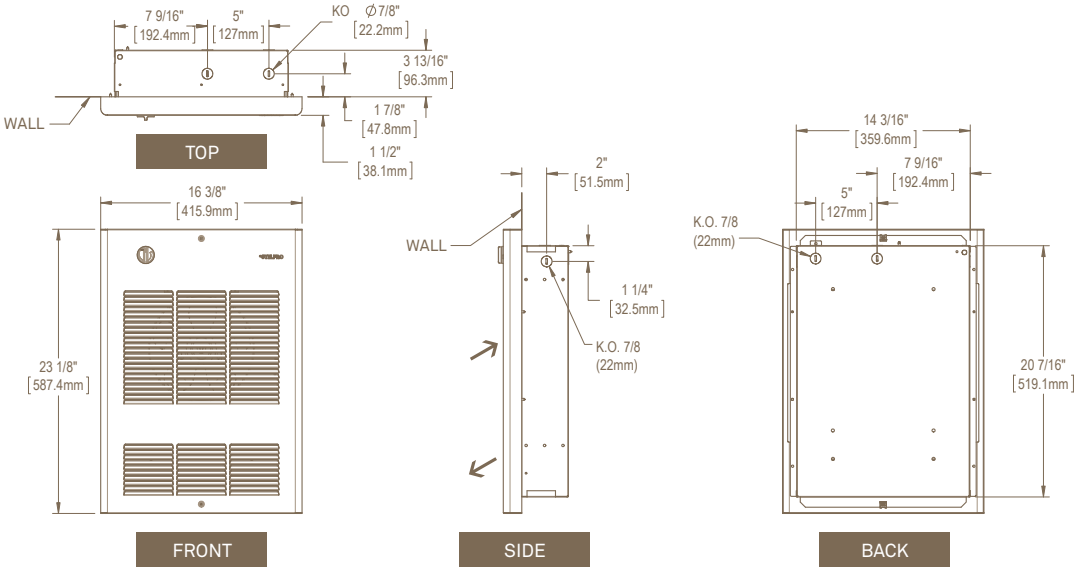

DOUBLE UNIT

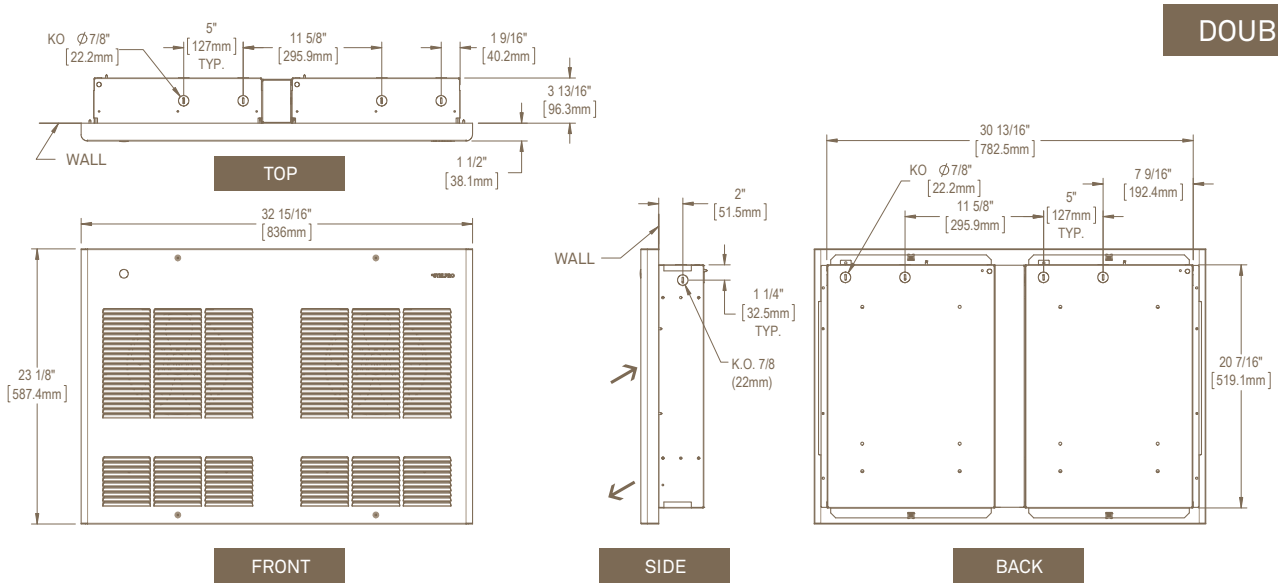

TRIPLE UNIT

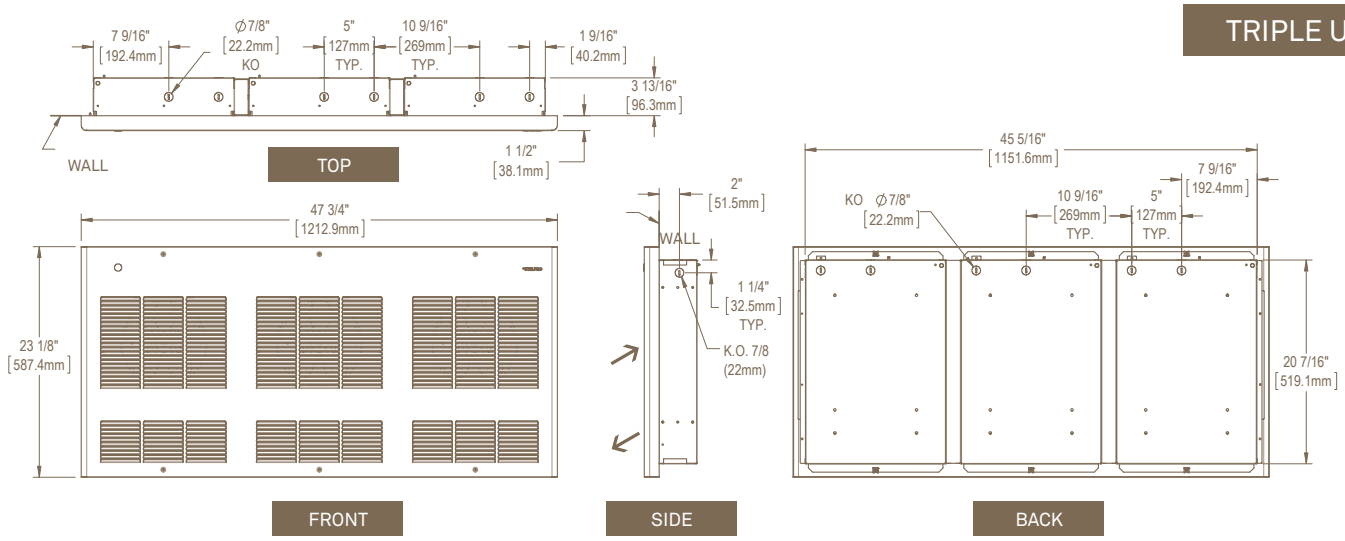

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

WALL FAN HEATER

ALUMINUM - AWFA SERIES

ALUX™ SERIES | SÉRIE

WHEN DURABILITY AND PERFORMANCE MEET DESIGN

In need of a solid, stylish heater to warm your clients in the lobby or entrance of your business? The ALUX™ series wall fan heater (AWFA) with its remarkable rush of warm air is the solution. It has an aluminum extrusion grille that is striking, modern and unbelievably resistant. Imagine no more dents or rust! The AWFA can be installed recessed or surface mounted on the wall and is available in a large array of wattages to meet all your needs.

NEW PRODUCT

3 YEAR WARRANTY

EXTRUDED ALUMINUM PROFILE WITH A UNIQUE AND LUXURIOUS DESIGN

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

WIDE RANGE OF MODELS AND HEATING CAPACITIES
INCLUDING A SINGLE UNIT OF 4800 W

SIGNATURE NICHROME ELEMENT
OFFERING SUPERIOR PERFORMANCE AND IMMEDIATE HEAT!

IDEAL FOR:
LOBBIES, ENTRANCES, CORRIDORS, FACTORIES, WAREHOUSES, STAIRWELLS

ACCESSORIES

PRODUCT	DESCRIPTION
WFAT1	built-in single pole thermostat [120 V-347 V]
WFAT2	built-in double pole thermostat [120 V-347 V]
WFASA1*	surface adapter (single unit)
WFASA2*	surface adapter (double unit)
WFASA3*	surface adapter (triple unit)
WFADIS-30*	disconnect switch kit 600 V/30 A, 2 poles
WFADIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles
WFADIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles

* Add W for white, SW for silica white, A for almond, BK for black, CHAR for textured charcoal, BR for dark brown or CAP for clear anodized (paint)
* Factory installed

COLORS
white, silica white, almond, black, textured charcoal, dark brown, clear anodized (paint)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 22-gauge steel cabinet
- extruded aluminum grille with a thickness equivalent to 13 gauge
- top air intake with bottom air discharge
- quiet helicoidal fan: single unit 1 x 160 CFM - double unit 2 x 160 CFM - triple unit 3 x 160 CFM
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

ELEMENT
high quality nichrome element producing instant heat

INSTALLATION
- wall mounted
- recessed or surface mounted with surface adapter (optional)

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	WEIGHT	MODEL
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	LB	UNIT
AWFA1508	AWFA1508T	AWFA1508C	AWFA1508C24	1500	5119	208	20	SINGLE
AWFA1502	AWFA1502T	AWFA1502C	AWFA1502C24	1500/1125	5119	240/208	20	SINGLE
AWFA1507	AWFA1507T	AWFA1507C	AWFA1507C24	1500	5119	277	27	SINGLE
---	AWFA1505T	AWFA1505C	AWFA1505C24	1500	5119	480	27	SINGLE
AWFA2008	AWFA2008T	AWFA2008C	AWFA2008C24	2000	6825	208	23	SINGLE
AWFA2002	AWFA2002T	AWFA2002C	AWFA2002C24	2000/1500	6825	240/208	23	SINGLE
AWFA2007	AWFA2007T	AWFA2007C	AWFA2007C24	2000	6825	277	27	SINGLE
---	AWFA2005T	AWFA2005C	AWFA2005C24	2000	6825	480	27	SINGLE
AWFA3008	AWFA3008T	AWFA3008C	AWFA3008C24	3000	10238	208	23	SINGLE
AWFA3002	AWFA3002T	AWFA3002C	AWFA3002C24	3000/2250	10238	240/208	23	SINGLE
AWFA3007	AWFA3007T	AWFA3007C	AWFA3007C24	3000	10238	277	27	SINGLE
---	AWFA3005T	AWFA3005C	AWFA3005C24	3000	10238	480	27	SINGLE
AWFA4008	AWFA4008T	AWFA4008C	AWFA4008C24	4000	13651	208	23	SINGLE
AWFA4002	AWFA4002T	AWFA4002C	AWFA4002C24	4000/3000	13651	240/208	23	SINGLE
AWFA4007	AWFA4007T	AWFA4007C	AWFA4007C24	4000	13651	277	27	SINGLE
---	AWFA4005T	AWFA4005C	AWFA4005C24	4000	13651	480	27	SINGLE
AWFA4808	AWFA4808T	AWFA4808C	AWFA4808C24	4800	16381	208	23	SINGLE
AWFA4802	AWFA4802T	AWFA4802C	AWFA4802C24	4800/3600	16381	240/208	23	SINGLE
AWFA4807	AWFA4807T	AWFA4807C	AWFA4807C24	4800	16381	277	27	SINGLE
---	AWFA4805T	AWFA4805C	AWFA4805C24	4800	16381	480	27	SINGLE
---	AWFA6008CT	AWFA6008C	AWFA6008C24	6000	20476	208	44	DOUBLE
---	AWFA6002T	AWFA6002C	AWFA6002C24	6000/4500	20476	240/208	44	DOUBLE
---	AWFA6007T	AWFA6007C	AWFA6007C24	6000	20476	277	48	DOUBLE
---	AWFA6005T	AWFA6005C	AWFA6005C24	6000	20476	480	48	DOUBLE
---	AWFA60083CT*	AWFA60083C*	AWFA60083C24*	6000	20476	208	80	TRIPLE
---	AWFA60053CT*	AWFA60053C*	AWFA60053C24*	6000	20476	480	80	TRIPLE
---	AWFA8008CT	AWFA8008C	AWFA8008C24	8000	27302	208	44	DOUBLE
---	AWFA8002CT	AWFA8002C	AWFA8002C24	8000/6000	27302	240/208	44	DOUBLE
---	AWFA8007CT	AWFA8007C	AWFA8007C24	8000	27302	277	48	DOUBLE
---	AWFA8005CT	AWFA8005C	AWFA8005C24	8000	27302	480	48	DOUBLE
---	AWFA90083CT*	AWFA90083C*	AWFA90083C24*	9000	30714	208	80	TRIPLE
---	AWFA90053CT*	AWFA90053C*	AWFA90053C24*	9000	30714	480	80	TRIPLE
---	AWFA12008CT	AWFA12008C	AWFA12008C24	12000	40952	208	80	TRIPLE
---	AWFA12002CT	AWFA12002C	AWFA12002C24	12000/9000	40952	240/208	80	TRIPLE
---	AWFA12007CT	AWFA12007C	AWFA12007C24	12000	40952	277	80	TRIPLE
---	AWFA12005CT	AWFA12005C	AWFA12005C24	12000	40952	480	80	TRIPLE
---	AWFA120083CT*	AWFA120083C*	AWFA120083C24*	12000	40952	208	80	TRIPLE
---	AWFA120053CT*	AWFA120053C*	AWFA120053C24*	12000	40952	480	80	TRIPLE

Add W for white, SW for silica white, A for almond, BK for black, CHAR for textured charcoal, BR for dark brown or CAP for clear anodized (paint) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)

* Three-phase unit
--- not available

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL DRAWINGS

SINGLE UNIT

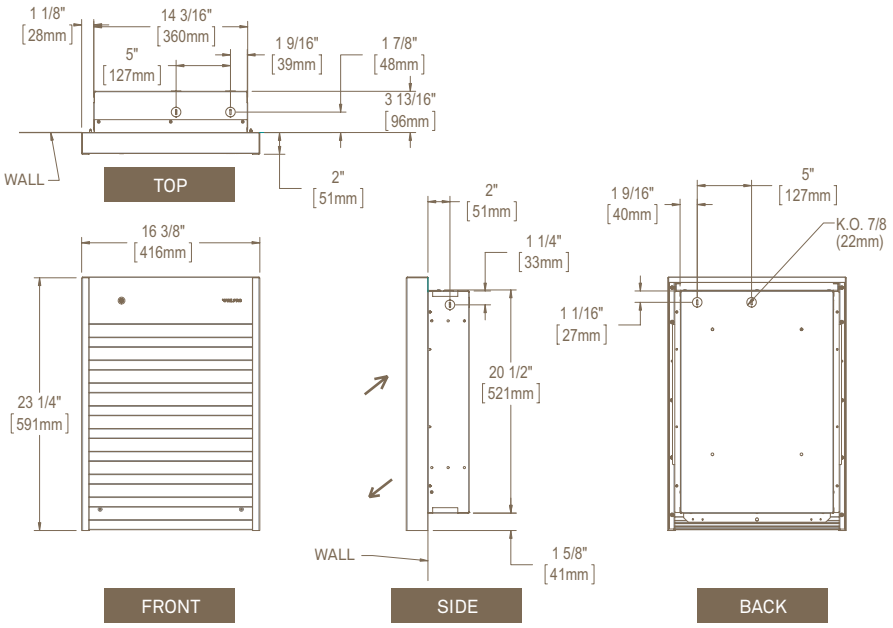

DOUBLE UNIT

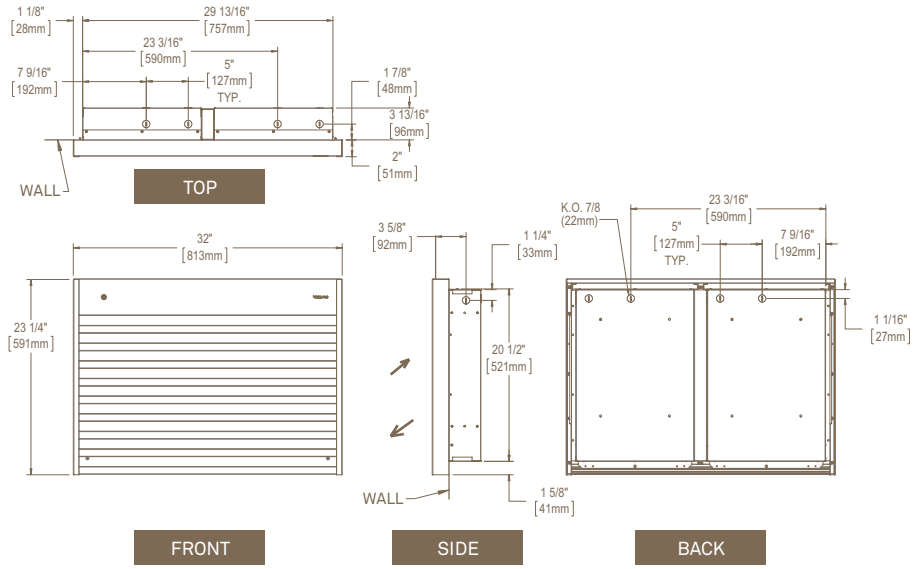

TRIPLE UNIT

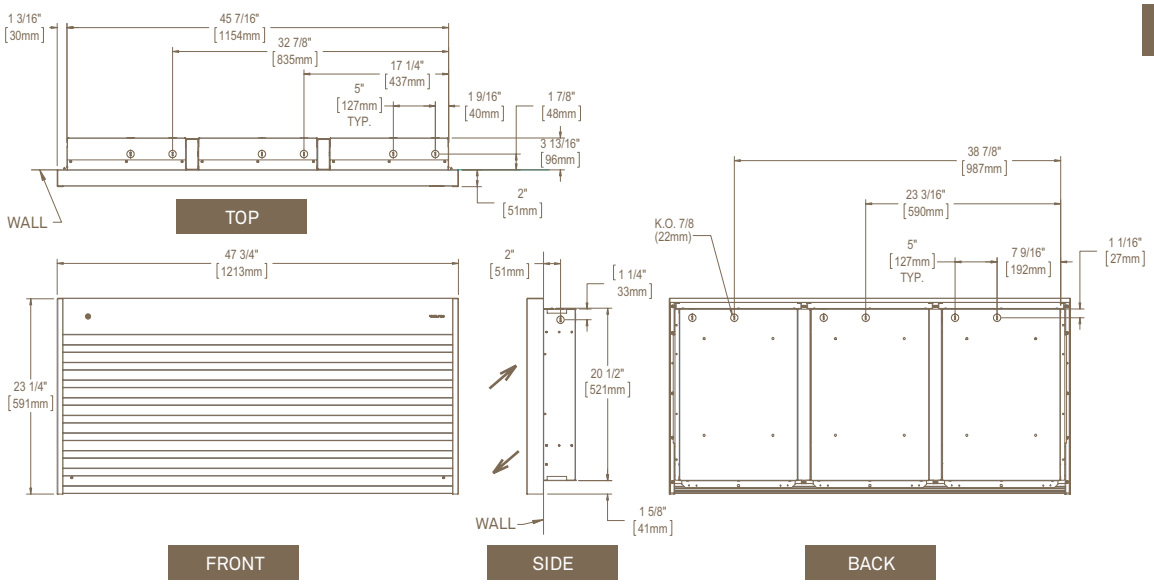

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

CABINET HEATER

ACBH SERIES

POWERFUL HEATER, IMPRESSIVE RESULTS

When you need a lot of high-efficiency heating, the ACBH is the right choice. Its resistant coating is well-suited to all types of commercial spaces and other high-traffic areas. This forced-air cabinet heater features unparallelled durability. It is also extremely versatile, with the option of recessed, semi-recessed or surface mounted installation, and its durable steel casing. The ACBH unit can be ceiling mounted when wall mounting is not an option. The ACBH ensures powerful, even air flow as the fan is coupled directly to the motor. The option of connecting it to a ventilation duct makes it even more adaptable. The ACBH is your assurance of reliable heating for years to come.

3 YEAR WARRANTY

POWERFUL WITH BIG AIRFLOW

MULTIPLE INSTALLATION OPTIONS
RECESSED, SEMI-RECESSED, SURFACE MOUNTED TO THE CEILING OR WALL

DURABLE

IDEAL FOR:
COMMERCIAL AREAS, HOSPITALS, SHOPPING MALLS, SCHOOLS, SPORTS ARENAS

ACCESSORIES

PRODUCT	DESCRIPTION
CBHT1	built-in tamper-proof single pole thermostat
CBHFS*	fan switch
CBHMS*	on/off switch
CBHHL*	high/low switch (available from 4 kW)
CBHDC*	duct collar
CBHTB24*	4-piece trim frame (24 in.units)
CBHTB36*	4-piece trim frame (36 in. units)
CBHTB48*	4-piece trim frame (48 in. units)
CBHSB24*	sub-base (24 in. units)
CBHSB36*	sub-base (36 in. units)
CBHSB48*	sub-base (48 in. units)
CBHCB24**	clean back (fully finished, no mounting holes or knockouts) (24 in. units)
CBHCB36**	clean back (fully finished, no mounting holes or knockouts) (36 in. units)
CBHCB48**	clean back (fully finished, no mounting holes or knockouts) (48 in. units)
CBHC24RX*	relay kit without transformer 24 V
CBHDIS 80A*	built-in disconnect switch [80 A]

* Add W for white or SW for silica white
* Factory installed

COLORS
- standard: white, silica white
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 18-gauge steel cabinet and 16-gauge steel front panel
- powerful motor with squirrel-cage blower and time-delay relay
- 1/15 hp (2 kW to 12 kW units); 1/5 hp (15 kW to 20 kW units)
- large variety of airflow configurations which are adaptable on the construction site
- thermal protection with automatic reset
- high intensity (factory setting)
- low intensity available when manufactured with hi/lo selection switch (optional)

ELEMENT
nichrome element producing instant heat

CONTROL
- high/low switch (heating and ventilation) (available from 4 kW)
- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION
- wall or ceiling mounted
- surface mounted
- recessed or semi-recessed with 4-piece trim frame (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		
CODE	CODE	CODE	VOLTS	KW	BTU/H
24 IN. MODELS (2 KW TO 6 KW) / CFM 300 / 77 LB					
ACBH0281CT	ACBH0281C	ACBH0281C24	208	2	6825
ACBH0283CT*	ACBH0283C*	ACBH0283C24*	208	2	6825
ACBH0221CT	ACBH0221C	ACBH0221C24	240	2	6825
ACBH0271CT	ACBH0271C	ACBH0271C24	277	2	6825
ACBH0251CT	ACBH0251C	ACBH0251C24	480	2	6825
ACBH0253CT*	ACBH0253C*	ACBH0253C24*	480	2	6825
ACBH0381CT	ACBH0381C	ACBH0381C24	208	3	10238
ACBH0383CT*	ACBH0383C*	ACBH0383C24*	208	3	10238
ACBH0321CT	ACBH0321C	ACBH0321C24	240	3	10238
ACBH0371CT	ACBH0371C	ACBH0371C24	277	3	10238
ACBH0351CT	ACBH0351C	ACBH0351C24	480	3	10238
ACBH0353CT*	ACBH0353C*	ACBH0353C24*	480	3	10238
ACBH0481CT	ACBH0481C	ACBH0481C24	208	4	13648
ACBH0483CT*	ACBH0483C*	ACBH0483C24*	208	4	13648
ACBH0421CT	ACBH0421C	ACBH0421C24	240	4	13648
ACBH0471CT	ACBH0471C	ACBH0471C24	277	4	13648
ACBH0451CT	ACBH0451C	ACBH0451C24	480	4	13648
ACBH0453CT*	ACBH0453C*	ACBH0453C24*	480	4	13648
ACBH0581CT	ACBH0581C	ACBH0581C24	208	5	17064
ACBH0583CT*	ACBH0583C*	ACBH0583C24*	208	5	17064
ACBH0521CT	ACBH0521C	ACBH0521C24	240	5	17064
ACBH0571CT	ACBH0571C	ACBH0571C24	277	5	17064
ACBH0551CT	ACBH0551C	ACBH0551C24	480	5	17064
ACBH0553CT*	ACBH0553C*	ACBH0553C24*	480	5	17064
ACBH0681CT	ACBH0681C	ACBH0681C24	208	6	20476
ACBH0683CT*	ACBH0683C*	ACBH0683C24*	208	6	20476
ACBH0621CT	ACBH0621C	ACBH0621C24	240	6	20476
ACBH0671CT	ACBH0671C	ACBH0671C24	277	6	20476
ACBH0651CT	ACBH0651C	ACBH0651C24	480	6	20476
ACBH0653CT*	ACBH0653C*	ACBH0653C24*	480	6	20476

TECHNICAL SPECIFICATIONS (CONT'D)

BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		
CODE	CODE	CODE	VOLTS	KW	BTU/H
36 IN. MODELS (8 KW TO 12 KW) / CFM 600 / 95 LB					
ACBH0881CT	ACBH0881C	ACBH0881C24	208	8	27302
ACBH0883CT*	ACBH0883C*	ACBH0883C24*	208	8	27302
ACBH0821CT	ACBH0821C	ACBH0821C24	240	8	27302
ACBH0871CT	ACBH0871C	ACBH0871C24	277	8	27302
ACBH0851CT	ACBH0851C	ACBH0851C24	480	8	27302
ACBH0853CT*	ACBH0853C*	ACBH0853C24*	480	8	27302
ACBH1081CT	ACBH1081C	ACBH1081C24	208	10	34127
ACBH1083CT*	ACBH1083C*	ACBH1083C24*	208	10	34127
ACBH1021CT	ACBH1021C	ACBH1021C24	240	10	34127
ACBH1071CT	ACBH1071C	ACBH1071C24	277	10	34127
ACBH1051CT	ACBH1051C	ACBH1051C24	480	10	34127
ACBH1053CT*	ACBH1053C*	ACBH1053C24*	480	10	34127
ACBH1283CT*	ACBH1283C*	ACBH1283C24*	208	12	40952
ACBH1221CT	ACBH1221C	ACBH1221C24	240	12	40952
ACBH1271CT	ACBH1271C	ACBH1271C24	277	12	40952
ACBH1253CT*	ACBH1253C*	ACBH1253C24*	480	12	40952
48 IN. MODELS (15 KW TO 20 KW) / CFM 1000 / 112 LB					
ACBH1583CT*	ACBH1583C*	ACBH1583C24*	208	15	51191
ACBH1521CT	ACBH1521C	ACBH1521C24	240	15	51191
ACBH1571CT	ACBH1571C	ACBH1571C24	277	15	51191
ACBH1553CT*	ACBH1553C*	ACBH1553C24*	480	15	51191
ACBH1883CT	ACBH1883C	ACBH1883C24	208	18	61429
ACBH1821CT	ACBH1821C	ACBH1821C24	240	18	61429
ACBH1871CT	ACBH1871C	ACBH1871C24	277	18	61429
ACBH1853CT	ACBH1853C	ACBH1853C24	480	18	61429
ACBH2083CT*	ACBH2083C*	ACBH2083C24*	208	20	68254
ACBH2021CT	ACBH2021C	ACBH2021C24	240	20	68254
ACBH2071CT	ACBH2071C	ACBH2071C24	277	20	68254
ACBH2053CT*	ACBH2053C*	ACBH2053C24*	480	20	68254

Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
* Three-phase unit

TECHNICAL DRAWINGS

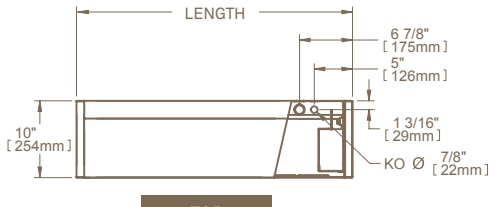

TOP

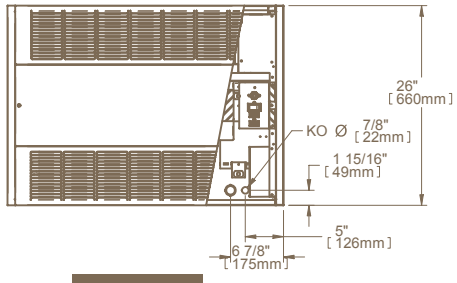

FRONT

INSTALLATION

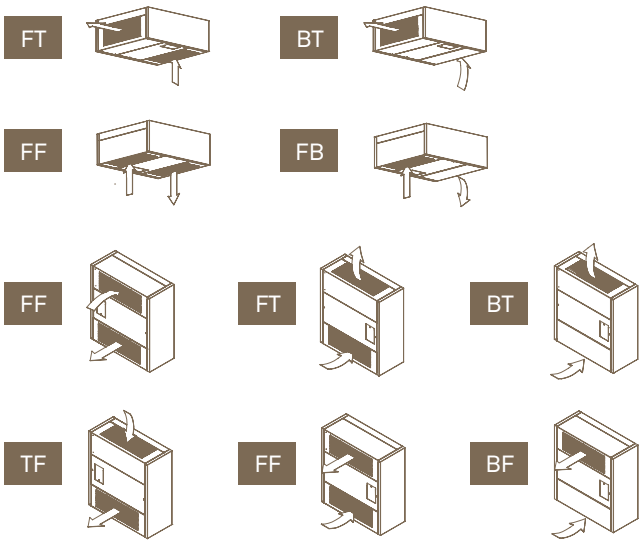

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

CEILING FAN HEATER

ASGH SERIES

SPIDER™

GET CAUGHT UP IN ITS COMFORT!

This stylish ceiling fan heater will be the highlight of your garage! The SPIDER™ ceiling fan heater combines optimum performance, instant heat and a low noise level, all this in a distinctive design with a choice of striking colors.

NEW DESIGN: INCREASED AIR FLOW

A REINVENTION OF GARAGE HEATING
INNOVATIVE AND UNIQUE DESIGN

DESIGNED SPECIFICALLY FOR RESIDENTIAL GARAGES

CEILING INSTALLATION
FREEING UP FLOOR AND WALL SPACE

CHOICE OF STRIKING COLORS

IDEAL FOR:
GARAGES, WORKSHOPS

COLORS
- standard: red, yellow
- luxurious finish: stainless steel (surcharge)

FINISH
polyester powdercoat or stainless steel

MANUFACTURING
- 22-gauge smooth steel housing
- quiet helicoidal fan
- thermal protection with automatic reset
- closed and permanently lubricated motor

ELEMENT
nichrome element producing instant heat

CONTROL
wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION
- ceiling surface mounted with bracket
- from adjacent walls at a minimum of: 12 in.
- from floor at a minimum of 8 ft. and a maximum of 10 ft.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

c UL us LISTED

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	COLOR	HEAT RISE	WEIGHT
CODE	WATTS	BTU/H	VOLTS		°F	LB
ASGH4002R	4000/3000	13 651	240/208	RED	83	10
ASGH4002Y	4000/3000	13 651	240/208	YELLOW	83	10
ASGH4002SS	4000/3000	13 651	240/208	STAINLESS STEEL	83	10

TECHNICAL DRAWINGS

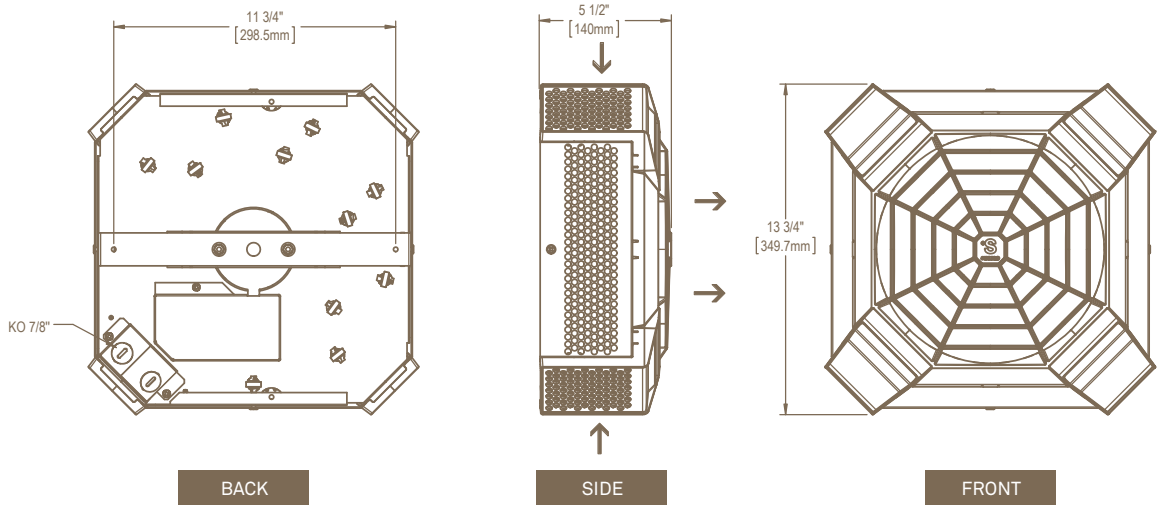

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

CEILING FAN HEATER

ADR SERIES

DRAGON™

THE ONE AND ONLY DRAGON™!

The hallmark of the DRAGON™ is that it recycles residual warm air that has accumulated at the ceiling, mixing it with the cooler air below. The result? Uniform air temperature and energy savings. The DRAGON™ offers an output of 2000 W to 10,000 W, depending on the model, and offers multiple voltages: 208 V, 240 V, 277 V and 480 V. This unit can be ceiling surface mounted or ceiling recessed, suspended at a minimum of 8 feet from the floor. The DRAGON™ is well-suited for building entryways, stairwells, warehouses, garages, workshops, and hallways. Nothing beats the power of the DRAGON™!

3 YEAR WARRANTY

HIGH-EFFICIENCY AIR RECYCLING AND RECOVERY

CHOICE OF 2000 W TO 10 000 W

NICHROME ELEMENT
OFFERING STATE-OF-THE ART EFFICIENCY

SURFACE MOUNTED OR RECESSED INSTALLATION

OPTIONAL OFS MODEL TO CONTROL THE FAN-ONLY MODE WITH A WALL SWITCH

IDEAL FOR:
BUILDING ENTRYWAY, WAREHOUSE, STAIRWELL, GARAGE, WORKSHOP

ACCESSORIES

PRODUCT	DESCRIPTION
DRT1	built-in tamper-proof single pole thermostat (ADRR, ADRI or ADRII models)
DRITBA1*	T-bar adapter (ADRI models)
DRIITBA1*	T-bar adapter (ADRII models)
DRC24RX*	relay kit without transformer 24 V (ADRII or ADRR models)
DRIC24RX*	relay kit without transformer 24 V (ADRI models)
DRRDIS277*	disconnect switch [120 V-277 V] (ADRR models)
DRRDIS600*	disconnect switch [347 V-600 V] (ADRR models)

* Add W for white or SW for silica white
* Factory installed

COLORS
- standard: white, silica white
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 20-gauge steel cabinet and 14-gauge steel grille
- quiet helicoidal fan
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

ELEMENT
nichrome element produces instant heat

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- fan-only mode for continuous air circulation, controlled by built-in selection switch
- fan-only mode available for use with wall mounted switch (optional OFS model, wall switch not provided)
- heating-mode, confirmed by pilot light when in function
- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION
- ceiling recessed in a T-bar (ADRR model)
- ceiling surface mounted with bracket to support unit during wiring (ADRI & ADRII models) (included)
- install at a minimum distance from adjacent or surrounding walls: 12 in. (ADRR or ADRI models); 24 in. (ADRII models)
- mounting heights: 8 ft. (2 kW or 3 kW units); 10 ft. (4 kW or 5 kW units); 12 ft. (7.5 kW or 10 kW units)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS (ADRR MODELS)

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	FLOW	WEIGHT
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	CFM	LB
ADRR0281	ADRR0281T	ADRR0281C	ADRR0281C24	2000	6825	208	250	30
---	ADRR0283CT*	ADRR0283C*	ADRR0283C24*	2000	6825	208	250	30
ADRR0221	ADRR0221T	ADRR0221C	ADRR0221C24	2000	6825	240	250	30
---	ADRR0271CT	ADRR0271C	ADRR0271C24	2000	6825	277	250	30
---	ADRR0251CT	ADRR0251C	ADRR0251C24	2000	6825	480	250	30
---	ADRR0253CT*	ADRR0253C*	ADRR0253C24*	2000	6825	480	250	30
ADRR0381	ADRR0381T	ADRR0381C	ADRR0381C24	3000	10238	208	250	32.5
---	ADRR0383CT*	ADRR0383C*	ADRR0383C24*	3000	10238	208	250	32.5
ADRR0321	ADRR0321T	ADRR0321C	ADRR0321C24	3000	10238	240	250	32.5
---	ADRR0371CT	ADRR0371C	ADRR0371C24	3000	10238	277	250	32.5
---	ADRR0351CT	ADRR0351C	ADRR0351C24	3000	10238	480	250	32.5
---	ADRR0353CT*	ADRR0353C*	ADRR0353C24*	3000	10238	480	250	32.5
ADRR0481	ADRR0481T	ADRR0481C	ADRR0481C24	4000	13651	208	450	32.5
---	ADRR0483CT*	ADRR0483C*	ADRR0483C24*	4000	13651	208	450	32.5
ADRR0421	ADRR0421T	ADRR0421C	ADRR0421C24	4000	13651	240	450	32.5
---	ADRR0471CT	ADRR0471C	ADRR0471C24	4000	13651	277	450	32.5
---	ADRR0451CT	ADRR0451C	ADRR0451C24	4000	13651	480	450	32.5
---	ADRR0453CT*	ADRR0453C*	ADRR0453C24*	4000	13651	480	450	32.5
---	ADRR0581T	ADRR0581C	ADRR0581C24	5000	17064	208	450	34
---	ADRR0583CT*	ADRR0583C*	ADRR0583C24*	5000	17064	208	450	34
ADRR0521	ADRR0521T	ADRR0521C	ADRR0521C24	5000	17064	240	450	34
---	ADRR0571CT	ADRR0571C	ADRR0571C24	5000	17064	277	450	34
---	ADRR0551CT	ADRR0551C	ADRR0551C24	5000	17064	480	450	34
---	ADRR0553CT*	ADRR0553C*	ADRR0553C24*	5000	17064	480	450	34

Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Add OFS to control fan-only mode with a wall switch (not provided)
*Three-phase unit
--- not available

ADRR MODEL (RECESSED)

A REVOLUTIONARY METHOD OF HEATING, ELIMINATING THE NECESSITY OF THE TRADITIONAL CEILING FAN. The Dragon recuperates the warm air that would otherwise accumulate at the ceiling and recirculates it throughout the room.

ADRII MODEL (SURFACE MOUNTED)

(FOLLOWING PAGE)

A UNIQUE SOURCE OF HEAT OFFERING PERFORMANCE, STYLE, COMFORT AND ECONOMY! Ideal for garages, commercial entrances, factories and warehouses

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS (ADRI AND ADRII MODELS)

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	FLOW	WEIGHT
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	CFM	LB
ADRI0281	ADRI0281T	---	ADRI0281C24	2000	6825	208	250	16
ADRI0221	ADRI0221T	---	ADRI0221C24	2000	6825	240	250	16
ADRI0381	ADRI0381T	---	ADRI0381C24	3000	10 238	208	250	16
ADRI0321	ADRI0321T	---	ADRI0321C24	3000	10 238	240	250	16
ADRI0481	ADRI0481T	---	ADRI0481C24	4000	13 651	208	450	16
ADRI0421	ADRI0421T	---	ADRI0421C24	4000	13 651	240	450	16
---	ADRI0581T	---	ADRI0581C24	5000	17 064	208	450	16
ADRI0521	ADRI0521T	---	ADRI0521C24	5000	17 064	240	450	16
---	ADRII0281T	ADRII0281C	ADRII0281C24	2000	6825	208	450	45
---	ADRII0283CT*	ADRII0283C*	ADRII0283C24*	2000	6825	208	450	45
---	ADRII0221T	ADRII0221C	ADRII0221C24	2000	6825	240	450	45
---	ADRII0271CT	ADRII0271C	ADRII0271C24	2000	6825	277	450	45
---	ADRII0251CT	ADRII0251C	ADRII0251C24	2000	6825	480	450	45
---	ADRII0253CT*	ADRII0253C*	ADRII0253C24*	2000	6825	480	450	45
---	ADRII0381T	ADRII0381C	ADRII0381C24	3000	10 238	208	450	45
---	ADRII0383CT*	ADRII0383C*	ADRII0383C24*	3000	10 238	208	450	45
---	ADRII0321T	ADRII0321C	ADRII0321C24	3000	10 238	240	450	45
---	ADRII0371CT	ADRII0371C	ADRII0371C24	3000	10 238	277	450	45
---	ADRII0351CT	ADRII0351C	ADRII0351C24	3000	10 238	480	450	45
---	ADRII0353CT*	ADRII0353C*	ADRII0353C24*	3000	10 238	480	450	45
---	ADRII0481T	ADRII0481C	ADRII0481C24	4000	13 651	208	450	45
---	ADRII0483CT*	ADRII0483C*	ADRII0483C24*	4000	13 651	208	450	45
---	ADRII0421T	ADRII0421C	ADRII0421C24	4000	13 651	240	450	45
---	ADRII0471CT	ADRII0471C	ADRII0471C24	4000	13 651	277	450	45
---	ADRII0451CT	ADRII0451C	ADRII0451C24	4000	13 651	480	450	45
---	ADRII0453CT*	ADRII0453C*	ADRII0453C24*	4000	13 651	480	450	45
---	ADRII0581T	ADRII0581C	ADRII0581C24	5000	17 064	208	450	45
---	ADRII0583CT*	ADRII0583C*	ADRII0583C24*	5000	17 064	208	450	45
---	ADRII0521T	ADRII0521C	ADRII0521C24	5000	17 064	240	450	45
---	ADRII0571CT	ADRII0571C	ADRII0571C24	5000	17 064	277	450	45
---	ADRII0551CT	ADRII0551C	ADRII0551C24	5000	17 064	480	450	45
---	ADRII0553CT*	ADRII0553C*	ADRII0553C24*	5000	17 064	480	450	45
---	ADRII0781CT	ADRII0781C	ADRII0781C24	7500	25 595	208	700	45
---	ADRII0783CT*	ADRII0783C*	ADRII0783C24*	7500	25 595	208	700	45
---	ADRII0721CT	ADRII0721C	ADRII0721C24	7500	25 595	240	700	45
---	ADRII0771CT	ADRII0771C	ADRII0771C24	7500	25 595	277	700	45
---	ADRII0751CT	ADRII0751C	ADRII0751C24	7500	25 595	480	700	45
---	ADRII0753CT*	ADRII0753C*	ADRII0753C24*	7500	25 595	480	700	45
---	ADRII1081CT	ADRII1081C	ADRII1081C24	10 000	34 127	208	700	45
---	ADRII1083CT*	ADRII1083C*	ADRII1083C24*	10 000	34 127	208	700	45
---	ADRII1021CT	ADRII1021C	ADRII1021C24	10 000	34 127	240	700	45
---	ADRII1071CT	ADRII1071C	ADRII1071C24	10 000	34 127	277	700	45
---	ADRII1051CT	ADRII1051C	ADRII1051C24	10 000	34 127	480	700	45
---	ADRII1053CT*	ADRII1053C*	ADRII1053C24*	10 000	34 127	480	700	45

Add W for white or SW for silica white (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
Add OFS to control fan-only mode with a wall switch (not provided)
*Three-phase unit
--- not available

THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE	HEAT RISE
	KW	FT.	°F
ADRI	2	23	40
ADRI	3	23	45
ADRI	4	23	60
ADRI	5	23	72
ADRII	2	23	38
ADRII	3	23	56
ADRII	4	23	74
ADRII	5	23	79
ADRII	7.5	30	76
ADRII	10	30	106
ADRR	2	23	29
ADRR	3	23	32
ADRR	4	23	53
ADRR	5	23	68

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL DRAWINGS

ADRI MODEL

surface mounted

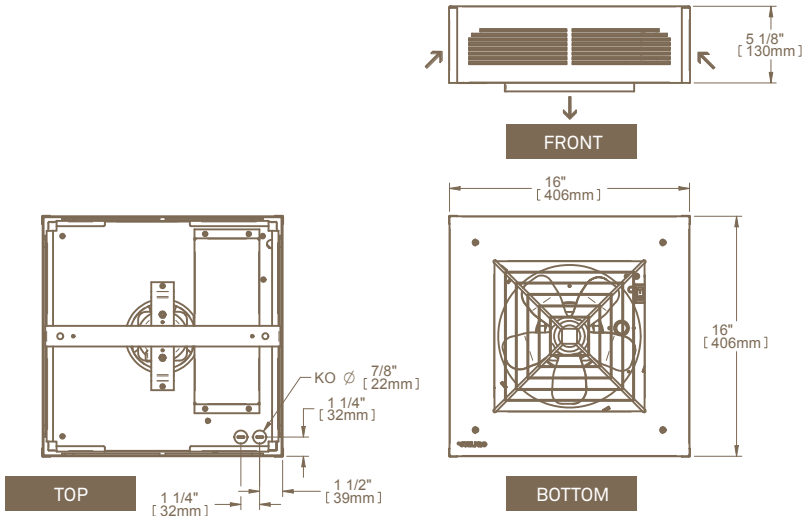

ADRII MODEL

surface mounted

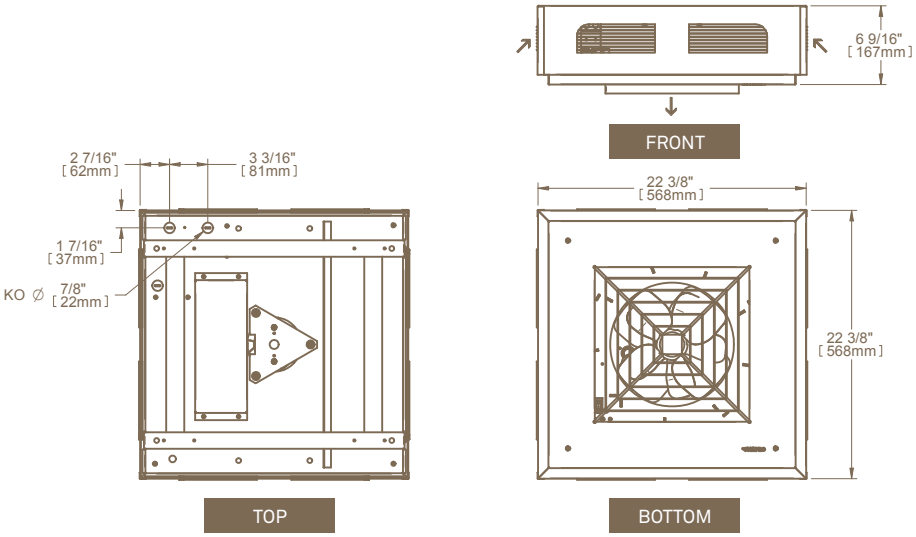

ADRR MODEL

recessed

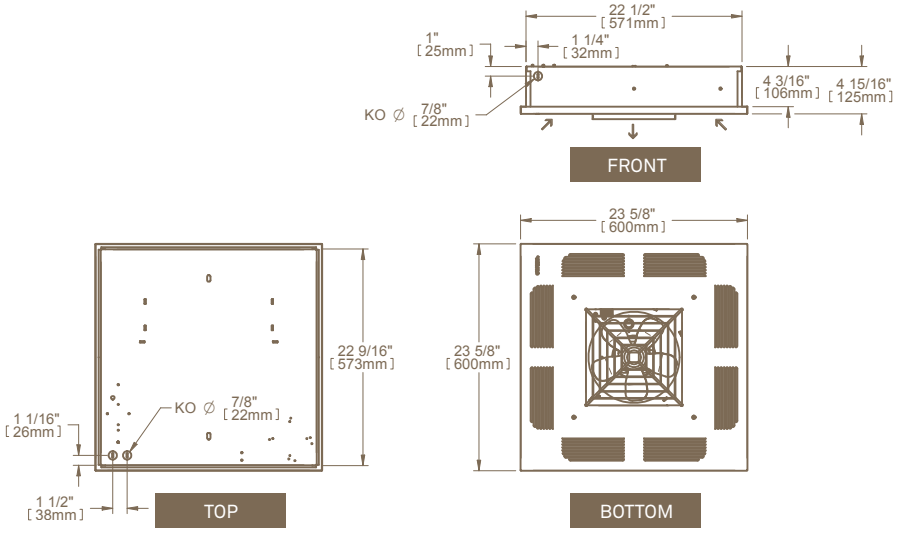

CEILING FAN HEATER

ACF SERIES

THE SPACE-SAVER

°STELPRO has the space-saving solution for heating small entryways, hallways and lobbies: the sturdy, reliable ACF ceiling fan heater. Built to last, the ACF pushes heat downward, mixing with the cold air below. It can be surface mounted or recessed into conventional ceilings, or recessed in suspended ceilings. Whether installed in an entryway or hallway, the ACF has all the heat you need in an enclosed space.

NEW GRILLE WITH ROUNDED SIDES
DURABLE AND STYLISH

THE PERFECT SOLUTION FOR ENTRYWAYS AND HALLWAYS

CEILING MOUNTED, PREVENTING VANDALISM

MULTIPLE INSTALLATION OPTIONS
CAN BE SURFACE MOUNTED OR RECESSED - OR RECESSED IN A SUSPENDED CEILING

NEW DISCONNECT SWITCH
OPTIONAL

IDEAL FOR:
ENTRYWAYS, HALLWAYS, CORRIDORS, OFFICE BUILDINGS

COLORS
- standard: white, silica white
- luxurious finish: stainless steel (surcharge)
- optional: almond, black, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or stainless steel

MANUFACTURING
- 20-gauge steel cabinet and 18-gauge steel grille
- fan: 1 x 160 CFM (single unit) - 2 x 160 CFM (double unit)
- thermal protection with automatic reset

ELEMENT
nichrome element producing instant heat

CONTROL
connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION
- ceiling
- recessed or surface mounted with surface adapter (optional)
- T-Bar adapter (optional)

ROUNDED SIDES

ACCESSORIES

PRODUCT	DESCRIPTION
WFT1	built-in single pole thermostat [120 V - 600 V]
WFT2	built-in double pole thermostat [120 V - 600 V]
WFSA1*	surface adapter (single unit)
WFSA2*	surface adapter (double unit)
WFSA1SS	stainless steel surface adapter (single unit)
WFSA2SS	stainless steel surface adapter (double unit)
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles
CFTBA1*	T-Bar adapter (single unit)
CFTBA2*	T-Bar adapter (double unit)
CFTBA1SS	stainless steel T-Bar adapter (single unit)
CFTBA2SS	stainless steel T-Bar adapter (double unit)
WFC24RX*	relay kit without transformer 24 V

* Add W for white or SW for silica white
* Factory installed

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	PHASE	WEIGHT	MODEL
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	NB	LB	UNIT
ACF1508	ACF1508T	ACF1508C	ACF1508C24	1500	5119	208	1	20	SINGLE
ACF1502	ACF1502T	ACF1502C	ACF1502C24	1500/1125	5119	240/208	1	20	SINGLE
ACF1507	ACF1507T	ACF1507C	ACF1507C24	1500	5119	277	1	20	SINGLE
---	ACF1505T	ACF1505C	ACF1505C24	1500	5119	480	1	20	SINGLE
ACF2008	ACF2008T	ACF2008C	ACF2008C24	2000	6825	208	1	20	SINGLE
ACF2002	ACF2002T	ACF2002C	ACF2002C24	2000/1500	6825	240/208	1	20	SINGLE
ACF2007	ACF2007T	ACF2007C	ACF2007C24	2000	6825	277	1	20	SINGLE
---	ACF2005T	ACF2005C	ACF2005C24	2000	6825	480	1	20	SINGLE
ACF3008	ACF3008T	ACF3008C	ACF3008C24	3000	10238	208	1	20	SINGLE
ACF3002	ACF3002T	ACF3002C	ACF3002C24	3000/2250	10238	240/208	1	20	SINGLE
ACF3007	ACF3007T	ACF3007C	ACF3007C24	3000	10238	277	1	20	SINGLE
---	ACF3005T	ACF3005C	ACF3005C24	3000	10238	480	1	20	SINGLE
ACF4008	ACF4008T	ACF4008C	ACF4008C24	4000	13651	208	1	20	SINGLE
ACF4002	ACF4002T	ACF4002C	ACF4002C24	4000/3000	13651	240/208	1	20	SINGLE
ACF4007	ACF4007T	ACF4007C	ACF4007C24	4000	13651	277	1	20	SINGLE
---	ACF4005T	ACF4005C	ACF4005C24	4000	13651	480	1	20	SINGLE
---	ACF6008CT	ACF6008C	ACF6008C24	6000	20476	208	1	40	DOUBLE
---	ACF6002T	ACF6002C	ACF6002C24	6000/4500	20476	240/208	1	40	DOUBLE
---	ACF6007T	ACF6007C	ACF6007C24	6000	20476	277	1	40	DOUBLE
---	ACF6005T	ACF6005C	ACF6005C24	6000	20476	480	1	40	DOUBLE
---	ACF8008CT	ACF8008C	ACF8008C24	8000	27302	208	1	40	DOUBLE
---	ACF8002CT	ACF8002C	ACF8002C24	8000/6000	27302	240/208	1	40	DOUBLE
---	ACF8007CT	ACF8007C	ACF8007C24	8000	27302	277	1	40	DOUBLE
---	ACF8005CT	ACF8005C	ACF8005C24	8000	27302	480	1	40	DOUBLE

Add W for white, SW for silica white or SS for stainless steel (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

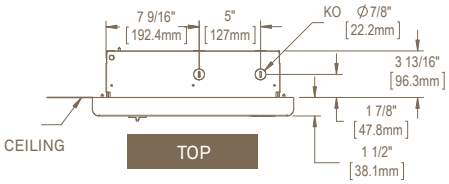

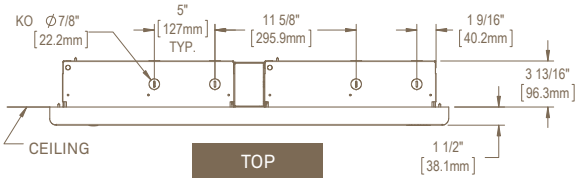



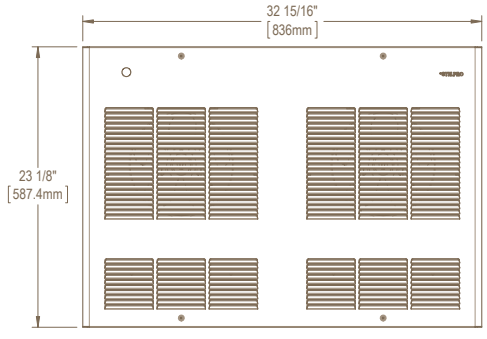

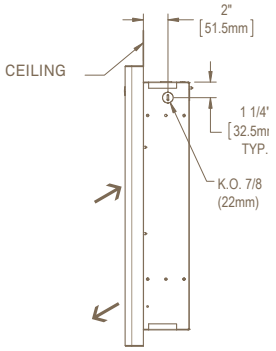

SINGLE UNIT

DOUBLE UNIT

PORTABLE HEATER

MULTIPURPOSE – ASCH SERIES

EFFICIENT, SAFE AND VERSATILE

Any construction worker will tell you that the ASCH is the fast-acting heating unit most often found on construction sites, resulting in the nick-name “the construction heater”. Housed in a 20-gauge steel casing, it features a rugged protective grille and nichrome element for instant heat at start-up. Despite its small size, this heating powerhouse boasts up to 4800 W. The ASCH can be placed on the ground or against a wall, using a support bracket, available as an option. This heater is right at home on construction sites and in workshops and garages. The ASCH: when you need rapid, reliable heat.

SAFE AND RUGGED (20-GAUGE STEEL)

UP TO 4800 W HOUSED IN A SMALL UNIT

OPEN COIL GENERATES INSTANT HEAT

PERMANENTLY ENCLOSED LUBRICATED MOTOR (ASCH4800T)

VERSATILE: PERMANENT OR TEMPORARY INSTALLATION
WITH OPTIONAL SUPPORT BRACKET

ACCESSORY

PRODUCT	DESCRIPTION
SCH-WBB	mounting bracket

IDEAL FOR:
CONSTRUCTION SITES

COLORS
red (ASCH40T and ASCH48T models), yellow (ASCH4800T)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft. 12 Awg. molded cable with 3-prong grounded, 30 A 250 V plug (except for ASCH48TWBPL)
- 6 ft. 12 Awg. molded cable for hard-wired connection (ASCH48TWBPL)
- thermal protection with automatic reset

MOTOR
- 250 CFM fan (ASCH40T and ASCH48T models)
- permanently enclosed lubricated motor and 300 CFM fan (ASCH4800T)

ELEMENT
- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

CONTROL
built-in thermostat with control knob protector

INSTALLATION
- connects to a standard 30 A 250 V (ASCH48T and ASCH4800T models) or a 20 A 250 V (ASCH40T) grounded receptacle (except for ASCH48TWBPL)
- hard-wired into a wall junction box (ASCH48TWBPL)
- mounting bracket that can rotate at 360° while preventing the unit from tipping

WARRANTY
2 years (ASCH40T and ASCH48T models) and 3 years (ASCH4800T)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	CONNECTION	MOUNTING BRACKET	COLOR	WEIGHT
CODE	WATTS	BTU/H	VOLTS				LB
ASCH40T	4000/3000	13 651	240/208	20 A 250 V PLUG	NO	RED	13
ASCH48T	4800/3600	16 381	240/208	30 A 250 V PLUG	NO	RED	13
ASCH4800T	4800/3600	16 381	240/208	30 A 250 V PLUG	NO	YELLOW	13
ASCH48TWB	4800/3600	16 381	240/208	30 A 250 V PLUG	YES	RED	13
ASCH48TWBPL	4800/3600	16 381	240/208	HARD-WIRED	YES	RED	13

THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE	HEAT RISE
	KW	FT.	°F
ASCH48T	**4.8**	19'4"	145
ASCH4800T	**4.8**	21'	125

TECHNICAL DRAWINGS

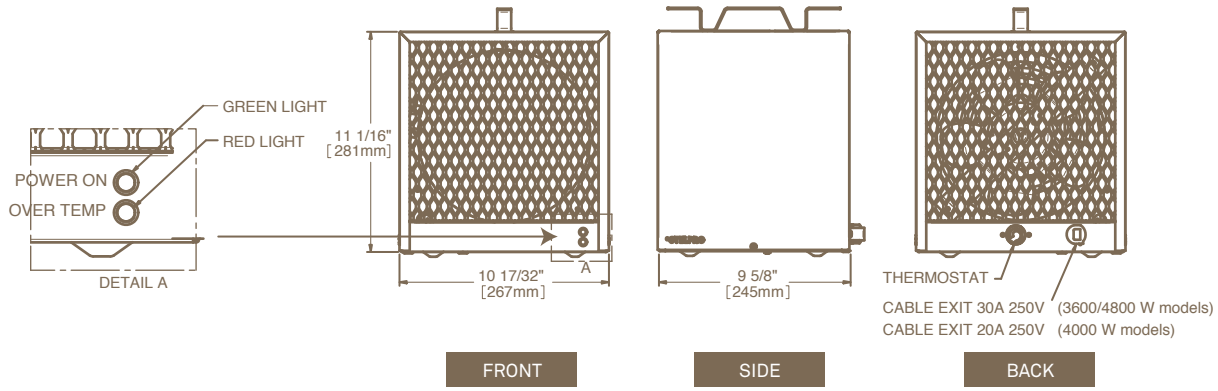

COMMERCIAL & RESIDENTIAL UNIT HEATER

ARUH SERIES

OXFORD™ SERIES | SÉRIE

A VERSATILE WORKHORSE

The ARUH unit heater is small on price and big on heat. These heavy-duty units are well suited to situations where large amounts of heat must be provided in wide open spaces such as garages, workshops, commercial warehouses and construction sites. This unit has a powerful output up to 5000 W with a voltage of 240/208. The ARUH has adjustable louvers that allow you to direct heat right from the source. With or without a built-in thermostat, it provides instant heat. Quiet, lightweight and easy-to-install with a universal wall or ceiling mounting bracket, this unit heater is everything you expect for less. Guaranteed productivity!

3 YEAR WARRANTY

INSTANT HEAT

ADJUSTABLE LOUVERS ALLOW YOU TO DIRECT HEAT

THERMAL PROTECTION

WALL OR CEILING INSTALLATION
SUPPORT BRACKET INCLUDED

ENCLOSED & PERMANENTLY LUBRICATED MOTOR

2 KW TO 5 KW MODELS AVAILABLE

IDEAL FOR:
CONSTRUCTION SITES, GARAGES, WORKSHOPS, SMALL COMMERCIAL SPACES

COLOR
textured charcoal

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 20-gauge steel cabinet
- totally enclosed and factory lubricated motor
- 350 CFM quiet helicoidal fan
- adjustable louvers
- thermal protection with automatic reset

ELEMENT
nichrome element produces instant heat

CONTROL
- built-in thermostat (included with T series)
- wall thermostat (not included)

INSTALLATION
wall or ceiling mounted with universal mounting bracket (included with unit)

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

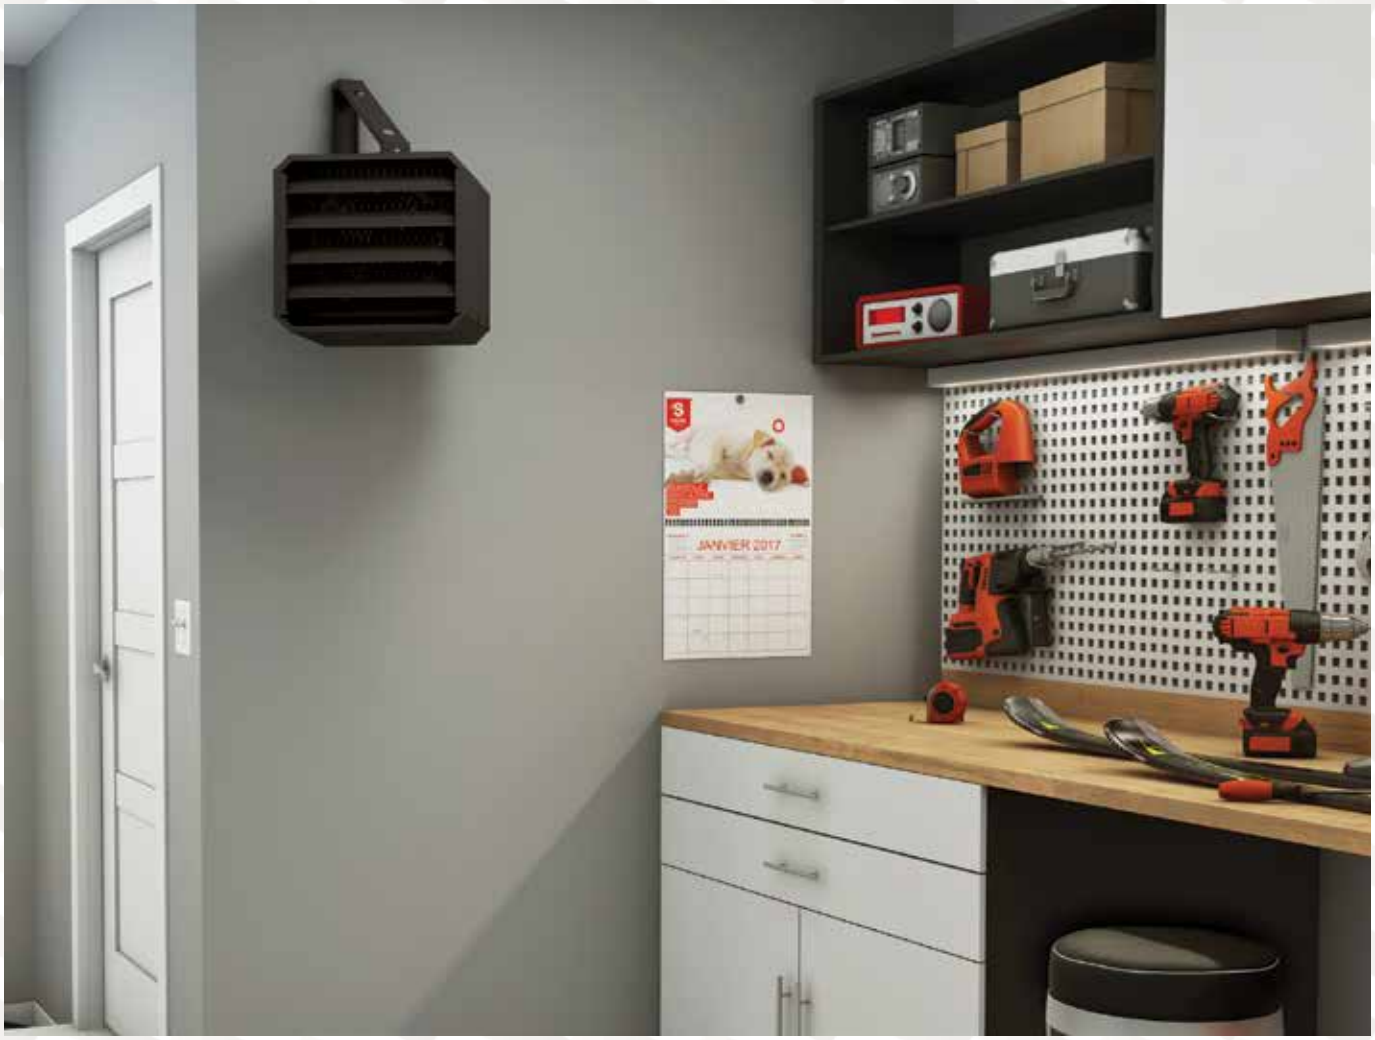

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	24 V CONTROL	POWER		PHASE	FLOW	VOLTAGE	THROW DISTANCE	HEAT RISE	WEIGHT
CODE	CODE	CODE	WATTS	BTU/H	NB	CFM	VOLTS	FT.	°F	LB
ARUH2CHAR	**ARUH2TCHAR**	**ARUH2C24CHAR**	2000/1500	6825	1	350	240/208	10	48	20
ARUH3CHAR	**ARUH3TCHAR**	**ARUH3C24CHAR**	3000/2250	10238	1	350	240/208	10	60	20
ARUH4CHAR	**ARUH4TCHAR**	**ARUH4C24CHAR**	4000/3000	13651	1	350	240/208	10	82	20
ARUH5CHAR	**ARUH5TCHAR**	**ARUH5C24CHAR**	5000/3750	17064	1	350	240/208	10	114	20

TECHNICAL DRAWINGS

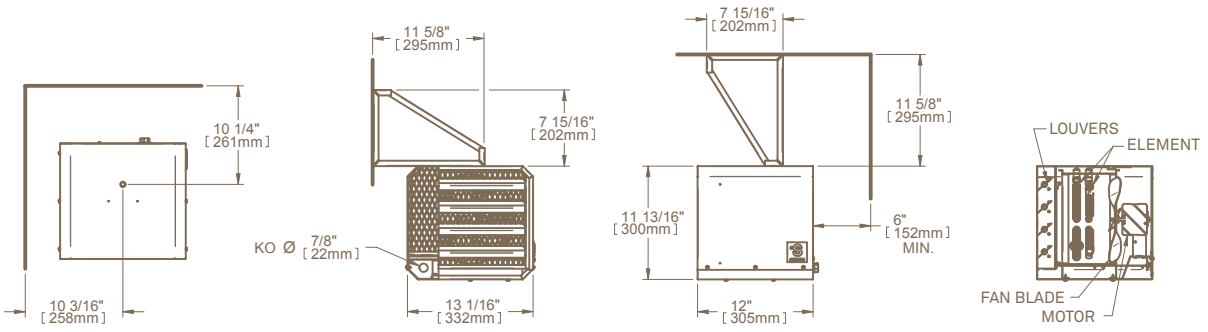

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

COMMERCIAL & INDUSTRIAL UNIT HEATER

ASHU SERIES

OXFORD™ SERIES | SÉRIE

THE POWER OF DISPERSION

°STELPRO designs heaters for all circumstances. Take the ASHU, the large volume heater that is distinguished by its appealing appearance, its manufacturing and its sturdy composition. It is usually installed in large garages, but it is not uncommon for it to be seen in warehouses or any other kind of commercial construction site requiring a generous volume of heat. The ASHU works with great ease and has an incredible power scale from 2 kW to 60 kW. What could be better!

NEW COLOR

3 YEAR WARRANTY

INSTANT HEAT

PERMANENTLY LUBRICATED MOTOR

WIDE RANGE OF POWER: 2 KW TO 60 KW

THERMALLY PROTECTED

WALL OR CEILING INSTALLATION
SUPPORT BRACKET INCLUDED

IDEAL FOR:
WAREHOUSES, FACTORIES, INDOOR PARKING GARAGES, LARGE INDUSTRIAL AND COMMERCIAL AREAS

ACCESSORIES

PRODUCT	DESCRIPTION
SHUT1	built-in single pole thermostat (capillary)
SHUT2	built-in double pole thermostat (capillary)
SHUFS*	fan switch
SHUDIS*	disconnect switch [80 A]
SHUC24RX*	relay kit without transformer 24 V
SHUFS-RCV	remote control circuit for ventilation mode 240 V

* Factory installed

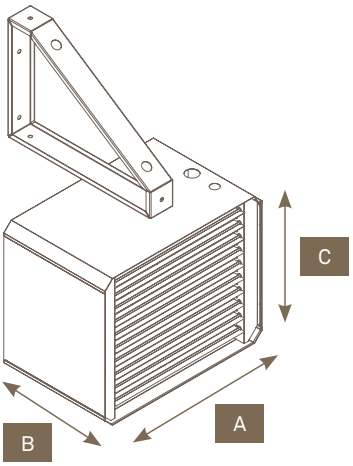

COLOR
textured charcoal

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- heavy-duty, 18-gauge steel cabinet
- adjustable louvers and protective screen
- thermal protection with automatic reset

MOTOR
permanently enclosed lubricated ball bearing motor for long-lasting operation

ELEMENT
nichrome element produces instant heat

CONTROL
connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION
- wall or ceiling mounted with universal mounting bracket (included)
- minimum distance from adjacent walls: 6 in. (2 kW to 30 kW units), 12 in. (40 kW to 60 kW units)
- maximum mounting heights: 8 ft. (2 kW to 10 kW units), 10 ft. (15 kW to 30 kW units), 15 ft. (40 kW to 60 kW units)

DIMENSIONS

UNIT	A	B	C	MINIMUM CLEARANCE		WEIGHT
KW	IN.	IN.	IN.	CEILING	WALL	LB (APPROX.)
2-10	18 3/4	15 1/2	12 1/16	3 13/16	10 1/4	40
15-30	22 3/4	17 5/8	15 15/16	3 13/16	8 3/4	67
40-60	27 1/2	17 3/4	22 1/4	3 5/16	12 1/2	100

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	VOLTAGE	POWER		FLOW	THROW DISTANCE	HEAT RISE
CODE	CODE	CODE	CODE	VOLTS	KW	BTU/H	CFM	FT.	°F
ASHU0281CHAR	ASHU0281TCHAR	ASHU0281CCHAR	ASHU0281C24CHAR	208	2	6825	250	28	31
---	ASHU0283CTCHAR*	ASHU0283CCHAR*	ASHU0283C24CHAR*	208	2	6825	250	28	31
ASHU0221CHAR	ASHU0221TCHAR	ASHU0221CCHAR	ASHU0221C24CHAR	240	2	6825	250	28	31
ASHU0271CHAR	ASHU0271T CHAR	ASHU0271CCHAR	ASHU0271C24CHAR	277	2	6825	250	28	31
---	ASHU0251CTCHAR	ASHU0251CCHAR	ASHU0251C24CHAR	480	2	6825	250	28	31
---	ASHU0253CTCHAR*	ASHU0253CCHAR*	ASHU0253C24CHAR*	480	2	6825	250	28	31
ASHU0381CHAR	ASHU0381TCHAR	ASHU0381CCHAR	ASHU0381C24CHAR	208	3	10238	250	28	62
---	ASHU0383CTCHAR*	ASHU0383CCHAR*	ASHU0383C24CHAR*	208	3	10238	250	28	62
ASHU0321CHAR	ASHU0321TCHAR	ASHU0321CCHAR	ASHU0321C24CHAR	240	3	10238	250	28	62
ASHU0371CHAR	ASHU0371TCHAR	ASHU0371CCHAR	ASHU0371C24CHAR	277	3	10238	250	28	62
---	ASHU0351CTCHAR	ASHU0351CCHAR	ASHU0351C24CHAR	480	3	10238	250	28	62
---	ASHU0353CTCHAR*	ASHU0353CCHAR*	ASHU0353C24CHAR*	480	3	10238	250	28	62
ASHU0481CHAR	ASHU0481TCHAR	ASHU0481CCHAR	ASHU0481C24CHAR	208	4	13651	250	28	93
---	ASHU0483CTCHAR*	ASHU0483CCHAR*	ASHU0483C24CHAR*	208	4	13651	250	28	93
ASHU0421CHAR	ASHU0421TCHAR	ASHU0421CCHAR	ASHU0421C24CHAR	240	4	13651	250	28	93
ASHU0471CHAR	ASHU0471TCHAR	ASHU0471CCHAR	ASHU0471C24CHAR	277	4	13651	250	28	93
---	ASHU0451CTCHAR	ASHU0451CCHAR	ASHU0451C24CHAR	480	4	13651	250	28	93
---	ASHU0453CTCHAR*	ASHU0453CCHAR*	ASHU0453C24CHAR*	480	4	13651	250	28	93
---	ASHU0581TCHAR	ASHU0581CCHAR	ASHU0581C24CHAR	208	5	17064	450	31	99
---	ASHU0583CTCHAR*	ASHU0583CCHAR*	ASHU0583C24CHAR*	208	5	17064	450	31	99
ASHU0521CHAR	ASHU0521TCHAR	ASHU0521CCHAR	ASHU0521C24CHAR	240	5	17064	450	31	99
ASHU0571CHAR	ASHU0571TCHAR	ASHU0571CCHAR	ASHU0571C24CHAR	277	5	17064	450	31	99
---	ASHU0551CTCHAR	ASHU0551CCHAR	ASHU0551C24CHAR	480	5	17064	450	31	99
---	ASHU0553CTCHAR*	ASHU0553CCHAR*	ASHU0553C24CHAR*	480	5	17064	450	31	99
---	ASHU0781CTCHAR	ASHU0781CCHAR	ASHU0781C24CHAR	208	7.5	25595	700	31	97
---	ASHU0783CTCHAR*	ASHU0783CCHAR*	ASHU0783C24CHAR*	208	7.5	25595	700	31	97
---	ASHU0721CTCHAR	ASHU0721CCHAR	ASHU0721C24CHAR	240	7.5	25595	700	31	97
---	ASHU0771CTCHAR	ASHU0771CCHAR	ASHU0771C24CHAR	277	7.5	25595	700	31	97
---	ASHU0751CTCHAR	ASHU0751CCHAR	ASHU0751C24CHAR	480	7.5	25595	700	31	97
---	ASHU0753CTCHAR*	ASHU0753CCHAR*	ASHU0753C24CHAR*	480	7.5	25595	700	31	97
---	ASHU1081CTCHAR	ASHU1081CCHAR	ASHU1081C24CHAR	208	10	34127	700	31	153
---	ASHU1083CTCHAR*	ASHU1083CCHAR*	ASHU1083C24CHAR*	208	10	34127	700	31	153
---	ASHU1021CTCHAR	ASHU1021CCHAR	ASHU1021C24CHAR	240	10	34127	700	31	153
---	ASHU1071CTCHAR	ASHU1071CCHAR	ASHU1071C24CHAR	277	10	34127	700	31	153
---	ASHU1051CTCHAR	ASHU1051CCHAR	ASHU1051C24CHAR	480	10	34127	700	31	153
---	ASHU1053CTCHAR*	ASHU1053CCHAR*	ASHU1053C24CHAR*	480	10	34127	700	31	153
---	ASHU1581CTCHAR	ASHU1581CCHAR	ASHU1581C24CHAR	208	15	51191	1300	35	93
---	ASHU1583CTCHAR*	ASHU1583CCHAR*	ASHU1583C24CHAR*	208	15	51191	1300	35	93
---	ASHU1521CTCHAR	ASHU1521CCHAR	ASHU1521C24CHAR	240	15	51191	1300	35	93
---	ASHU1571CTCHAR	ASHU1571CCHAR	ASHU1571C24CHAR	277	15	51191	1300	35	93
---	ASHU1551CTCHAR	ASHU1551CCHAR	ASHU1551C24CHAR	480	15	51191	1300	35	93
---	ASHU1553CTCHAR*	ASHU1553CCHAR*	ASHU1553C24CHAR*	480	15	51191	1300	35	93
---	ASHU2081CTCHAR	ASHU2081CCHAR	ASHU2081C24CHAR	208	20	68254	1300	37	160
---	ASHU2083CTCHAR*	ASHU2083CCHAR*	ASHU2083C24CHAR*	208	20	68254	1300	37	160
---	ASHU2021CTCHAR	ASHU2021CCHAR	ASHU2021C24CHAR	240	20	68254	1300	37	160
---	ASHU2071CTCHAR	ASHU2071CCHAR	ASHU2071C24CHAR	277	20	68254	1300	37	160
---	ASHU2051CTCHAR	ASHU2051CCHAR	ASHU2051C24CHAR	480	20	68254	1300	37	160
---	ASHU2053CTCHAR*	ASHU2053CCHAR*	ASHU2053C24CHAR*	480	20	68254	1300	37	160
---	ASHU2583CTCHAR*	ASHU2583CCHAR*	ASHU2583C24CHAR*	208	25	85318	1300	33'6"	240
---	ASHU2553CTCHAR*	ASHU2553CCHAR*	ASHU2553C24CHAR*	480	25	85318	1300	33'6"	240
---	ASHU3083CTCHAR*	ASHU3083CCHAR*	ASHU3083C24CHAR*	208	30	102381	1400	35	243
---	ASHU3053CTCHAR*	ASHU3053CCHAR*	ASHU3053C24CHAR*	480	30	102381	1400	35	243
---	ASHU4053CTCHAR*	ASHU4053CCHAR*	ASHU4053C24CHAR*	480	40	136508	2100	35	237
---	ASHU5053CTCHAR*	ASHU5053CCHAR*	ASHU5053C24CHAR*	480	50	170635	2100	35	254
---	ASHU6053CTCHAR*	ASHU6053CCHAR*	ASHU6053C24CHAR*	480	60	204762	2100	35	280

* Three-phase unit that can be field-converted to a single phase unit
* Three-phase unit
--- not available

INFRARED RADIANT HEATER

ASIRH SERIES

ZENITH™

RADIANT HEAT, WHEN AND WHERE YOU WANT IT

Warm up your summer nights and autumn days with our ZENITH™ infrared radiant heater. It's perfect for terraces, outdoor waiting areas, arenas, and spas. It can even be used in hard-to-heat areas such as factories. With its 14-gauge aluminum cabinet and stainless steel grille, the ZENITH™ is lightweight yet rugged. Now, you can create your own comfortable environment, any time of the year.

GENERATES INSTANT HEAT

COMPACT, LIGHTWEIGHT, STURDY AND EASY TO INSTALL

CLEAN ELECTRICAL ENERGY WITH NO AIR DISPLACEMENT

WEATHER-RESISTANT MODELS AVAILABLE

347 V MODEL AVAILABLE

IDEAL FOR:

TERRACES, WAREHOUSES, FACTORIES, OUTDOOR WAITING AREAS, SPAS

COLOR

black

FINISH

super resistant polyester powdercoat

MANUFACTURING

- 14-gauge aluminum housing
- stainless steel grille
- specialized embossed aluminum reflectors which optimize radiant efficiency and reduce glare
- standard mounting bracket (included)

LAMP

- quartz lamp with glare-reducing filter, and tungsten filament produces short-wave infrared heat
- 80% radiant efficiency

CONTROL

electronic dimmer with timer (optional) (SIRHC402-1 or independant switch*)

INSTALLATION

on wall or ceiling with mounting bracket (included) or pole mounted (adaptor not provided), in accordance with clearances and installation heights as specified in the installation manual

ACCESSORIES

PRODUCT	DESCRIPTION
KIT-ESIRH151	infrared replacement element 1500 W @ 120 V
KIT-ESIRH202	infrared replacement element 2000 W/1600 W @ 240 V/208 V
KIT-SIRH-SUP1	expandable support from 20 in. to 34 in.
SIRHC402-1	electronic dimmer with timer (silver), 4000 W/3300 W @ 240V/208 V max

FOR MAXIMUM EFFICIENCY

ELECTRONIC DIMMER WITH TIMER (OPTIONAL)

SIRHC402-1

* The power feeding the units can be reduced using controls that meet the following requirements: the controls must be able to handle inductive and resistant loads. They must also have circuits to regulate the start-up current, since this type of appliance generates a high start-up current.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	WEATHER-RESISTANT	POWER		VOLTAGE	FREQUENCY	LENGTH	HEIGHT	DEPTH	WEIGHT
CODE	CODE	WATTS	BTU/H	VOLTS	HZ	IN.	IN.	IN.	LB
ASIRH2002W	**ASIRH2002WR**	2000/1600	6825	240/208	60	19	10	5 5/8	11
ASIRH4002W	**ASIRH4002WR**	4000/3200	13651	240/208	60	19	15 7/8	5 5/8	13.8
ASIRH6002W	**ASIRH6002WR**	6000/4800	20476	240/208	60	19	21 13/16	5 5/8	16.3

TECHNICAL DRAWINGS

2000 W MODEL

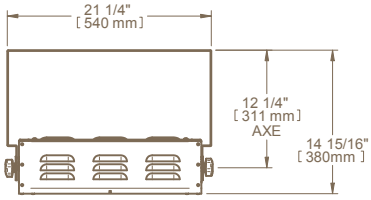

TOP



FRONT



SIDE

4000 W MODEL

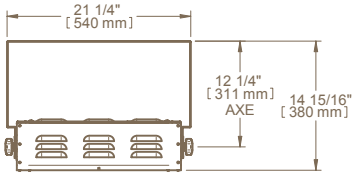

TOP



FRONT



SIDE

4180 W & 6000 W MODELS

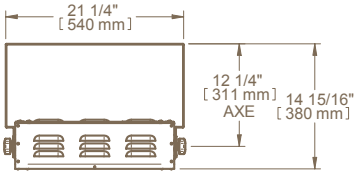

TOP



FRONT



SIDE

FLOOR INSERT CONVECTOR

FI SERIES

A CONVECTOR LIKE NO OTHER!

Just like its name says, the FI floor insert convector recesses into the floor and dissipates heat quietly by means of natural convection, without any fan noise. It can be installed into different types of floors, including wood and concrete, freeing up precious wall and window space. An incredible alternative to conventional baseboards, this versatile floor heater acts as a draft barrier, and can be recessed in front of large windows, sliding doors, or serve as perimeter heating in continuous, end-to-end fashion.

3 YEAR WARRANTY

SILENT OPERATION

FLOOR DROP-IN UNIT

AESTHETIC AND INDESTRUCTIBLE
9-GAUGE EXTRUDED ALUMINUM GRILLE WITH BORDER

TURN-KEY PROJECTS AVAILABLE
FOR PERIPHERIC HEATING WITH BLANK SECTIONS AND ADAPTABLE GRILLE(S) (OPTIONAL)

IDEAL FOR:
OFFICES, SCHOOLS, HOSPITALS, BUSINESSES, LARGE WINDOWS

ACCESSORIES

PRODUCT	DESCRIPTION
FIRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
FIRE156*	built-in electronic low voltage relay [6 A @ 600 V]
FIRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Factory installed

COLORS
- standard: white, silica white, black
- optional: almond, textured charcoal, clear anodized (paint), dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat

MANUFACTURING
- 18-gauge galvanized steel cabinet and 9-gauge extruded aluminum grille
- thermal protection with manual reset
- protective wire mesh to prevent foreign objects from entering the interior of the unit

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION
- floor recessed
- recessed parallel to floor joists
- thanks to its sturdy 18 gauge galvanized steel construction, it can be installed in concrete floors without any need for additional framing. The air vents located on the sides of the casing may be blocked, but it is recommended to keep the area free of obstructions to optimize air output

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 250 W PER LINEAR FOOT			MEDIUM DENSITY 200 W PER LINEAR FOOT			LOW DENSITY 150 W PER LINEAR FOOT			VOLTAGE	LENGTH A	LENGTH B	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	IN.	LB
FI6051	500	1706	**FI6041**	400	1365	**FI6031**	300	1024	120	23 5/8	22 1/16	14
FI6058	500	1706	**FI6048**	400	1365	**FI6038**	300	1024	208	23 5/8	22 1/16	14
FI6052	500	1706	**FI6042**	400	1365	**FI6032**	300	1024	240	23 5/8	22 1/16	14
FI6057	500	1706	---	400	1365	---	300	1024	277	23 5/8	22 1/16	14
FI9071	750	2560	**FI9061**	600	2048	**FI9041**	450	1536	120	35 7/16	33 7/8	22
FI9078	750	2560	**FI9068**	600	2048	**FI9048**	450	1536	208	35 7/16	33 7/8	22
FI9072	750	2560	**FI9062**	600	2048	**FI9042**	450	1536	240	35 7/16	33 7/8	22
FI9077	750	2560	**FI9067**	600	2048	**FI9047**	450	1536	277	35 7/16	33 7/8	22
FI12101	1000	3413	**FI12081**	800	2730	**FI12061**	600	2048	120	47 1/4	45 11/16	30
FI12108	1000	3413	**FI12088**	800	2730	**FI12068**	600	2048	208	47 1/4	45 11/16	30
FI12102	1000	3413	**FI12082**	800	2730	**FI12062**	600	2048	240	47 1/4	45 11/16	30
FI12107	1000	3413	**FI12087**	800	2730	**FI12067**	600	2048	277	47 1/4	45 11/16	30
FI12105	1000	3413	**FI12085**	800	2730	---	600	2048	480	47 1/4	45 11/16	30
FI15121	1250	4266	**FI15101**	1000	3413	**FI15071**	750	2560	120	59 1/16	57 1/2	37
FI15128	1250	4266	**FI15108**	1000	3413	**FI15078**	750	2560	208	59 1/16	57 1/2	37
FI15122	1250	4266	**FI15102**	1000	3413	**FI15072**	750	2560	240	59 1/16	57 1/2	37
FI15127	1250	4266	**FI15107**	1000	3413	**FI15077**	750	2560	277	59 1/16	57 1/2	37
FI15125	1250	4266	**FI15105**	1000	3413	**FI15075**	750	2560	480	59 1/16	57 1/2	37
FI18151	1500	5119	**FI18121**	1200	4095	**FI18091**	900	3071	120	70 7/8	69 3/16	44
FI18158	1500	5119	**FI18128**	1200	4095	**FI18098**	900	3071	208	70 7/8	69 3/16	44
FI18152	1500	5119	**FI18122**	1200	4095	**FI18092**	900	3071	240	70 7/8	69 3/16	44
FI18157	1500	5119	**FI18127**	1200	4095	**FI18097**	900	3071	277	70 7/8	69 3/16	44
FI18155	1500	5119	**FI18125**	1200	4095	**FI18095**	900	3071	480	70 7/8	69 3/16	44
---	1750	5972	**FI21141**	1400	4778	**FI21101**	1050	3583	120	82 11/16	81 1/8	52
FI21178	1750	5972	**FI21148**	1400	4778	**FI21108**	1050	3583	208	82 11/16	81 1/8	52
FI21172	1750	5972	**FI21142**	1400	4778	**FI21102**	1050	3583	240	82 11/16	81 1/8	52
FI21177	1750	5972	**FI21147**	1400	4778	**FI21107**	1050	3583	277	82 11/16	81 1/8	52
FI21175	1750	5972	**FI21145**	1400	4778	**FI21105**	1050	3583	480	82 11/16	81 1/8	52
---	2000	6825	---	1600	5460	**FI24121**	1200	4095	120	94 1/2	92 13/16	59
FI24208	2000	6825	**FI24168**	1600	5460	**FI24128**	1200	4095	208	94 1/2	92 13/16	59
FI24202	2000	6825	**FI24162**	1600	5460	**FI24122**	1200	4095	240	94 1/2	92 13/16	59
FI24207	2000	6825	**FI24167**	1600	5460	**FI24127**	1200	4095	277	94 1/2	92 13/16	59
FI24205	2000	6825	**FI24165**	1600	5460	**FI24125**	1200	4095	480	94 1/2	92 13/16	59

Add W for white, SW for silica white or BK for black (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

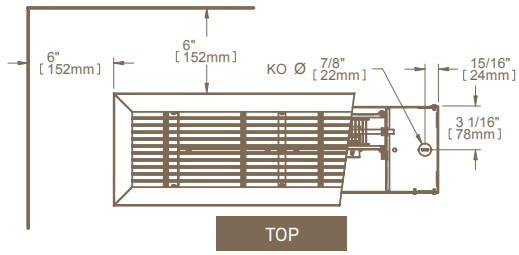

MINI ARCHITECTURAL BASEBOARD

ALUMINUM - AALUX1 SERIES

ALUX™ SERIES | SÉRIE

THE SMALLEST IN ITS CLASS

A mini baseboard that lives up to the great expectations of designers, architects and engineers alike. Only 4 1/2 in. high and 2 in. deep, the AALUX1 can be installed in locations previously thought impossible. Discreetly blending into the decor, the AALUX1 mini architectural baseboard heater is solid, powerful and elegant all at once. Even though it is compact in size, the AALUX1 conforms to the strictest of norms.

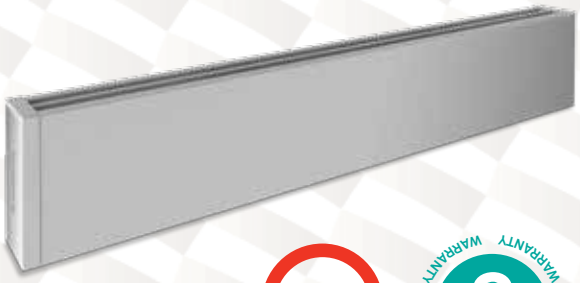

NEW PRODUCT

3 YEAR WARRANTY

EXTRUDED ALUMINUM FRONT COVER WITH A UNIQUE AND LUXURIOUS DESIGN

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

NEW STYLISH WHITE SATIN FINISH

VERSATILE
ADAPTS TO ANY BUILDING'S ARCHITECTURE

PERSONALIZED INSTALLATION
BLANK SECTIONS, PEDESTALS AND CLEAN BACKS AVAILABLE

IDEAL FOR:
COMMERCIAL BUILDINGS OR SHOPPING MALLS, HOSPITALS, OFFICES, HOTELS

ACCESSORIES

PRODUCT	DESCRIPTION
ALUX1T12*	built-in tamper-proof single pole thermostat
ALUX1RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
ALUX1RE156*	built-in electronic low voltage relay [6 A @ 600 V]
ALUX1RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
ALUX1DIS277*	disconnect switch [120 V-277 V]
ALUX1DIS600*	disconnect switch [347 V-600 V]
PK4*	pedestal kit - single (kit of two)
PK4D*	pedestal kit - double (kit of two)
ALUX1JS*	joiner strip (2 in.)
ALUX1IC90*	inside corner (back measures 5 7/8 in. long on each side)
ALUX1OC90*	outside corner (back measures 5 7/8 in. long on each side)
ALUX1CB**	clean back (fully finished, no mounting holes or knockouts)

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal
* Add W for white, SW for silica white or CAP for clear anodised (paint)
* Add W for white, SW for silica white or CA for clear anodised (finish)
* Factory installed

NOT FOR RESIDENTIAL USE

COLORS
- standard: white, silica white
- luxurious finish: clear anodized (surcharge)
- optional: almond, black, textured charcoal, dark brown

FINISH
epoxy-polyester powdercoat or clear anodized finish

MANUFACTURING
- 2 in. x 4 1/2 in. compact profile
- solid 20-gauge steel cabinet
- extremely resistant extruded aluminum front cover with a thickness equivalent to 10 gauge
- bottom air intake and top air discharge
- thermal protection with automatic reset
- full-length wireway

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left junction box only (optional)

INSTALLATION
- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- at least 2 in. from the floor
- wiring compartment at both ends of unit
- for a continuous effect, custom blank sections with a simple attach system are available (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

150 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	VOLTS	IN.	LB
AALUX106038	300	1024	208	23 5/8	6.4
AALUX106032	300/225	1024	240/208	23 5/8	6.4
AALUX109048	450	1536	208	35 7/16	9.1
AALUX109042	450/338	1536	240/208	35 7/16	9.1
AALUX109047	450	1536	277	35 7/16	9.1
AALUX112068	600	2048	208	47 1/4	13.6
AALUX112062	600/450	2048	240/208	47 1/4	13.6
AALUX112067	600	2048	277	47 1/4	13.6
AALUX115078	750	2560	208	59 1/16	16.8
AALUX115072	750/563	2560	240/208	59 1/16	16.8
AALUX115077	750	2560	277	59 1/16	16.8
AALUX115075	750	2560	480	59 1/16	16.8
AALUX118098	900	3071	208	70 7/8	20.0
AALUX118092	900/675	3071	240/208	70 7/8	20.0
AALUX118097	900	3071	277	70 7/8	20.0
AALUX118095	900	3071	480	70 7/8	20.0
AALUX121108	1050	3583	208	82 11/16	23.1
AALUX121102	1050/788	3583	240/208	82 11/16	23.1
AALUX121107	1050	3583	277	82 11/16	23.1
AALUX121105	1050	3583	480	82 11/16	23.1
AALUX124128	1200	4095	208	94 1/2	26.7
AALUX124122	1200/900	4095	240/208	94 1/2	26.7
AALUX124127	1200	4095	277	94 1/2	26.7
AALUX124125	1200	4095	480	94 1/2	26.7
AALUX127148	1350	4607	208	106 5/16	26.7
AALUX127142	1350/1013	4607	240/208	106 5/16	26.7
AALUX127147	1350	4607	277	106 5/16	26.7
AALUX127145	1350	4607	480	106 5/16	26.7

Add W for white, SW for silica white or CA for clear anodized (finish) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

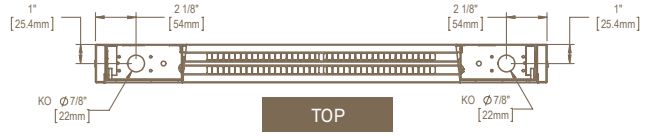

TOP

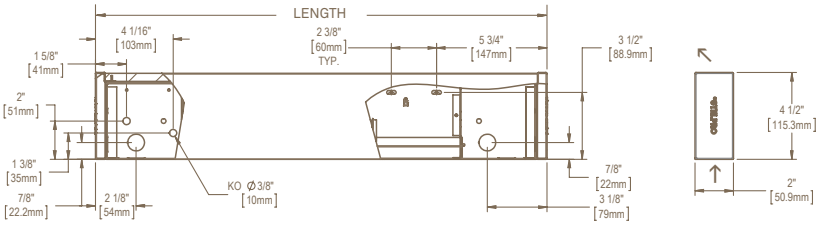

FRONT

SIDE

MINI ARCHITECTURAL BASEBOARD

ALUMINUM - AALUX2 SERIES

ALUX™ SERIES | SÉRIE

STYLE AND DURABILITY AT YOUR FEET

Here is a mini architectural baseboard you will not soon forget: the AALUX2 from the ALUX™ series, designed to be installed below large windows, patio doors or bay windows. In addition to not cluttering the room, it controls cold air infiltration and condensation due to its ability to act as a hot air curtain. Its unique style and aluminum extrusion not only make it durable but also ensures it complements any room.

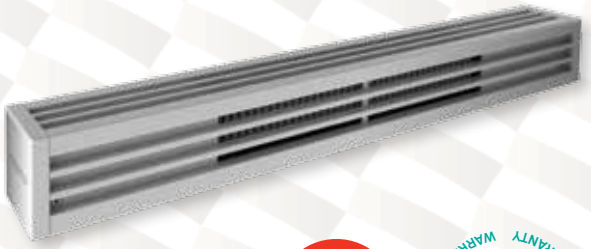

NEW PRODUCT

3 YEAR WARRANTY

EXTRUDED ALUMINUM FRONT COVER WITH A UNIQUE AND LUXURIOUS DESIGN

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

NEW STYLISH WHITE SATIN FINISH

NO CONDENSATION BUILD-UP
ELIMINATES ANY CONDENSATION BUILD-UP

BLANK SECTIONS AVAILABLE
FOR A CONTINUOUS EFFECT

IDEAL FOR:
BELOW LARGE WINDOWS, PATIO DOORS OR BAY WINDOWS, OFFICES, SOLARIUMS

ACCESSORIES

PRODUCT	DESCRIPTION
ALUX2T12*	built-in tamper-proof single pole thermostat
ALUX2RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
ALUX2RE156*	built-in electronic low voltage relay [6 A @ 600 V]
ALUX2RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
ALUX2DIS277*	disconnect switch [120 V-277 V]
ALUX2DIS600*	disconnect switch [347 V-600 V]
PK5*	pedestal kit - single (kit of two)
PK5D*	pedestal kit - double (kit of two)
ALUX2JS*	joiner strip (2 in.)
ALUX2IC90*	inside corner (back measures 6 1/2 in. long on each side)
ALUX2OC90*	outside corner (back measures 6 1/2 in. long on each side)
ALUX2CB**	clean back (fully finished, no mounting holes or knockouts)
ALUX2SA*	full width flush fit stand - height of 2 to 12 in.
ALUX2SR*	full width recessed stand (39/64 in.) - height of 2 in.

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal
* Add W for white, SW for silica white or CAP for clear anodised (paint)
* Add W for white, SW for silica white or CA for clear anodised (finish)
* Factory installed

NOT FOR RESIDENTIAL USE

COLORS
- standard: white, silica white
- luxurious finish: clear anodized (surcharge)
- optional: almond, black, textured charcoal, dark brown

FINISH
epoxy-polyester powdercoat or clear anodized finish

MANUFACTURING
- 3 in. x 3 in. compact profile
- solid 20-gauge steel cabinet
- extremely resistant extruded aluminum front cover with a thickness equivalent to 10 gauge
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings less than 1/4 in. prevent foreign objects from entering the unit

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left junction box only (optional)

INSTALLATION
- surface mounted
- wall or floor mounted with pedestal kit (optional)
- wiring compartment at both ends of unit
- for a continuous effect, custom blank sections with a simple attach system are available (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

150 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	VOLTS	IN.	LB
AALUX206031	300	1024	120	23 5/8	5.2
AALUX206038	300	1024	208	23 5/8	5.2
AALUX206032	300	1024	240	23 5/8	5.2
AALUX209041	450	1536	120	35 7/16	7.8
AALUX209048	450	1536	208	35 7/16	7.8
AALUX209042	450	1536	240	35 7/16	7.8
AALUX209043	450	1536	277	35 7/16	7.8
AALUX212061	600	2048	120	47 1/4	10.4
AALUX212068	600	2048	208	47 1/4	10.4
AALUX212062	600	2048	240	47 1/4	10.4
AALUX212067	600	2048	277	47 1/4	10.4
AALUX215071	750	2560	120	59 1/16	13
AALUX215078	750	2560	208	59 1/16	13
AALUX215072	750	2560	240	59 1/16	13
AALUX215077	750	2560	277	59 1/16	13
AALUX215075	750	2560	480	59 1/16	13
AALUX218091	900	3071	120	70 7/8	15.5
AALUX218098	900	3071	208	70 7/8	15.5
AALUX218092	900	3071	240	70 7/8	15.5
AALUX218097	900	3071	277	70 7/8	15.5
AALUX218095	900	3071	480	70 7/8	15.5
AALUX221101	1050	3583	120	82 11/16	18.1
AALUX221108	1050	3583	208	82 11/16	18.1
AALUX221102	1050	3583	240	82 11/16	18.1
AALUX221107	1050	3583	277	82 11/16	18.1
AALUX221105	1050	3583	480	82 11/16	18.1
AALUX224121	1200	4095	120	94 1/2	20.7
AALUX224128	1200	4095	208	94 1/2	20.7
AALUX224122	1200	4095	240	94 1/2	20.7
AALUX224127	1200	4095	277	94 1/2	20.7
AALUX224125	1200	4095	480	94 1/2	20.7
AALUX227138	1350	4607	208	106 5/16	23.3
AALUX227132	1350	4607	240	106 5/16	23.3
AALUX227137	1350	4607	277	106 5/16	23.3
AALUX227135	1350	4607	480	106 5/16	23.3

Add W for white, SW for silica white or CA for clear anodized (finish) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

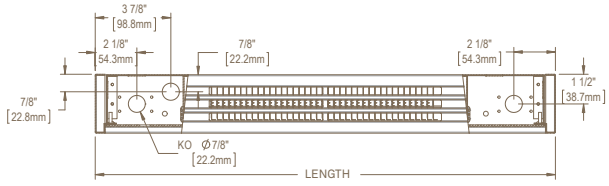

TOP

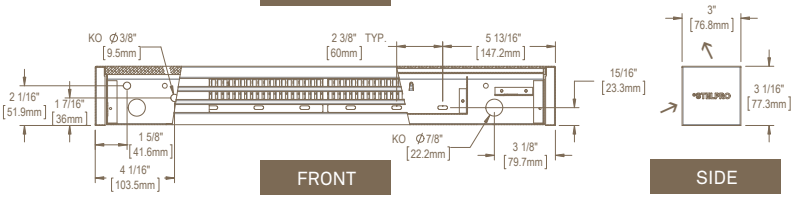

FRONT

SIDE

ARCHITECTURAL BASEBOARD

ALUMINUM - AALUX3 SERIES

ALUX™ SERIES | SÉRIE

THE ARCHITECTS' CHOICE

When it comes to aesthetics, the AALUX3 is the heating unit of choice. The AALUX3 features a winning combination of style and functionality with its extruded aluminum finish and its choice of watt densities. The AALUX3 is practically indestructible due to the quality of construction of its aluminum front panel with a thickness equivalent to 10 gauge. What's more, it offers the option of adding blank sections for a seamless, uniform look. Offices, large windows and schools can all benefit from the special features of this baseboard heater.

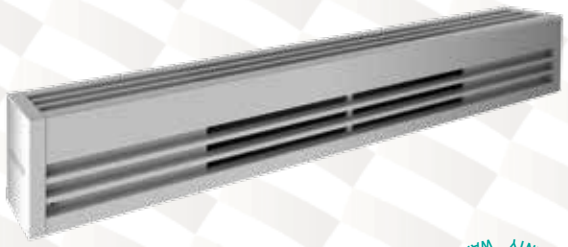

NEW PRODUCT

3 YEAR WARRANTY

EXTRUDED ALUMINUM FRONT COVER WITH A UNIQUE AND LUXURIOUS DESIGN

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

THREE WATT DENSITIES OFFERED

NEW STYLISH WHITE SATIN FINISH

PERSONALIZED INSTALLATION
BLANK SECTIONS, PEDESTALS AND CLEAN BACKS AVAILABLE

IDEAL FOR:
OFFICES, BUSINESSES, HOTELS, LOBBIES, LARGE WINDOWS, SCHOOLS, HOSPITALS

ACCESSORIES

PRODUCT	DESCRIPTION
ALUX3T12*	built-in tamper-proof single pole thermostat
ALUX3T22*	built-in tamper-proof double pole thermostat
ALUX3RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
ALUX3RE156*	built-in electronic low voltage relay [6 A @ 600 V]
ALUX3RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
ALUX3R841C1151*	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]
ALUX3DIS277*	disconnect switch [120 V-277 V]
ALUX3DIS600*	disconnect switch [347 V-600 V]
PK5*	pedestal kit - single (kit of two)
PK5D*	pedestal kit - double (kit of two)
ALUX3JS*	joiner strip (2 in.)
ALUX3IC90*	inside corner (back measures 6 1/2 in. long on each side)
ALUX3OC90*	outside corner (back measures 6 1/2 in. long on each side)
ALUX3CB**	clean back (fully finished, no mounting holes or knockouts)
ALUX3SA*	full width flush fit stand - height of 2 to 12 in.
ALUX3SR*	full width recessed stand (39/64 in.) - height of 2 in.

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal
* Add W for white, SW for silica white or CAP for clear anodised (paint)
* Add W for white, SW for silica white or CA for clear anodised (finish)
* Factory installed

NOT FOR RESIDENTIAL USE

COLORS
- standard: white, silica white
- luxurious finish: clear anodized (surcharge)
- optional: almond, black, textured charcoal, dark brown

FINISH
epoxy-polyester powdercoat or clear anodized finish

MANUFACTURING
- 3 in. x 4 in. compact profile
- solid 20-gauge steel cabinet
- extremely resistant extruded aluminum front cover with a thickness equivalent to 10 gauge
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings less than 1/4 in. prevent foreign objects from entering the unit

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left junction box only (optional)

INSTALLATION
- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- for a continuous effect, custom blank sections with a simple attach system are available (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 250 W PER LINEAR FOOT			MEDIUM DENSITY 200 W PER LINEAR FOOT			LOW DENSITY 150 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
AALUX306051	500	1024	**AALUX36041**	400	1365	**AALUX36031**	300	1024	120	23 5/8	6.7
AALUX306058	500	1024	**AALUX36048**	400	1365	**AALUX36038**	300	1024	208	23 5/8	6.7
AALUX306052	500	1024	**AALUX36042**	400	1365	**AALUX36032**	300	1024	240	23 5/8	6.7
AALUX306057	500	1024	---	400	1365	---	300	1024	277	23 5/8	6.7
AALUX309071	750	2560	**AALUX39061**	600	2048	**AALUX39041**	450	1536	120	35 7/16	10.1
AALUX309078	750	2560	**AALUX39068**	600	2048	**AALUX39048**	450	1536	208	35 7/16	10.1
AALUX309072	750	2560	**AALUX39062**	600	2048	**AALUX39042**	450	1536	240	35 7/16	10.1
AALUX309077	750	2560	**AALUX39067**	600	2048	**AALUX39047**	450	1536	277	35 7/16	10.1
AALUX309075	750	2560	---	600	2048	---	450	1536	480	35 7/16	10.1
AALUX312101	1000	3413	**AALUX312081**	800	2730	**AALUX312061**	600	2048	120	47 1/4	13.4
AALUX312108	1000	3413	**AALUX312088**	800	2730	**AALUX312068**	600	2048	208	47 1/4	13.4
AALUX312102	1000	3413	**AALUX312082**	800	2730	**AALUX312062**	600	2048	240	47 1/4	13.4
AALUX312107	1000	3413	**AALUX312087**	800	2730	**AALUX312067**	600	2048	277	47 1/4	13.4
AALUX312105	1000	3413	**AALUX312085**	800	2730	---	600	2048	480	47 1/4	13.4
AALUX315121	1250	4266	**AALUX315101**	1000	3413	**AALUX315071**	750	2560	120	59 1/16	16.8
AALUX315128	1250	4266	**AALUX315108**	1000	3413	**AALUX315078**	750	2560	208	59 1/16	16.8
AALUX315122	1250	4266	**AALUX315102**	1000	3413	**AALUX315072**	750	2560	240	59 1/16	16.8
AALUX315127	1250	4266	**AALUX315107**	1000	3413	**AALUX315077**	750	2560	277	59 1/16	16.8
AALUX315125	1250	4266	**AALUX315105**	1000	3413	**AALUX315075**	750	2560	480	59 1/16	16.8
AALUX318151	1500	5119	**AALUX318121**	1200	4095	**AALUX318091**	900	3071	120	70 7/8	20.1
AALUX318158	1500	5119	**AALUX318128**	1200	4095	**AALUX318098**	900	3071	208	70 7/8	20.1
AALUX318152	1500	5119	**AALUX318122**	1200	4095	**AALUX318092**	900	3071	240	70 7/8	20.1
AALUX318157	1500	5119	**AALUX318127**	1200	4095	**AALUX318097**	900	3071	277	70 7/8	20.1
AALUX318155	1500	5119	**AALUX318125**	1200	4095	**AALUX318095**	900	3071	480	70 7/8	20.1
---	1750	5972	**AALUX321141**	1400	4778	**AALUX321101**	1050	3583	120	82 11/16	23.4
AALUX321178	1750	5972	**AALUX321148**	1400	4778	**AALUX321108**	1050	3583	208	82 11/16	23.4
AALUX321172	1750	5972	**AALUX321142**	1400	4778	**AALUX321102**	1050	3583	240	82 11/16	23.4
AALUX321177	1750	5972	**AALUX321147**	1400	4778	**AALUX321107**	1050	3583	277	82 11/16	23.4
AALUX321175	1750	5972	**AALUX321145**	1400	4778	**AALUX321105**	1050	3583	480	82 11/16	23.4
---	2000	6825	---	1600	5460	**AALUX324121**	1200	4095	120	94 1/2	26.8
AALUX324208	2000	6825	**AALUX324168**	1600	5460	**AALUX324128**	1200	4095	208	94 1/2	26.8
AALUX324202	2000	6825	**AALUX324162**	1600	5460	**AALUX324122**	1200	4095	240	94 1/2	26.8
AALUX324207	2000	6825	**AALUX324167**	1600	5460	**AALUX324127**	1200	4095	277	94 1/2	26.8
AALUX324205	2000	6825	**AALUX324165**	1600	5460	**AALUX324125**	1200	4095	480	94 1/2	26.8
AALUX327228	2250	7679	**AALUX327188**	1800	6143	**AALUX327138**	1350	4607	208	106 5/16	30.1
AALUX327222	2250	7679	**AALUX327182**	1800	6143	**AALUX327132**	1350	4607	240	106 5/16	30.1
AALUX327227	2250	7679	**AALUX327187**	1800	6143	**AALUX327137**	1350	4607	277	106 5/16	30.1
AALUX327225	2250	7679	**AALUX327185**	1800	6143	**AALUX327135**	1350	4607	480	106 5/16	30.1
AALUX327258	2500	8532	**AALUX327208**	2000	6825	**AALUX327158**	1500	5119	208	106 5/16	30.1
AALUX327252	2500	8532	**AALUX327202**	2000	6825	**AALUX327152**	1500	5119	240	106 5/16	30.1
AALUX327257	2500	8532	**AALUX327207**	2000	6825	**AALUX327157**	1500	5119	277	106 5/16	30.1
AALUX327255	2500	8532	**AALUX327205**	2000	6825	**AALUX327155**	1500	5119	480	106 5/16	30.1

Add W for white, SW for silica white or CA for clear anodized (finish) (consult the optional colors chart or contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

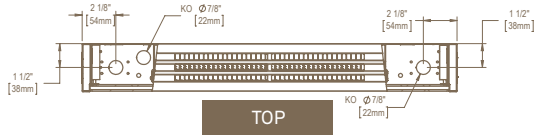

TOP

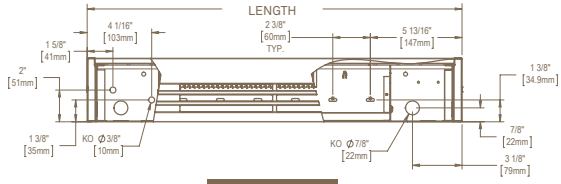

FRONT



SIDE

ARCHITECTURAL BASEBOARD

ALUMINUM - AALUX4 SERIES

ALUX™ SERIES | SÉRIE

NEW PRODUCT

3 YEAR WARRANTY

A HEATER WITH A LOT TO OFFER

The AALUX4 is an impressive blend of contemporary design and superior performance. Its durable steel cabinet is decorated with an elegant aluminum grille and offers a remarkable heat density of 500 W per linear foot. Its unique airflow configuration compliments its appearance making it the leader in its class and a popular choice for professionals in the industry.

EXTRUDED ALUMINUM FRONT COVER WITH A UNIQUE AND LUXURIOUS DESIGN

EXTREMELY SOLID, IMPACT AND RUST RESISTANT

THREE WATT DENSITIES OFFERED

NEW STYLISH WHITE SATIN FINISH

PERSONALIZED INSTALLATION
BLANK SECTIONS, PEDESTALS AND CLEAN BACKS AVAILABLE

IDEAL FOR:
SHOPPING MALLS, HOSPITALS, OFFICES, HOTELS, LOBBIES, HALLWAYS

ACCESSORIES

PRODUCT	DESCRIPTION
ALUX4T12*	built-in tamper-proof single pole thermostat
ALUX4T22*	built-in tamper-proof double pole thermostat
ALUX4RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
ALUX4RE156*	built-in electronic low voltage relay [6 A @ 600 V]
ALUX4RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
ALUX4R841C1169*	built-in mechanical low voltage relay c/w transformer 24 V [5000 W @ 208 V/6000 W @ 240 V]
ALUX4R841C1144*	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 347 V]
ALUX4R841C1151*	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]
ALUX4R841D1036*	built-in mechanical low voltage relay w/o transformer 24 V [6000 W @ 120 V-600 V]
ALUX4DIS277*	disconnect switch [120 V-277 V]
ALUX4DIS600*	disconnect switch [347 V-600 V]
PK6*	pedestal kit - single (kit of two)
PK6D*	pedestal kit - double (kit of two)
ALUX4JS*	joiner strip (2 in.)
ALUX4IC90*	inside corner (back measures 8 3/4 in. long on each side)
ALUX4OC90*	outside corner (back measures 8 3/4 in. long on each side)
ALUX4CB**	clean back (fully finished, no mounting holes or knockouts)
ALUX4BT*	air inlet from below/output from top
ALUX4SA*	full width flush fit stand - height of 2 to 12 in
ALUX4SR*	full width recessed stand (19/32 in.) - height of 2 in.

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal
* Add W for white, SW for silica white or CAP for clear anodised (paint)
* Add W for white, SW for silica white or CA for clear anodised (finish)
* Factory installed

NOT FOR RESIDENTIAL USE

COLORS
- standard: white, silica white
- luxurious finish: clear anodized (surcharge)
- optional: almond, black, textured charcoal, dark brown

FINISH
epoxy-polyester powdercoat or clear anodized finish

MANUFACTURING
- dimensions: 4 3/8 in. x 6 3/4 in.
- solid 20-gauge steel cabinet and extremely resistant extruded aluminum front cover with a thickness equivalent to 10 gauge
- front air intake and top air discharge (bottom air intake available on demand [BT])
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings less than 1/4 in. prevent foreign objects from entering the unit

ELEMENTS
double tubular elements, stainless steel sheathed with boxed aluminum fins for improved heat dissipation; the elements are securely fastened at their centers, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION
- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- at least 3 in. from the floor ([BT] models only)
- wiring compartments at both ends of unit
- for a continuous effect, custom blank sections with a simple attach system are available (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 500 W PER LINEAR FOOT			MEDIUM DENSITY 400 W PER LINEAR FOOT			LOW DENSITY 300 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
AALUX406108	1000	3413	**AALUX46088**	800	2730	**AALUX46068**	600	2048	208	23 5/8	9
AALUX406102	1000	3413	**AALUX46082**	800	2730	**AALUX46062**	600	2048	240	23 5/8	9
AALUX406107	1000	3413	**AALUX46087**	800	2730	**AALUX46067**	600	2048	277	23 5/8	9
AALUX409158	1500	5119	**AALUX49128**	1200	4095	**AALUX49098**	900	3071	208	35 7/16	13
AALUX409152	1500	5119	**AALUX49122**	1200	4095	**AALUX49092**	900	3071	240	35 7/16	13
AALUX409157	1500	5119	**AALUX49127**	1200	4095	**AALUX49097**	900	3071	277	35 7/16	13
AALUX409155	1500	5119	---	1200	4095	---	900	3071	480	35 7/16	13
AALUX412208	2000	6825	**AALUX412168**	1600	5460	**AALUX412128**	1200	4095	208	47 1/4	17
AALUX412202	2000	6825	**AALUX412162**	1600	5460	**AALUX412122**	1200	4095	240	47 1/4	17
AALUX412207	2000	6825	**AALUX412167**	1600	5460	**AALUX412127**	1200	4095	277	47 1/4	17
AALUX412205	2000	6825	**AALUX412165**	1600	5460	---	1200	4095	480	47 1/4	17
AALUX415258	2500	8532	**AALUX415208**	2000	6825	**AALUX415158**	1500	5119	208	59 1/16	20
AALUX415252	2500	8532	**AALUX415202**	2000	6825	**AALUX415152**	1500	5119	240	59 1/16	20
AALUX415257	2500	8532	**AALUX415207**	2000	6825	**AALUX415157**	1500	5119	277	59 1/16	20
AALUX415255	2500	8532	**AALUX415205**	2000	6825	**AALUX415155**	1500	5119	480	59 1/16	20
AALUX418308	3000	10238	**AALUX418248**	2400	8190	**AALUX418188**	1800	6143	208	70 7/8	25
AALUX418302	3000	10238	**AALUX418242**	2400	8190	**AALUX418182**	1800	6143	240	70 7/8	25
AALUX418307	3000	10238	**AALUX418247**	2400	8190	**AALUX418187**	1800	6143	277	70 7/8	25
AALUX418305	3000	10238	**AALUX418245**	2400	8190	**AALUX418185**	1800	6143	480	70 7/8	25
AALUX421358	3500	11944	**AALUX421288**	2800	9556	**AALUX421218**	2100	7167	208	82 11/16	29
AALUX421352	3500	11944	**AALUX421282**	2800	9556	**AALUX421212**	2100	7167	240	82 11/16	29
AALUX421357	3500	11944	**AALUX421287**	2800	9556	**AALUX421217**	2100	7167	277	82 11/16	29
AALUX421355	3500	11944	**AALUX421285**	2800	9556	**AALUX421215**	2100	7167	480	82 11/16	29
AALUX424408	4000	13651	**AALUX424328**	3200	10921	**AALUX424248**	2400	8190	208	94 1/2	34
AALUX424402	4000	13651	**AALUX424322**	3200	10921	**AALUX424242**	2400	8190	240	94 1/2	34
AALUX424407	4000	13651	**AALUX424327**	3200	10921	**AALUX424247**	2400	8190	277	94 1/2	34
AALUX424405	4000	13651	**AALUX424325**	3200	10921	**AALUX424245**	2400	8190	480	94 1/2	34

Add W for white, SW for silica white or CA for clear anodized (finish) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

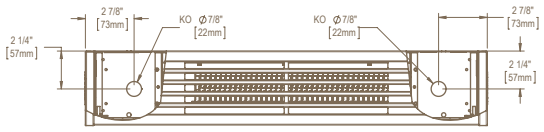

TOP

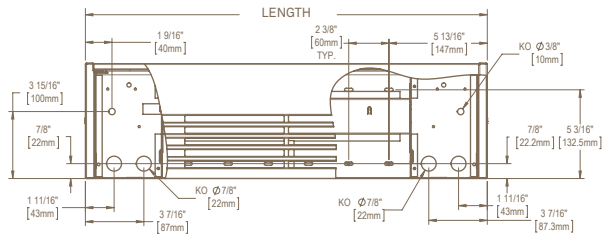

FRONT



SIDE

ALUX™
SERIES | SÉRIE

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

OPTIONS

DOUBLE PEDESTAL

BLANK SECTIONS
COMES WITH A SIMPLE ATTACH SYSTEM

FULL WIDTH STAND
(FLUSH FIT OR RECESSED)

INSIDE AND OUTSIDE CORNERS

CLEAN BACK - FULLY FINISHED
(NO MOUNTING HOLES OR KNOCKOUTS)

ALUMINUM DRAFT BARRIER

DBI SERIES

DESIGN AND FUNCTIONALITY COMBINED

Designers, architects and decor afficionados alike will appreciate this electric baseboard heater whose clean, unobtrusive lines make it a heating showpiece. It can be wall mounted, placed on the floor or installed on pedestals. Consider the DBI for use in offices, conference rooms, entryways, commercial buildings, schools or hospitals. Enjoy the benefits of heating efficiency without sacrificing aesthetics.

3 YEAR WARRANTY

HIGH-QUALITY ALUMINUM
EXTRUDED ALUMINUM GRILLE WITH A THICKNESS EQUIVALENT TO 11 GAUGE

THREE WATT DENSITIES OFFERED

COMPACT SIZE, INNOVATIVE DESIGN

BLANK SECTIONS AVAILABLE
FOR A CONTINUOUS EFFECT

IDEAL FOR:
OFFICES, ENTRYWAYS, BUSINESSES, SCHOOLS, HOSPITALS

ACCESSORIES

PRODUCT	DESCRIPTION
DBIT12*	built-in tamper-proof single pole thermostat
DBIT22*	built-in tamper-proof double pole thermostat
DBIT12-BOUTON*	built-in single pole thermostat with knob
DBIRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
DBIRE156*	built-in electronic low voltage relay [6 A @ 600 V]
DBIRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
DBIDIS277*	disconnect switch [120 V-277 V]
DBIDIS600*	disconnect switch [347 V-600 V]
PK1*	pedestal kit (kit of two)
PK1CAP	clear anodized (paint) pedestal kit (kit of two)
DBIJS*	joiner strip (2 in.)
DBIJSCAP	clear anodized (paint) joiner strip (2 in.)
DBIIC90*	inside corner (back measures 5 7/8 in. long on each side)
DBIIC90CA	clear anodized (finish) inside corner (back measures 5 7/8" long on each side)
DBIOC90*	outside corner (back measures 5 7/8 in. long on each side)
DBIOC90CA	clear anodized (finish) outside corner (back measures 5 7/8 in. long on each side)
DBICB**	clean back (fully finished, no mounting holes or knockouts)
DBICBCAP *	clear anodized (paint) clean back (fully finished, no mounting holes or knockouts)
DBIBT*	bottom air intake/top air discharge

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.
* Add W for white or SW for silica white
* Factory installed
* Factory installation is strongly recommended

COLORS
- standard: white, silica white
- luxurious finish: clear anodized (surcharge)
- optional: almond, black, textured charcoal, dark brown

FINISH
epoxy-polyester powdercoat or clear anodized finish

MANUFACTURING
- 18-gauge steel cabinet
- extruded aluminum front panel with a thickness equivalent to 11 gauge
- front air intake and top air discharge (bottom air intake available on demand [BT])
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings less than 1/4 in. prevent foreign objects from entering the unit

ELEMENT
single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left or right junction box (optional)
- built-in thermostat with button installed in the left junction box only (optional)

INSTALLATION
- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- blank sections (custom lengths) and accessories are available for a continuous effect (optional)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 250 W PER LINEAR FOOT			MEDIUM DENSITY 200 W PER LINEAR FOOT			LOW DENSITY 150 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
DBI6051	500	1706	**DBI6041**	400	1365	**DBI6031**	300	1024	120	23 5/8	6.7
DBI6058	500	1706	**DBI6048**	400	1365	**DBI6038**	300	1024	208	23 5/8	6.7
DBI6052	500	1706	**DBI6042**	400	1365	**DBI6032**	300	1024	240	23 5/8	6.7
DBI6057	500	1706	---	400	1365	---	300	1024	277	23 5/8	6.7
DBI9071	750	2560	**DBI9061**	600	2048	**DBI9041**	450	1536	120	35 7/16	10.1
DBI9078	750	2560	**DBI9068**	600	2048	**DBI9048**	450	1536	208	35 7/16	10.1
DBI9072	750	2560	**DBI9062**	600	2048	**DBI9042**	450	1536	240	35 7/16	10.1
DBI9077	750	2560	**DBI9067**	600	2048	**DBI9047**	450	1536	277	35 7/16	10.1
DBI12101	1000	3413	**DBI12081**	800	2730	**DBI12061**	600	2048	120	47 1/4	13.4
DBI12108	1000	3413	**DBI12088**	800	2730	**DBI12068**	600	2048	208	47 1/4	13.4
DBI12102	1000	3413	**DBI12082**	800	2730	**DBI12062**	600	2048	240	47 1/4	13.4
DBI12107	1000	3413	**DBI12087**	800	2730	**DBI12067**	600	2048	277	47 1/4	13.4
DBI15121	1250	4266	**DBI15101**	1000	3413	**DBI15071**	750	2560	120	59 1/16	16.8
DBI15128	1250	4266	**DBI15108**	1000	3413	**DBI15078**	750	2560	208	59 1/16	16.8
DBI15122	1250	4266	**DBI15102**	1000	3413	**DBI15072**	750	2560	240	59 1/16	16.8
DBI15127	1250	4266	**DBI15107**	1000	3413	**DBI15077**	750	2560	277	59 1/16	16.8
DBI15125	1250	4266	**DBI15105**	1000	3413	**DBI15075**	750	2560	480	59 1/16	16.8
DBI18151	1500	5119	**DBI18121**	1200	4095	**DBI18091**	900	3071	120	70 7/8	20.1
DBI18158	1500	5119	**DBI18128**	1200	4095	**DBI18098**	900	3071	208	70 7/8	20.1
DBI18152	1500	5119	**DBI18122**	1200	4095	**DBI18092**	900	3071	240	70 7/8	20.1
DBI18157	1500	5119	**DBI18127**	1200	4095	**DBI18097**	900	3071	277	70 7/8	20.1
DBI18155	1500	5119	**DBI18125**	1200	4095	**DBI18095**	900	3071	480	70 7/8	20.1
---	1750	5972	**DBI21141**	1400	4778	**DBI21101**	1050	3583	120	82 11/16	23.4
DBI21178	1750	5972	**DBI21148**	1400	4778	**DBI21108**	1050	3583	208	82 11/16	23.4
DBI21172	1750	5972	**DBI21142**	1400	4778	**DBI21102**	1050	3583	240	82 11/16	23.4
DBI21177	1750	5972	**DBI21147**	1400	4778	**DBI21107**	1050	3583	277	82 11/16	23.4
DBI21175	1750	5972	**DBI21145**	1400	4778	**DBI21105**	1050	3583	480	82 11/16	23.4
---	2000	6825	---	1600	5460	**DBI24121**	1200	4095	120	94 1/2	26.8
DBI24208	2000	6825	**DBI24168**	1600	5460	**DBI24128**	1200	4095	208	94 1/2	26.8
DBI24202	2000	6825	**DBI24162**	1600	5460	**DBI24122**	1200	4095	240	94 1/2	26.8
DBI24207	2000	6825	**DBI24167**	1600	5460	**DBI24127**	1200	4095	277	94 1/2	26.8
DBI24205	2000	6825	**DBI24165**	1600	5460	**DBI24125**	1200	4095	480	94 1/2	26.8
DBI27228	2250	7679	**DBI27188**	1800	6143	**DBI27138**	1350	4607	208	106 5/16	30.1
DBI27222	2250	7679	**DBI27182**	1800	6143	**DBI27132**	1350	4607	240	106 5/16	30.1
DBI27227	2250	7679	**DBI27187**	1800	6143	**DBI27137**	1350	4607	277	106 5/16	30.1
DBI27225	2250	7679	**DBI27185**	1800	6143	**DBI27135**	1350	4607	480	106 5/16	30.1
DBI27258	2500	8532	**DBI27208**	2000	6825	**DBI27158**	1500	5119	208	106 5/16	30.1
DBI27252	2500	8532	**DBI27202**	2000	6825	**DBI27152**	1500	5119	240	106 5/16	30.1
DBI27257	2500	8532	**DBI27207**	2000	6825	**DBI27157**	1500	5119	277	106 5/16	30.1
DBI27255	2500	8532	**DBI27205**	2000	6825	**DBI27155**	1500	5119	480	106 5/16	30.1

Add W for white or SW for silica white or CA for clear anodized (finish) (see page 10 for optional colors and contact your °STELPRO representative for all other colors)
--- not available

TECHNICAL DRAWINGS

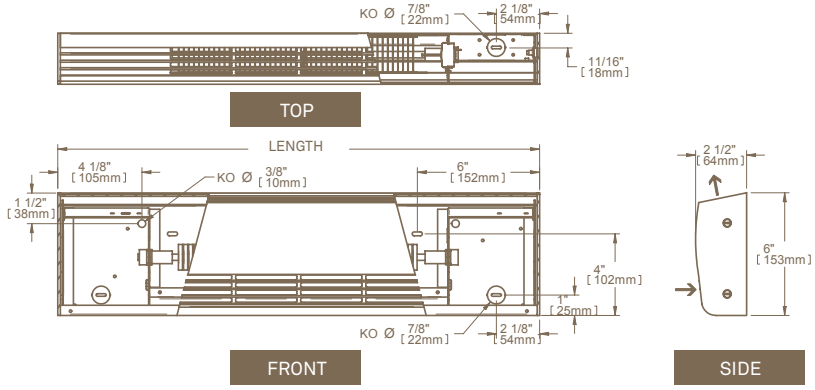

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

SPECIALTY HEATERS

ASHCB SERIES
BATHROOM FAN HEATER

ASIL2030 SERIES
BATHROOM FAN HEATER *Silhouette*™

FFI SERIES
FLOOR INSERT FAN HEATER

SPDH SERIES
MINI PATIO DOOR HEATER

PDH SERIES
PATIO DOOR HEATER

FOR MORE INFORMATION REGARDING THESE PRODUCT LINES, PLEASE VISIT OUR WEBSITE

STELPRO.COM

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

CONVECTORS AND CABINET CONVECTORS

SCA SERIES
ARCHITECTURAL BASEBOARD

SCAS SERIES
SLOPED ARCHITECTURAL BASEBOARD

CBB SERIES
SLOPED COMMERCIAL BASEBOARD

CBF SERIES
COMMERCIAL BASEBOARD

CW750 SERIES
ARCHITECTURAL CABINET

CWS750 SERIES
SLOPED ARCHITECTURAL CABINET

CW1000 SERIES
ARCHITECTURAL CABINET

CWS1000 SERIES
SLOPED ARCHITECTURAL CABINET

THERMOSTATS

CLASSICAL COMFORT
AT YOUR FINGERTIPS

ELECTRONIC THERMOSTAT

STZW402 (Z-WAVE) / STZB402 (ZIGBEE) SERIES

FOR SMART HOME | **4000 W**

KI™

COMFORT AT YOUR FINGERTIPS

The KI™ thermostat for the smart home is the first ever Z-Wave line voltage thermostat in North America. KI™ thermostats can easily be integrated into the Z-Wave or ZigBee network of your home, allowing you to adjust the temperature in rooms of your home from a distance. The Z-Wave or ZigBee technology also allows you to activate scenes, setting in motion several actions such as adjusting the temperature and lighting, activation of safety and entertainment systems and more.

NEW PRODUCT

ECOLOGICAL ENERGY

3 YEAR WARRANTY

Z-WAVE® COMPATIBLE
STZW402

ZigBee® COMPATIBLE
STZB402

CONTROL WITH YOUR SMARTPHONE, TABLET OR COMPUTER

ENERGY MANAGEMENT MODES
FOR INCREASED ENERGY EFFICIENCY

PERSONALIZED SCENE ACTIVATION
INTEGRATES EASILY INTO THE SMART HOME

MORE THAN 30%

CONSUMPTION SAVINGS
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COMPATIBILITY
- **Z-Wave controller required or ZigBee gateway required**
- Z-Wave Plus certified and ZigBee certified: works with thousands of other Z-Wave or ZigBee devices

COLOR
white

FINISH
molded plastic

WATTAGE & VOLTAGE
150 W to 2000 W @ 120 V / 300 W to 4000 W @ 240 V

CONTROL
- 2-wire connection to heater
- simple programming
- display outdoor temperature*
- STZW402 is not compatible with forced-air units
- frost-free warning
- display in either Fahrenheit or Celsius
- backlit screen with adjustable intensity
- activate several other functions

ACCURACY
accurate ambient temperature control of 0.18 °F

TEMPERATURE RANGE
from 41 to 86 °F

* depending on the central controller and its application

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	COLOR	PACKAGING
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ		
STZW402WB+ (Z-WAVE)	150/300	2000/4000	120/240	16.7	50/60	WHITE	BOX
STBW402WB+ (ZIGBEE)	150/300	2000/4000	120/240	16.7	50/60	WHITE	BOX

DIMENSIONS : width of 4 7/8 in., height of 4 7/8 in. and depth of 1 3/8 in.

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ENERGY VERIFIED

ELECTRONIC THERMOSTAT

STE252NP SERIES

1 SINGLE PROGRAMMING | 2500 W

SMALL, PRACTICAL AND EFFICIENT!

The new °STELPRO STE252NP single programming electronic thermostat is the thermostat of choice if you don't need more than a 2500 W capacity. It can control electronic convectors, electric baseboards and other heating units (including forced-air units) with precision. Good for small and medium-sized rooms such as the livingroom, the kitchen, the bedroom and the bathroom.

NEW PRODUCT

ECOLOGICAL ENERGY

3 YEAR WARRANTY

SIMPLE 4-STEP PROGRAMMING
LOWER THE TEMPERATURE AT NIGHT AND AUTOMATICALLY RETURN TO THE SELECTED TEMPERATURE DURING THE DAY

INCREASED SAVINGS AND COMFORT
± 0.1°F
INCOMPARABLE ACCURACY

BACKLIT SCREEN
MAY BE USED AS A NIGHTLIGHT

CONSUMPTION SAVINGS
MORE THAN 30%
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

WATTAGE & VOLTAGE
150 W to 1250 W @ 120 V / 260 W to 2160 W @ 208 V / 300 W to 2500 W @ 240 V

CONTROL
- 2-wire connection
- acts like a programmable thermostat by automatically lowering the temperature once per 24-hour period (Single programming mode)
- compatible with forced-air units (Fan mode)
- frost-free warning
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control of ± 0.18 °F

TEMPERATURE RANGE
between 37 to 86 °F

WALL SUPPORT (INCLUDED)
INDISPENSABLE WHEN REPLACING A MECHANICAL THERMOSTAT

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	PACKAGING
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
STE252NPWB+	150/260/300	1250/2160/2500	120/208/240	10.4	50/60	BOX

DIMENSIONS: width of 3 11/16 in., height of 4 7/8 in. and depth of 1 1/8 in.

ENERGY VERIFIED

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC THERMOSTAT

STE302NP-STE402NP SERIES

1 SINGLE PROGRAMMING

3000 W

4000 W

INSTALLATION AT YOUR FINGERTIPS!

Thanks to its innovative wall support, this thermostat is quick and easy to install. It can be used to control electric heating units with or without fans. It also allows you to lower the temperature at a specified time of the day to ensure absolute comfort, either during nighttime or business hours.

ECOLOGICAL ENERGY

3 YEAR WARRANTY

ALSO AVAILABLE: STE403NP - 277 V model

SIMPLE 4-STEP PROGRAMMING
LOWER THE TEMPERATURE AT NIGHT AND AUTOMATICALLY RETURN TO THE SELECTED TEMPERATURE DURING THE DAY

INCREASED SAVINGS AND COMFORT
INCOMPARABLE ACCURACY

BACKLIT SCREEN*
MAY BE USED AS A NIGHTLIGHT

CONSUMPTION SAVINGS
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

WATTAGE & VOLTAGE
STE302NP: 150 W to 1500 W @ 120 V / 260 W to 2600 W @ 208 V/ 300 W to 3000 W @ 240 V
STE402NP: 150 W to 2000 W @ 120 V / 260 W to 3475 W @ 208 V / 300 W to 4000 W @ 240 V

CONTROL
- 2-wire connection
- acts like a programmable thermostat by automatically lowering the temperature once per 24-hour period (Single programming mode)
- compatible with forced-air units (Fan mode)
- frost-free warning
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control of ± 0.18 °F

TEMPERATURE RANGE
between 37 to 86 °F

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	COLOR	PACKAGING
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ		
STE302NPWB+	150/260/300	1500/2600/3000	120/208/240	12.5	50/60	WHITE	BOX
STE402NPWB+	150/260/300	2000/3475/4000	120/208/240	16.7	50/60	WHITE	BOX
STE402NPSW+	150/260/300	2000/3475/4000	120/208/240	16.7	50/60	SILICA WHITE	CLAMSHELL
STE403NPW24	150/260/300/350/400	2000/3475/4000/4600/5750	120/208/240/277/347	16.7	50/60	WHITE	BOX

DIMENSIONS: width of 4 7/8 in., height of 4 7/8 in. and depth of 1 1/8 in. (STE403NP: width of 4 1/2 in., height of 4 7/8 in. and depth of 1 3/8 in.)

* Except STE403NP model

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ENERGY VERIFIED

ELECTRONIC THERMOSTAT

STE302P-STE402P SERIES

M MULTIPLE PROGRAMMING | 3000 W | 4000 W

THE SMART, EFFICIENT AND ECOLOGICAL CHOICE

Cost-saving programming, that's what the this thermostat has to offer. Life just got both simpler and more comfortable thanks to its Preprogrammed mode that allows you to easily and quickly program the desired temperature. Offering 18 predefined programs, the user can easy select among the most commonly used settings or program their own custom settings.

ECOLOGICAL ENERGY

3 YEAR WARRANTY

18 **EASY PROGRAMMING**
INCLUDES 18 PREPROGRAMMED PRESETS IN "PRE-PROG" MODE

±0.1°F **INCREASED SAVINGS AND COMFORT**
INCOMPARABLE ACCURACY

ANTICIPATED START
REACH THE SELECTED TEMPERATURE AT PRECISELY THE PROGRAMMED TIME

5-2 **5-2 DAY PROGRAMMING**

BACKLIT SCREEN
MAY BE USED AS A NIGHTLIGHT

MORE THAN 30% **CONSUMPTION SAVINGS**
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

WATTAGE & VOLTAGE
STE302P: 150 W to 1500 W @ 120 V / 260 W to 2600 W @ 208 V / 300 W to 3000 W @ 240 V

STE402P: 150 W to 2000 W @ 120 V / 260 W to 3475 W @ 208 V / 300 W to 4000 W @ 240 V

CONTROL
- 2-wire connection
- compatible with forced-air units (Fan mode)
- easily choose the desired preprogramming with one button
- able to program 4 periods a day during the week and 4 others per day during the weekend, for a maximum of 8/week
- anticipated start (the thermostat reaches the desired temperature at the requested hour)
- frost-free warning
- lock option at a minimum and maximum temperature set point (Security mode)
- protection against power failure (2 hours)
- the hour can be displayed in 12 or 24-hour mode
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control of ± 0.18 °F

TEMPERATURE RANGE
between 37 to 86 °F

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	PACKAGING
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
STE302PWB+	150/260/300	1500/2600/3000	120/208/240	12.5	50/60	BOX
STE402PWB+	150/260/300	2000/3475/4000	120/208/240	16.7	50/60	BOX

DIMENSIONS: width of 4 7/8 in., height of 4 7/8 in. and depth of 1 1/8 in.

ENERGY VERIFIED

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC THERMOSTAT

STCNP SERIES

1 SINGLE PROGRAMMING **3840 W**

CONTROL YOU CAN DEPEND ON TO HEAT YOUR FLOORS

A thermostat for heated floors that can control the temperature of a room through either the floor or the ambient air. Pressing any one of the buttons will turn the backlight on. The thermostat can be locked to prevent it from exceeding the selected temperature.

3 YEAR WARRANTY

SIMPLE 4-STEP PROGRAMMING
LOWER THE TEMPERATURE AT NIGHT AND AUTOMATICALLY RETURN TO THE SELECTED TEMPERATURE DURING THE DAY

INCREASED SAVINGS AND COMFORT
INCOMPARABLE ACCURACY

DOUBLE CONTROL: FLOOR OR AMBIENT TEMPERATURE (YOUR CHOICE)

BACKLIT SCREEN

COLOR
white

FINISH
molded plastic

MANUFACTURING
- built-in GFCI and pilot light (test)
- four wires/DPST with bipolar tripping
- 13 ft. floor sensor included*

WATTAGE & VOLTAGE
0 W to 1920 W @ 120 V / 0 W to 3330 W @ 208 V / 0 W to 3840 W @ 240 V

CONTROL
- acts like a programmable thermostat by automatically lowering the temperature once per 24-hour period (Single programming mode)
- advanced floor or ambient temperature control (your choice)
- protection against power failures (two hours)
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control of ± 0.27 °F

TEMPERATURE RANGE
- ambient mode: between 37 to 95 °F
- floor mode: between 37 to 82 °F

* The thermostat is compatible with floor sensors provided by certain other manufacturers

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI
CODE	MAXIMUM	VOLTS	AMPERES	HZ	MA
STCNPW5*	1920/3840	120/240	16	50/60	5

* 5 mA thermostats have an integral ground-fault circuit interrupter (GFCI) (mandatory in bathrooms and similar room types)
Please refer to the electrical and building codes in effect in your region in order to choose the best thermostat to suit your needs.
DIMENSIONS: width of 3 3/8 in., height of 4 7/8 in. and depth of 1 in. (total depth: 2 3/16 in.)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC THERMOSTAT

STCP SERIES

M MULTIPLE PROGRAMMING 3840 W

PROGRAMMING AT YOUR FEET

This thermostat, specifically designed for heated floor systems, allows the reading of the floor or ambient temperature. A booklet is provided containing more than 250 preprogrammings that can be set by simply pressing the front buttons. The STCP is like a small computer designed to provide maximum comfort.

3 YEAR WARRANTY

252 **EASY PROGRAMMING**
INCLUDES 252 PREPROGRAMMED PRESETS IN "PRE-PROG" MODE

±0.1°F **INCREASED SAVINGS AND COMFORT**
INCOMPARABLE ACCURACY

ANTICIPATED START
REACH THE SELECTED TEMPERATURE PRECISELY AT THE PROGRAMMED TIME

7 **7-DAY PROGRAMMING**

DOUBLE CONTROL: FLOOR OR AMBIENT TEMPERATURE (YOUR CHOICE)

BACKLIT SCREEN

COLOR
white

FINISH
molded plastic

MANUFACTURING
- built-in GFCI and pilot light (test)
- four wires/DPST with bipolar tripping
- 13 ft. floor sensor included*

WATTAGE & VOLTAGE
0 W to 1920 W @ 120 V / 0 W to 3330 W @ 208 V / 0 W to 3840 W @ 240 V

CONTROL
- program up to 4 periods a day
- anticipated start (the thermostat reaches the desired temperature at the requested hour)
- advanced floor or ambient temperature control (your choice)
- protection against power failures (two hours)
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control of ± 0.27 °F

TEMPERATURE RANGE
- ambient mode: between 37 to 95 °F
- floor mode: between 37 to 82 °F

* The thermostat is compatible with floor sensors provided by certain other manufacturers

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS	VOLTAGE	AMPERAGE	FREQUENCY	GFCI
CODE	MAXIMUM	VOLTS	AMPERES	HZ	MA
STCPW5*	1920/3840	120/240	16	50/60	5

* 5 mA thermostats have an integral ground-fault circuit interrupter (GFCI) (mandatory in bathrooms and similar room types)
Please refer to the electrical and building codes in effect in your region in order to choose the best thermostat to suit your needs.
DIMENSIONS: width of 3 3/8 in., height of 4 7/8 in. and depth of 1 in. (total depth: 2 3/16 in.)

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC THERMOSTAT

DOUBLE POLE - STE302R2+ SERIES

1 SINGLE PROGRAMMING **3000 W**

COMFORT AND SAVINGS GUARANTEED

The STE302R2+ double-pole thermostat fits perfectly with any style. It has a useful backlit screen. Also, it can be used to control electric heating units, with or without fans. It allows you to lower the temperature at a specific time of the day.

ECOLOGICAL ENERGY

3 YEAR WARRANTY

SIMPLE 4-STEP PROGRAMMING
LOWER THE TEMPERATURE AT NIGHT AND AUTOMATICALLY RETURN TO THE SELECTED TEMPERATURE DURING THE DAY

INCREASED SAVINGS AND COMFORT
INCOMPARABLE ACCURACY

BACKLIT SCREEN

CONSUMPTION SAVINGS
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

WATTAGE & VOLTAGE
150 W to 1500 W @ 120 V / 260 W to 2600 W @ 208 V / 300 W to 3000 W @ 240 V

CONTROL
- 4-wire connection
- acts like a programmable thermostat by automatically lowering the temperature once per 24-hour period (Single programming mode)
- compatible with forced-air units (Fan mode)
- frost-free warning
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control ± 0.18 °F

TEMPERATURE RANGE
between 37 to 86 °F

TECHNICAL SPECIFICATIONS

PRODUCT	WATTS		VOLTAGE	AMPERAGE	FREQUENCY	PACKAGING
CODE	MINIMUM	MAXIMUM	VOLTS	AMPERES	HZ	
STE302R2W+	150/260/300	1500/2600/3000	120/208/240	12.5	50/60	BOX

DIMENSIONS: width of 3 3/8 in., height of 4 7/8 in. and depth of 1 in. (total depth: 2 3/16 in.)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC THERMOSTAT

LOW VOLTAGE / 24 V - STE241 SERIES

1 SINGLE PROGRAMMING — 24 V

EFFICIENT RELAY CONTROL

The STE241 series low voltage (24 V) electronic thermostat is designed to control electric furnaces and °STELPRO "RE" series heating relays. It is compatible with either convection-mode or forced-air heating units as the cycles of this thermostat can be modified accordingly.

ECOLOGICAL ENERGY

3 YEAR WARRANTY

SIMPLE 4-STEP PROGRAMMING
LOWER THE TEMPERATURE AT NIGHT AND AUTOMATICALLY RETURN TO THE SELECTED TEMPERATURE DURING THE DAY

INCREASED SAVINGS AND COMFORT
INCOMPARABLE ACCURACY

BACKLIT SCREEN
MAY BE USED AS A NIGHTLIGHT

CONSUMPTION SAVINGS
ENERGY SAVINGS OF MORE THAN 30% WITH DAY/NIGHT TEMPERATURE REDUCTION OF 8 °F

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

VOLTAGE
0.5 A @ 24 Vac

CONTROL
- 3-wire connection
- compatible with electric furnaces (R, C, W connections) and °STELPRO "RE" series heating relays. Adjustable cycles to accomodate both convection and forced-air heating modes. Attention: not compatible with solely inductive loads.
- acts like a programmable thermostat by automatically lowering the temperature once per 24-hour period (Single programming mode)
- frost-free warning
- lock option at a maximum temperature set point (Security mode)
- display in either Fahrenheit or Celsius

ACCURACY
accurate ambient temperature control ± 0.18 °F

TEMPERATURE RANGE
between 37 to 86 °F

TECHNICAL SPECIFICATIONS

PRODUCT	VOLTAGE	FREQUENCY	PACKAGING
CODE	VOLTS	HZ	
STE241WB+	24 VAC	50/60	BOX

DIMENSIONS : width of 3 1/4 in., height of 4 3/4 in. and surface depth of 1 in. (total depth: 1 3/8 in.)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

THERMOSTAT

LOW VOLTAGE / 24 V - T822K1018/U SERIES

COLOR
white

DIMENSIONS
2.83 in. x 4.75 in. x 1.46 in.

VOLTAGE
1.2 A @ 24 Vac

CONTROL
- 2-wire connection
- all or nothing (on/off) @ 24 Vac
- compatible with all RE and R841 model relays (see selection on pages 94-95)
- temperature in degrees Fahrenheit

TEMPERATURE RANGE
between 50 and 86 °F

PRODUCT	DESCRIPTION	COLOR
T822K1018/U	LOW VOLTAGE THERMOSTAT (24 V)	WHITE

1 YEAR WARRANTY

THERMOSTAT

LOW VOLTAGE / 24 V - T87K1007/U SERIES

COLOR
white

DIMENSIONS
3 11/16 in. diameter x 1 3/4 in.

VOLTAGE
1 A @ 24 Vac

CONTROL
- 2-wire connection
- all or nothing (on/off)@ 24 Vac
- compatible with all RE and R841 model relays (see selection on pages 94-95)
- temperature in degrees Fahrenheit

TEMPERATURE RANGE
between 50 and 86 °F

PRODUCT	DESCRIPTION	COLOR
T87K1007/U	LOW VOLTAGE THERMOSTAT (24 V)	WHITE

1 YEAR WARRANTY

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

MECHANICAL THERMOSTAT

LINE VOLTAGE - SWT SERIES

SIMPLE AND INTUITIVE

The °STELPRO SWT series wall thermostat is easy to use and complements any decor. The SWT is compatible with most heating products, such as electric baseboards, wall fan heaters or commercial fan-forced heaters (with 120 to 277 Vac coil contactor). The SWT thermostat is available in two models: single or double pole.

1 YEAR WARRANTY

SIMPLE ADJUSTMENT FOR THE DESIRED TEMPERATURE

EASY INSTALLATION AND INTUITIVE OPERATION

SLEEK APPEARANCE

DESIGNED FOR

AND MORE...

COLOR
white

FINISH
molded plastic

CONTROL
- 2-wire connection (single pole model) or 4-wire connection (double pole model)
- temperature in degrees Fahrenheit
- off position (double pole model)

TEMPERATURE RANGE
between 50 to 90 °F

VOLTAGE
- 22 A @ 120-277 Vac
- 1/2 hp

TECHNICAL SPECIFICATIONS

PRODUCT	DESCRIPTION
CODE	
SWT1F	SINGLE POLE THERMOSTAT (FAHRENHEIT)
SWT2F	DOUBLE POLE THERMOSTAT (FAHRENHEIT)

DIMENSIONS : width of 2 29/32 in., height of 4 37/64 in. and depth of 1 9/64 in.

c UL us

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTRONIC RELAY

LOW VOLTAGE | RE25 – RE30

DIMENSIONS

- RE253: 4.10 in. x 4.10 in. x 2.10 in.
- RE306C: 4.76 in. x 4.70 in. x 3 in.

CONTROL

- pulsed signal (PWM) or all or nothing (on/off) at 24 Vac, 3-32 Vdc signal
- with transformer (RE253T)
- compatible with STE241, T822K1018/U and T87K1007/U thermostats
- two additional relays without transformers can be added to the same control circuit as a relay with transformer
- installation of more than 4 relays without transformers to the same thermostat is not recommended

INSTALLATION

the relay must be installed in an external junction box

RE253C

RE253T

RE306C

PRODUCT	DESCRIPTION
RE253C	ELECTRONIC LOW VOLTAGE RELAY [25 A @ 120 V, 208 V, OR 347 V]
RE253T	ELECTRONIC LOW VOLTAGE RELAY [25 A @ 208 V OR 347 V] (W/TRANSFO)
RE306C	ELECTRONIC LOW VOLTAGE RELAY [30 A @ 120 V-600 V]

3 YEAR WARRANTY

ELECTRONIC RELAY

LOW VOLTAGE – SMALLER-SIZED | RE15

DIMENSIONS

- RE153 and RE156: 3.31 in. x 2.17 in. x 0.89 in.
- RE153T: 3.31 in. x 2.17 in. x 1.5 in.

CONTROL

- pulsed signal (PWM) or all or nothing (on/off) at 24 Vac, 3-32 Vdc signal
- with transformer (RE153T)
- compatible with STE241, T822K1018/U and T87K1007/U thermostats
- two additional relays without transformers can be added to the same control circuit as a relay with transformer
- installation of more than 4 relays without transformers to the same thermostat is not recommended

INSTALLATION

the relays must be installed inside the junction box of the heating unit

RE153T

RE156

RE153

PRODUCT	DESCRIPTION
RE153	ELECTRONIC LOW VOLTAGE RELAY [15 A @ 120 V-347 V]
RE156	ELECTRONIC LOW VOLTAGE RELAY [6 A @ 120 V-600 V]
RE153T	ELECTRONIC LOW VOLTAGE RELAY [15 A @ 208 V-347 V] (W/TRANSFO)

3 YEAR WARRANTY

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

ELECTROMECHANICAL RELAY

LOW VOLTAGE | R841

DIMENSIONS

see the technical drawings

CONTROL

- all or nothing (on/off)
- with transformer 24 V (with exception of the R841D1036 w/o transformer)
- compatible with T822K1018/U and T87K1007/U thermostats (the R841D1036 w/o transformer is also compatible with the STE241 thermostat)
- installation of more than 4 relays without transformer to the same thermostat is not recommended (2 relays without transformer if connected to a STE241 thermostat)
- no additional relay can be connected to the same control circuit as a relay with transformer

INSTALLATION

These relays can be installed in an external junction box. These relays may or may not be installed in the junction box of the heating unit. (see the accessories table for the heating unit)

R841C1169

PRODUCT	DESCRIPTION
R841C1169	ELECTRO. MECHA. RELAY C/W TRANSFORMER 24 V [6000 W @ 240 V AND 5200 W @ 208 V]
R841C1144	ELECTRO. MECHA. RELAY C/W TRANSFORMER 24 V [6000 W @ 347 V]
R841C1151	ELECTRO. MECHA. RELAY C/W TRANSFORMER 24 V [6000 W @ 600 V]
R841D1036	ELECTRO. MECHA. RELAY W/O TRANSFORMER 24 V [6000 W @ 120-600 V]

TECHNICAL DRAWINGS

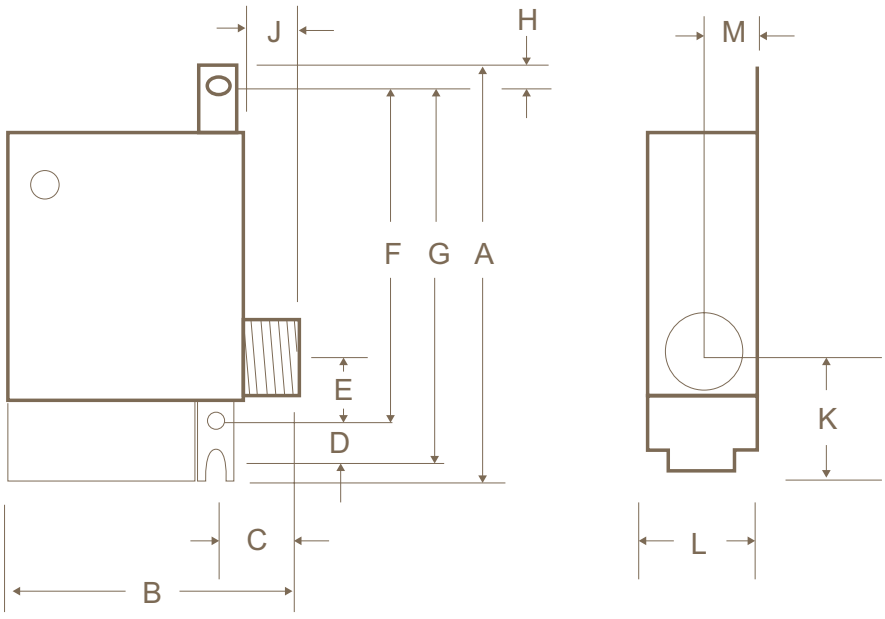

DIMENSIONS

KEY	A	B	C	D	E	F	G	H	J	K	L	M
MM (nominal)	95	65	20	10	20	75	85	5	10	35	40	15
IN.	3 1/4	2 3/8	3/4	15/32	3/4	2 29/32	3 3/8	1/4	7/16	1 15/32	1 1/2	5/8

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

UNIVERSAL THERMOSTAT GUARD

TG511A1000 SERIES

MANUFACTURING

- clear plastic
- compatible with all thermostats sold by °STELPRO
- features a tumbler lock (keys included)
- can be installed without removing the thermostat from the wall
- protection against vandalism, damage and unauthorized tampering of settings

INSIDE DIMENSIONS

6 1/16 in. x 5 1/16 in. x 2 15/16 in.

PRODUCT	DESCRIPTION
TG511A1000	UNIVERSAL THERMOSTAT GUARD

KEYS (INCLUDED)
the ambient temperature can only be changed by the key owner

1 YEAR WARRANTY

THERMOSTAT GUARD

F29 SERIES

F290143

F290193

MANUFACTURING

- clear plastic (F290143) or metal (F290193)
- compatible with STCNP, STCP, STE252NP, STE302R2+, STE241, T822K1018/U and T87K1007/U thermostats
- features a tumbler lock (keys included)
- protection against vandalism, damage and unauthorized tampering of settings

INSIDE DIMENSIONS

- F290143: ring base of 3 1/2 in. x 6 3/8 in. x 3 1/4 in., solid base of 3 1/2 in. x 6 3/8 in. x 3 in.
- F290193: 3 13/16 in. x 6 in. x 3 1/8 in.

PRODUCT	DESCRIPTION
F290143	CLEAR PLASTIC THERMOSTAT GUARD
F290193	METAL THERMOSTAT GUARD

KEYS (INCLUDED)
the ambient temperature can only be changed by the key owner

1 YEAR WARRANTY

MECHANICAL TIMER

FD60M SERIES

COLOR

white

DIMENSIONS

1.6 in. x 2.79 in. x 1.19 in.

VOLTAGE

20 A @ 120 Vac / 10 A @ 240 and 277 Vac

INSTALLATION

wall mounted with wall plate (not provided)

CONTROL

- 60-minute timer
- used to control fan forced units such as: ARWF, ASKS, ASK

PRODUCT	DESCRIPTION
FD60MCW70	60-MINUTE TIMER

1 YEAR WARRANTY

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice.
For all the latest models and prices, please refer to our website at www.stelpro.com.

BATHROOM FANS & HAND DRYERS

BETTER DESIGNED
VENTILATION

°1 SERIES

CHOICE OF INSTALLATION, PERFORMANCE AND TRANQUILITY

With its optional dual speed fan, wide choice of capacities and three types of installation, the °1 SERIES is the professional's choice. Ultra-quiet and with lifetime motor lubrication, the °STELPRO bathroom fans °1 SERIES come with a 5-year warranty.

- **ULTRA-QUIET**
- **46 TO 168 SQ.FT.**
- **OPTIONAL DUAL SPEED FAN**
- **LIGHT OPTIONS (LIGHT AND NIGHTLIGHT)**
- **REMOVABLE MOTOR AND SUPPORT, ALLOWING EASY INSTALLATION BY A SINGLE PERSON**
- **CHOICE OF THREE TYPES OF INSTALLATION**
- **EFFICIENT AND SILENT, THE BALL-BEARING MOTOR IS LUBRICATED FOR LIFE**

FEATURES

COLOR

white

MANUFACTURING

- UV protected plastic grille with rounded corners
- models with a light:
  - BFSQLI110-070 - incandescent light (75 W) acts as primary light (not included)
  - BFSQLF110-070 - fluorescent light (23 W) acts as primary light (included)
  - one light (4 W) acts as nightlight (included only with the BFSQLI110-070)

CONTROL

- single wall switch (the nightlight on models with a light cannot be used with this type of switch) (not included)
- triple switch for models with a light (not included)

INSTALLATION

- ceiling recessed installation only
- approved for installations above the shower or bath when installed on a (GFCI) protected circuit
- installed centered between joists with sliding brackets (included)
- installed against joist, fixed from the inside
- replacing an existing fan or in a finished ceiling

5 YEAR WARRANTY

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	MODEL	SOUND LEVEL	FLOW	DUCT	VOLTAGE	CAPACITY	
CODE		SONES	CFM	IN.	VOLTS	SQ.FT.	
BFSQ050	SINGLE SPEED	0.3	50	4	120	46	NO
BFSQ080	SINGLE SPEED	0.6	80	4	120	75	YES
BFSQ110	SINGLE SPEED	1.2	110	4	120	103	YES
BFSQ150L5	SINGLE SPEED (LARGE IMPELLER)	1.0	150	5	120	140	YES
BFSQ180L5	SINGLE SPEED (LARGE IMPELLER)	1.5	180	5	120	168	YES
BFSQ110-050	DUAL SPEED	1.2 – 0.3	110 – 50	4	120	103	NO
BFSQLF110-070	DUAL SPEED + FLUORESCENT LIGHT + NIGHTLIGHT	1.2 – 0.4	110 – 70	4	120	103	YES
BFSQLI110-070	DUAL SPEED + INCANDESCENT LIGHT + NIGHTLIGHT	1.2 – 0.4	110 – 70	4	120	103	NO

All models are approved for installation above the shower or bath when installed on a (GFCI) protected circuit (ceiling mounted only).

ACCESSORIES

PRODUCT	DESCRIPTION
LK-BFSQLF	LIGHT KIT FOR BFSQLF
LK-BFSQLI	LIGHT KIT FOR BFSQLI

TECHNICAL DRAWINGS



BFSQ GRILLE

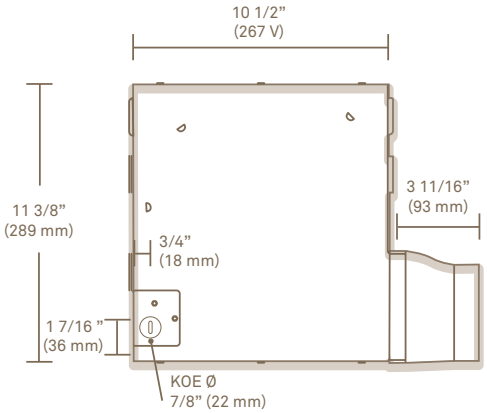

TOP



BFSQL GRILLE



LEFT SIDE

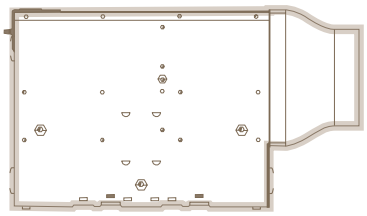

FRONT

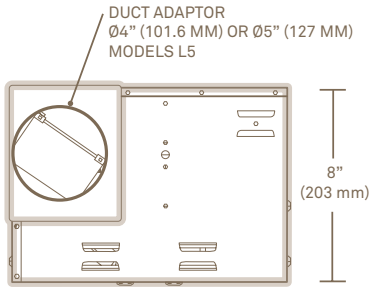

RIGHT SIDE

PERFORMANCE CHARTS

The air flow curve rate indicates that the electrical consumption is very efficient even with high static pressure. This curve serves to determine the air flow rate for each installation.

STATIC PRESSURE (HIGH SPEED)
WATTS (HIGH SPEED)
STATIC PRESSURE (LOW SPEED)
WATTS (LOW SPEED)

BFSQ050

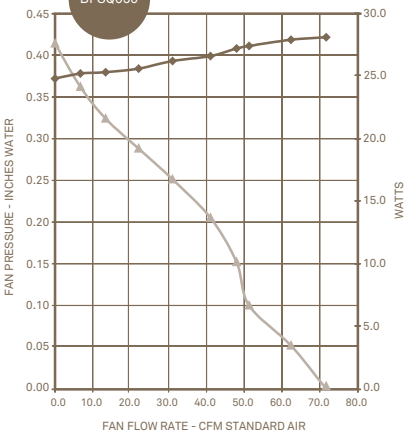

BFSQ080

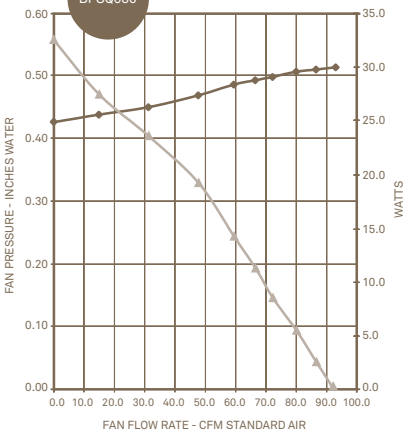

BFSQ110

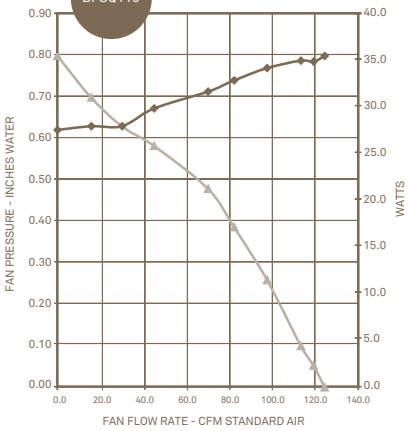

BFSQ150L5

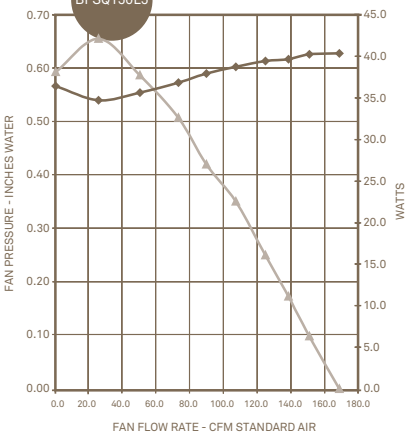

BFSQ180L5

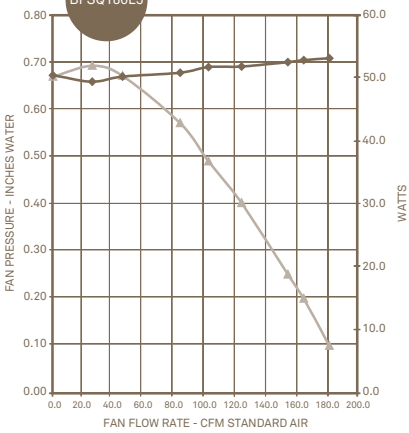

BFSQ 110-050

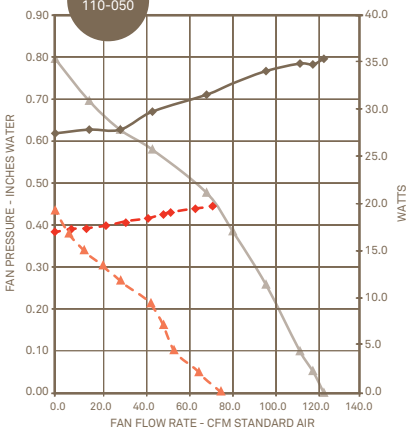

BFSQLF 110-070

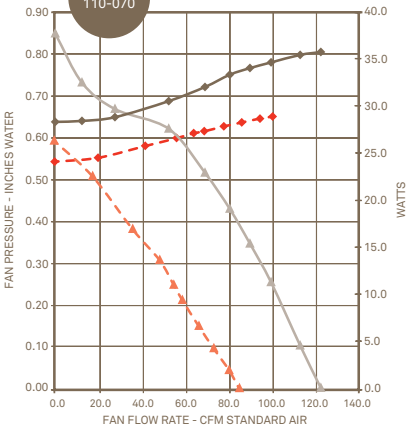

BFSQLI 110-070

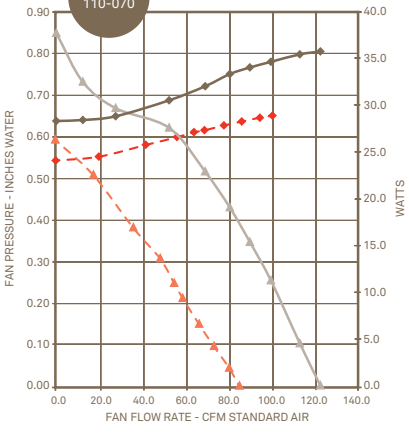

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

°2 SERIES

COMFORT, ELEGANCE AND CALM

The °STELPRO bathroom fan °2 SERIES is the most versatile on the market. With its modern design and clever conception, the °2 SERIES offers a light option and a lifetime lubricated motor, and is a pleasure to install.

- **QUIET**
- **46 TO 94 SQ.FT.**
- **OPTIONAL LIGHT**
- **REMOVABLE MOTOR AND SUPPORT, ALLOWING EASY INSTALLATION BY A SINGLE PERSON**
- **CHOICE OF TWO TYPES OF INSTALLATION**
- **EFFICIENT AND SILENT, THE BALL-BEARING MOTOR IS LUBRICATED FOR LIFE**

FEATURES

COLOR

white

MANUFACTURING

- plastic grille with rounded corners protected against UV rays
- model with light: BFQLF080 - fluorescent light (23 W) acts as primary light (included)

CONTROL

- single wall switch (not included)
- double switch for the model with a light (controls the fan and the light independently) (not included)

INSTALLATION

- ceiling recessed installation only
- approved for usage above the shower or bath when connected to a (GFCI) protected, grounded circuit
- installed against joist, fixed from the inside
- replacing an existing fan or in a finished ceiling

3 YEAR WARRANTY

TECHNICAL SPECIFICATIONS

PRODUCT	MODEL	SOUND LEVEL	FLOW	DUCT	VOLTAGE	CAPACITY	
CODE		SONES	CFM	IN.	VOLTS	SQ.FT.	
BFQ050	**SINGLE SPEED**	0.3	50	4	120	46	NO
BFQ080	**SINGLE SPEED**	1.2	80	4	120	75	YES
BFQ100	**SINGLE SPEED**	2	100	4	120	94	YES
BFQLF080	**SINGLE SPEED + FLUORESCENT LIGHT**	2	80	4	120	75	YES

All models are approved for installation above the shower or bath when installed on a (GFCI) protected circuit (ceiling mounted only).

TECHNICAL DRAWINGS



BFQ GRILLE

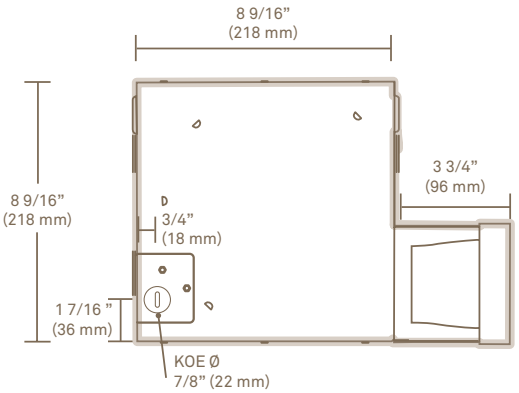

TOP



BFQL GRILLE



LEFT SIDE

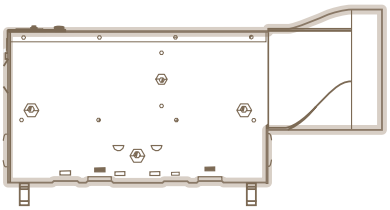

FRONT



RIGHT SIDE

PERFORMANCE CHARTS

The air flow curve rate indicates that the electrical consumption is very efficient even with high static pressure. This curve serves to determine the air flow rate for each installation.

STATIC PRESSURE
WATTS

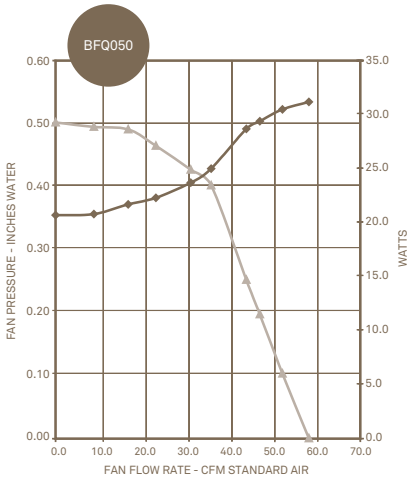

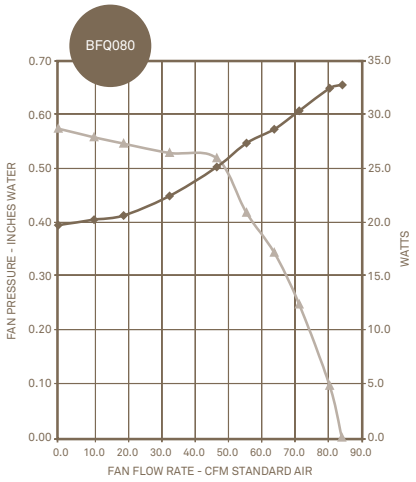

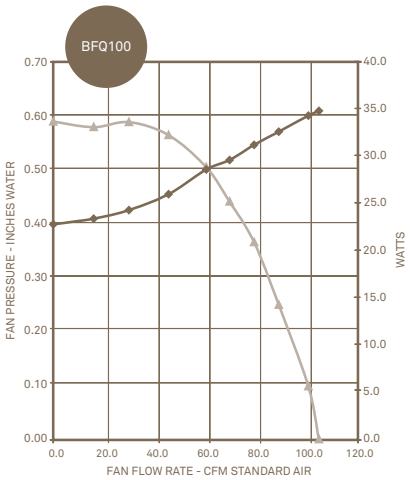

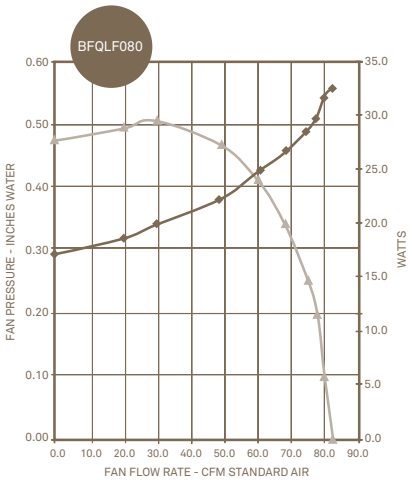

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

°3 SERIES

QUALITY AT A FRIENDLY PRICE

The °3 SERIES from °STELPRO represents the best quality in its price range in the industry. With five models available, the °STELPRO bathroom fan °3 SERIES offers a wide range of choices to answer all your needs.

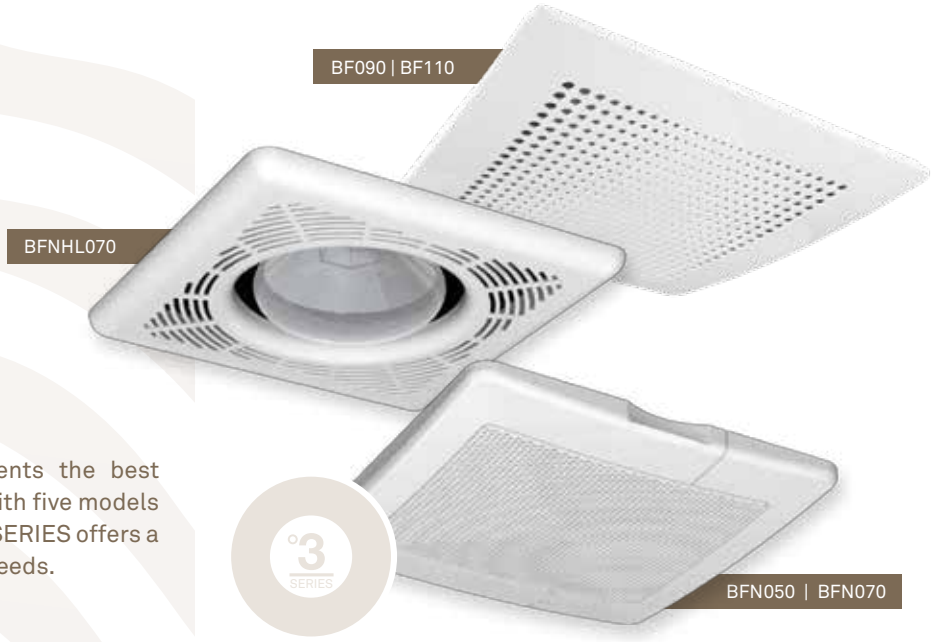

46 TO 103 SQ.FT.

ONE TYPE OF INSTALLATION

REMOVABLE MOTOR AND SUPPORT, ALLOWING EASY INSTALLATION BY A SINGLE PERSON

FEATURES

COLOR

white

MANUFACTURING

- plastic grille with rounded corners protected against UV rays
- model with light: BFNHL070 - heating light (R40 type bulb required – maximum 250 W) (not included)

CONTROL

- single wall switch (not included)
- double switch for the model with a heating light (independently controls the fan and the light) (not included)

INSTALLATION

- ceiling recessed installation only
- approved for usage above the shower or bath when connected to a (GFCI) protected, grounded circuit (BF090 and BF110 models only)
- BFNHL070 model: installed against joist using wooden headers (not included) or sliding brackets (included)
- all other models: installed against joist, fixed from the inside

1 YEAR WARRANTY

TECHNICAL DRAWINGS

BFNHL070 MODEL

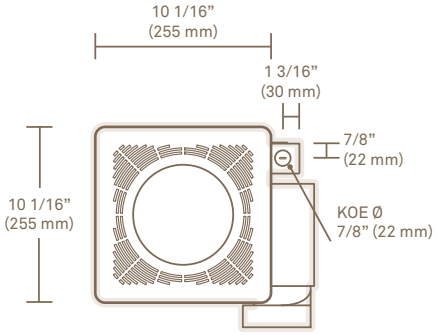

GRILLE



BOTTOM

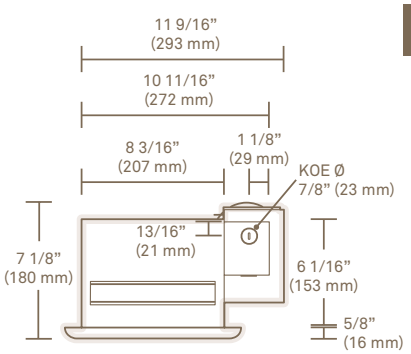

LEFT SIDE



RIGHT SIDE

BF090 AND BF110 MODELS



GRILLE

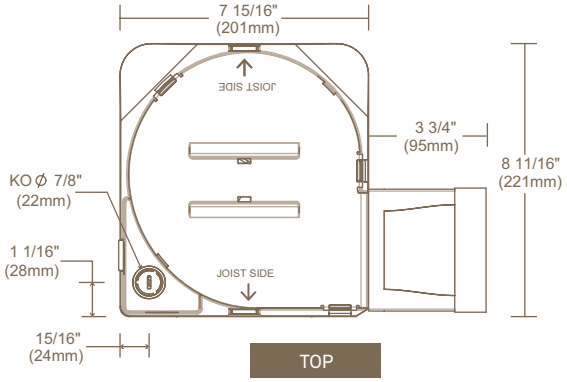

TOP

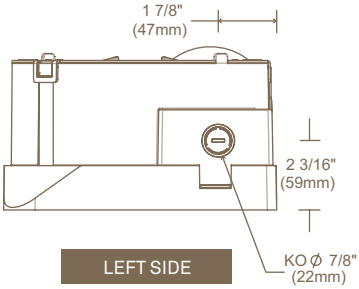

LEFT SIDE

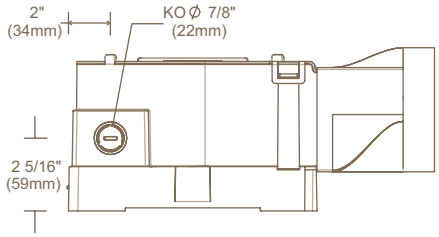

FRONT

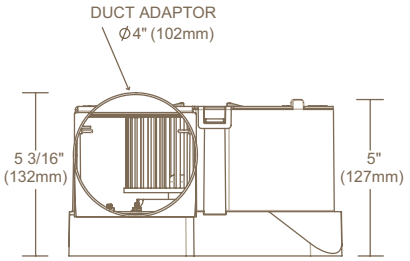

RIGHT SIDE

BFN050 AND BFN070 MODELS



GRILLE

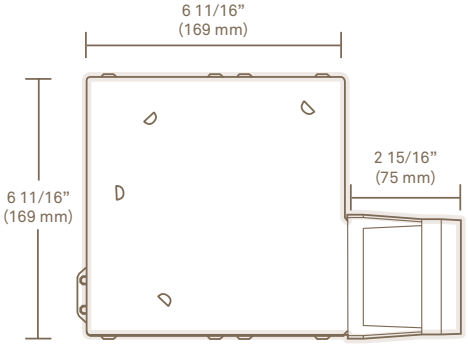

TOP



LEFT SIDE

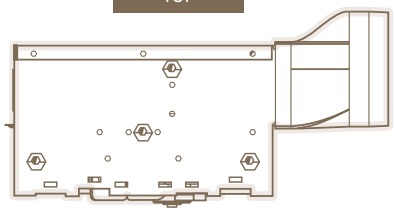

FRONT

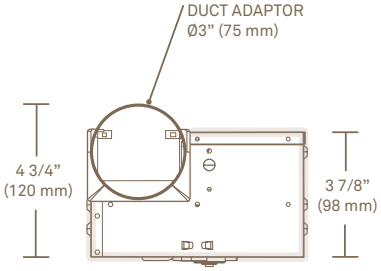

RIGHT SIDE

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT	MODEL	SOUND LEVEL	FLOW	DUCT	VOLTAGE	CAPACITY
CODE		SONES	CFM	IN.	VOLTS	SQ.FT.
BFN050	**SINGLE SPEED**	3	50	3	120	46
BFN070	**SINGLE SPEED**	5.5	70	3	120	65
BFNHL070	**SINGLE SPEED + HEAT LAMP**	4	70	4	120	65
BF090*	**SINGLE SPEED**	2.5	90	4	120	85
BF110*	**SINGLE SPEED**	4	110	4	120	103
BFN050FR6	**CASING KIT**	3	50	3	120	46
BFN050M06	**MOTOR AND GRILLE KIT**	3	50	3	120	46
BF090FR6	**CASING KIT**	2.5	90	4	120	85
BF090M06	**MOTOR AND GRILLE KIT**	2.5	90	4	120	85

* BF090 and BF110 are approved for installation above the shower or bath when installed on a (GFCI) protected circuit (ceiling mounted only).

PERFORMANCE CHARTS

The air flow curve rate indicates that the electrical consumption is very efficient even with high static pressure. This curve serves to determine the air flow rate for each installation.

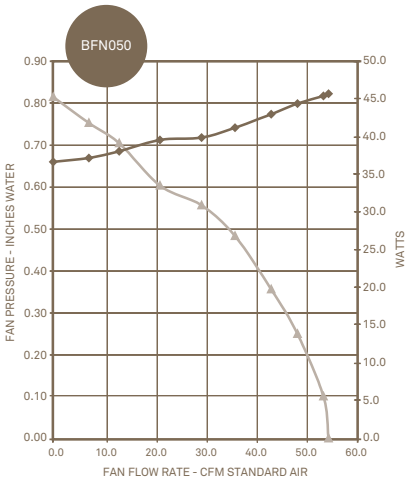

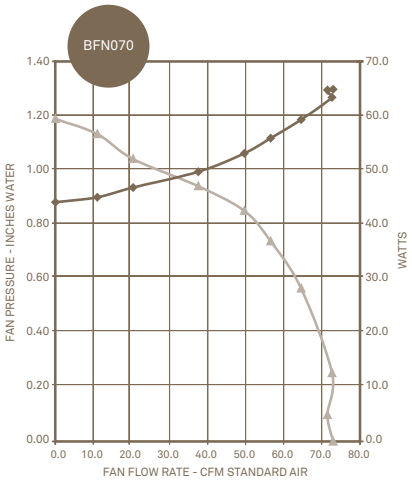

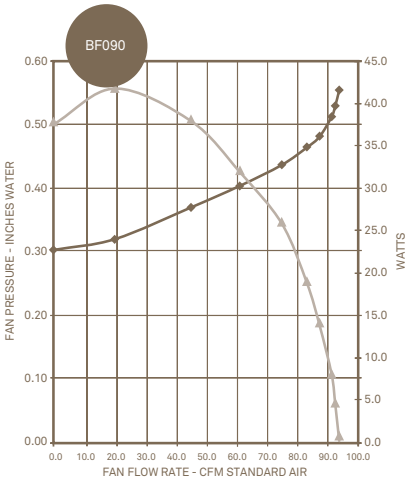

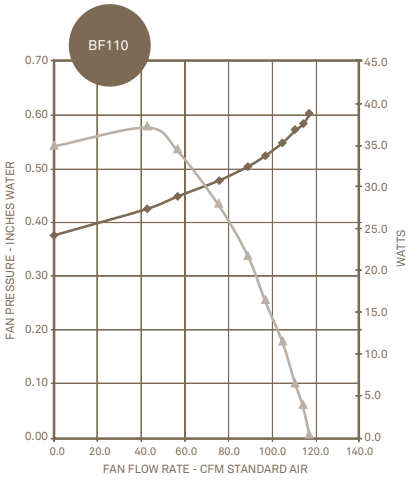

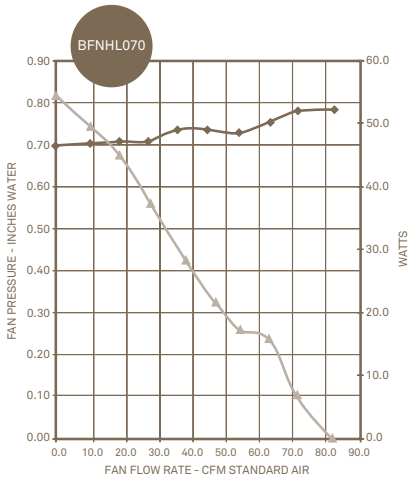

EL-NIÑO HAND DRYER

ELN SERIES

THE PERFECT COMBINATION OF POWER AND STYLE

The EL-NIÑO is absolutely incredible; you have to feel it to believe it. This powerful hand dryer dries hands completely in mere seconds. The EL-NIÑO is a quiet, energy efficient solution that combines quick drying with overall savings. In fact, this state-of-the-art hand dryer offers four personalized operating modes to respond to your different needs. Save time and money with the stylish EL-NIÑO!

FOUR PERSONALIZED OPERATING MODES: A FIRST IN THE INDUSTRY

HEAVY DUTY DIE-CAST ALUMINUM ALLOY SHELL

ENERGY AND COST EFFICIENT

STYLISH AND COMPACT

SEMI-RECESSED INSTALLATION
4 INCHES OR LESS TO MEET ADA STANDARDS
(AMERICANS WITH DISABILITIES ACT)

RECOMMENDED INSTALLATION HEIGHTS
Distance between floor and bottom of hand dryer

MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED
45”	43”	41”	35”	37”

FEATURES

COLORS
- standard: white
- luxurious finish: brushed chrome (surcharge)
- optional: silica white, almond, black, clear anodized (paint), textured charcoal, dark brown (10% surcharge)

FINISH
epoxy-polyester powdercoat or chrome-plated

MANUFACTURING
- rib reinforced shell, solidly constructed of die-cast aluminum alloy
- lightweight, heavy duty and rustproof shell
- secured to wall bracket with two chrome-plated tamper-proof bolts

ELEMENT
nichrome element located in motor section

CONTROL
- four personalized operating modes to meet your needs
- infrared optical sensor located next to the air outlet activates and deactivates the hand dryer
- 60-second lockout feature is activated if hands are not removed before this time

INSTALLATION
- surface mounted
- optional semi-recessed installation with depth of 4 inches or less; meets ADA standards *(Americans with Disabilities Act)*

5 YEAR* WARRANTY

TECHNICAL SPECIFICATIONS

PRODUCT	POWER WATTS*			POWER BTU/H*	VOLTAGE	AMPERAGE	WEIGHT
CODE	ELEMENT	MOTOR	TOTAL		VOLTS	AMPERES	LB
ELNV0901A	900	550	1450	4948	120	12	9.8
ELNV0902A	900	550	1450	4948	240	6	9.8
ELNV0908A	900	550	1450	4948	208	7	9.8

* Data obtained in Normal/High mode
Add W for white or BC for brushed chrome

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. * 3 years on electronic components.

c UL us LISTED

OPERATING MODES

The El-Niño's built-in electronic control provides you with the option to personalize your unit to meet all your needs.

ULTIMATE – Normal/High mode

High air speed and full heating power for quick drying
Ideal for: stadiums, arenas, theatres, public places, and warehouses

COMFORT – Normal/Low mode

Reduced air speed and moderate heating power for comfortable noise level and heat range
Ideal for: libraries, small restaurants and coffee shops

ECONOMICAL – Eco/High mode

High air speed without heat for quick drying with energy and cost savings
Ideal for: schools, universities, amusement parks, warehouses and large restaurants

HARMONY – Eco/Low mode

Reduced air speed without heat for energy savings and a moderate noise level
Ideal for: hospitals, libraries, daycares, small restaurants and coffee shops

LEGEND

AIR SPEED	HEATING POWER	NOISE LEVEL	ENERGY SAVINGS

MODE	NOISE LEVEL (DB)		AIR SPEED (LFM)		TOTAL POWER		DRYING TIME
	WITHOUT HANDS	WITH HANDS	AT AIR OUTLET	AT HAND LEVEL*	WATTS	BTU/H	SECONDS
ULTIMATE - NORMAL/HIGH	77	90	19000	16000	1450	4948	10
COMFORT - NORMAL/LOW	72	85	11400	9600	1175	4010	15
ECONOMICAL - ECO/HIGH	77	90	19000	16000	550	1877	15
HARMONY - ECO/LOW	72	85	11400	9600	465	1587	20

* 4 inches below

TECHNICAL DRAWINGS

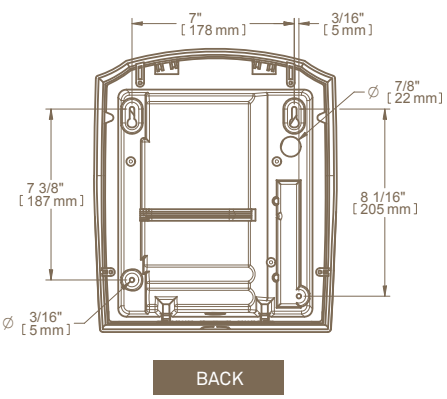

BACK



SIDE

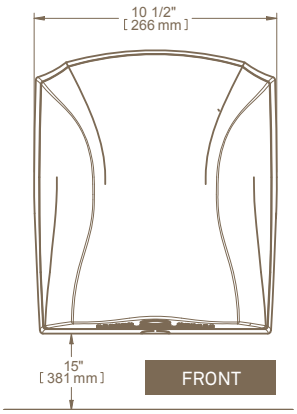

FRONT



RECESSED

FLOOR OR COUNTER

3 LEVELS OF DETECTION

Adjust the sensitivity level of your hand dryer to meet usage requirements.

Detection distances may vary depending on lighting conditions.

MAXIMAL DETECTION – STANDARD (APPROX. 4 IN.)

MEDIUM DETECTION – DECREASED (APPROX. 3 IN.)

MINIMAL DETECTION – MINIMUM (APPROX. 2 IN.)

ACCESSORIES

HOLE FOR ELECTRICAL CONNECTION

The optional drilled hole allows for an electrical connection to the top of the unit in the case where access to the junction box from inside the wall or the bottom of the unit is problematic or not required (only available for surface mounted installation).

WALL GUARD

The wall guard protects the wall under the hand dryer from drops of water due to wet hands being blown dry, keeping bacteria from forming on the wall.

PRODUCT	DESCRIPTION
ELNKOE	Hole for electrical connection
SHDXL-89W	Wall guard - white (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)
SHDXL-89B	Wall guard - black (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)
SHDXL-89S	Wall guard - stainles steel (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

LA-NIÑA HAND DRYER

LAN SERIES

VERSATILITY WITHIN REACH

Count on LA-NIÑA and you won't be disappointed. One model, three voltages: its versatility will amaze you! This multi-voltage hand dryer can be used in many different environments due to its four personalized operating modes. The LA-NIÑA hand dryer takes up very little wall space; only 4 inches deep! LA-NIÑA is a winner!

MULTI-PURPOSE AND MULTI-VOLTAGE
ONE MODEL FOR ALL USES

FOUR PERSONALIZED OPERATING MODES
CONTROLLED BY A CIRCUIT BOARD TO BETTER MEET ALL YOUR NEEDS

VERY QUIET
IN HARMONY MODE

ENERGY EFFICIENT
IN ECONOMICAL AND HARMONY MODES

RAPID INSTALLATION AND SERVICE

STYLISH AND COMPACT
DEPTH OF 4 INCHES OR LESS; MEETS ADA STANDARDS *(AMERICANS WITH DISABILITIES ACT)*

RECOMMENDED INSTALLATION HEIGHTS Distance between floor and bottom of hand dryer				
MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED
45"	43"	41"	35"	37"

3 YEAR WARRANTY

FEATURES

COLORS
- standard: white
- luxurious finish: brushed chrome (surcharge)

MANUFACTURING
- Lexan rib reinforced shell; lightweight and resistant
- secured to wall bracket with two stainless steel tamper-proof bolts

WATTAGE AND VOLTAGE
- multi-voltage
- see technical specifications table

ELEMENT
nichrome element located in the motor section

CONTROL
- four personalized operating modes to meet your needs
- infrared optical sensor located next to the air outlet activates and deactivates the hand dryer
- 60-second lockout feature is activated if hands are not removed before this time

INSTALLATION
surface mounted: depth of 4 inches or less; meets ADA standards *(Americans with Disabilities Act)*

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	AMPERAGE	COLOR	WEIGHT
CODE	WATTS*	BTU/H*	VOLTS	AMPERES		LB
LANV1200AW	1350	4607	120/208/240	11	WHITE	5.5
LANV1200ABC	1350	4607	120/208/240	11	BRUSHED CHROME	5.5

* Data obtained in Ultimate mode. This hand dryer is multi-voltage for 120V/208V/240V and will automatically adjust power to optimize performance.

OPERATING MODES

The LA-NIÑA's built-in electronic control provides you with the option to personalize your unit to meet all your needs. The unit is controlled by an internal circuit board. The LA-NIÑA and EL-NIÑO hand dryers have the same circuit board. For a more detailed description of the four modes, refer to page 107.

MODE	NOISE LEVEL	AIR SPEED	TOTAL POWER	DRYING TIME
	DB	CFM	WATTS	SECONDS
ULTIMATE	69	108	1350	30
COMFORT	63	78	910	35
ECONOMICAL	69	108	135	40
HARMONY	63	78	65	45

WHITE

BRUSHED CHROME

TECHNICAL DRAWINGS

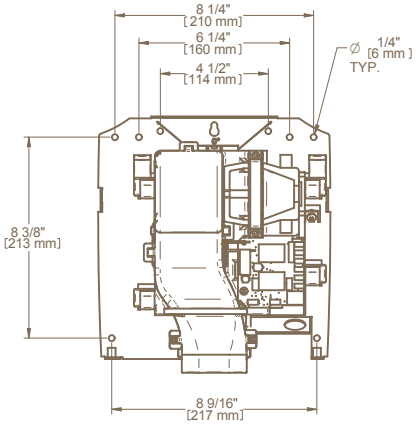

INSIDE



SIDE

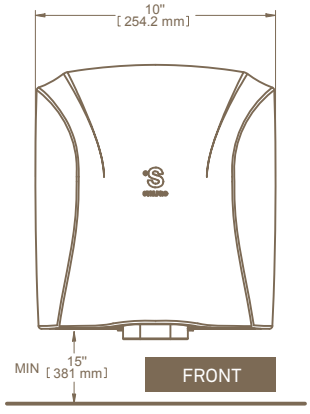

FLOOR OR COUNTER

3 LEVELS OF DETECTION

Adjust the sensitivity level of your hand dryer to meet usage requirements.

Detection distances may vary depending on lighting conditions.

MAXIMAL DETECTION – STANDARD (APPROX. 4 IN.)

MEDIUM DETECTION – DECREASED (APPROX. 3 IN.)

MINIMAL DETECTION – MINIMUM (APPROX. 2 IN.)

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

c UL us LISTED

HAIR DRYER

ASHDLPBH76 SERIES

POWER FROM EVERY ANGLE

The ASHDLPBH 76 series hair dryers, designed to be surface mounted onto the wall, are constructed from a one-piece ultra-resistant shell. They are equipped with a push button and a 360˚ directional air nozzle, making it just as easy to dry your hands as it is to dry your hair.

360° DIRECTIONAL AIR NOZZLE!

PUSH BUTTON
CONTROLLED STARTUP

FEATURES

COLORS
- standard: white
- luxurious finish: chrome (surcharge)

FINISH
epoxy-polyester powdercoat or chrome finish

MANUFACTURING
- one-piece ultra-resistant shell with rounded sides, reinforced with zinc alloy
- lightweight, heavy duty and rustproof with a zinc alloy push button in a chrome finish
- zinc alloy 360° directional air nozzle in a chrome finish

ELEMENT
nichrome element

CONTROL
push button controls the startup, lasting 90 seconds, controlled by a sealed electronic timer

INSTALLATION
wall mounted

RECOMMENDED INSTALLATION HEIGHTS				
MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED
Distance between floor and bottom of HAIR DRYER				
64”	58”	56”	43”	45”
Distance between floor and bottom of HAND DRYER				
40”	38”	36”	30”	32”

TECHNICAL DRAWINGS



TOP



SIDE

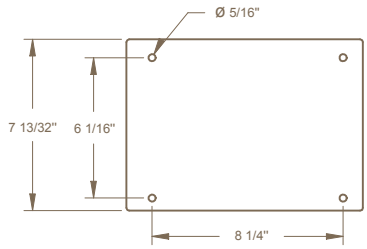

BACK

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	AMPERAGE	WEIGHT
CODE	WATTS*	BTU/H*	VOLTS	AMPERES	LB
ASHDLPBH761	2000	6825	120	20	18
ASHDLPBH768	2000	6825	208	10	18
ASHDLPBH762	2000	6825	240	10	18

* Data obtained in Ultimate mode. This hand dryer is multi-voltage for 120V/208V/240V and will automatically adjust power to optimize performance. Add W for white or CH for chrome

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.** For all the latest models and prices, please refer to our website at www.stelpro.com. * 3 years on electronic components.

HAND DRYER

ASHDL SERIES

SAME MODEL, TWO VERSIONS

The ASHDL series hand dryer is constructed with a one piece, ultra-resistant Lexan cover and is surface-mounted onto the wall. It is available either fully automatic or with a push button.

STARTS AND STOPS AUTOMATICALLY
(ASHDLAS MODEL)

PUSH BUTTON
STARTS AND STOPS MANUALLY (ASHDLPB MODEL)

FEATURES

COLOR
white

MANUFACTURING
- shell is a one-piece mold of Lexan 940
- secured to a zinc alloy wall bracket with two chrome-plated, tamper-proof bolts
- chrome-plated, die-cast zinc turbine forces air
- tamper-proof vent, preventing the insertion of foreign objects

SOUND LEVEL
72 dBA

ELEMENT
nichrome

CONTROL
- ASHDLAS model - an infrared optical sensor located next to the air outlet activates the hand dryer
- a 90-second lockout feature is activated if hands are not removed before this time
- ASHDLPB model - push button start
- built-in 30-second sealed electronic timer

INSTALLATION
wall mounted

TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	AMP.	WEIGHT
CODE	WATTS	BTU/H	VOLTS	AMPERES	LB
ASHDLAS1W	2000	6825	120	20	20
ASHDLAS8W	2000	6825	208	11	20
ASHDLAS2W	2000	6825	240	10	20
ASHDLPB1W	2000	6825	120	20	18
ASHDLPB8W	2000	6825	208	11	18
ASHDLPB2W	2000	6825	240	10	18

RECOMMENDED INSTALLATION HEIGHTS

Distance between floor and bottom of hand dryer

MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED
43”	41”	39”	33”	35”

TECHNICAL DRAWINGS

RECESSED



SIDE



FRONT



BACK

*STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com. * 3 years on electronic components.

XLERATOR HAND DRYER

SHDXL SERIES

THE PERFECT COMBINATION OF POWER AND STYLE

The first high velocity hand dryer on the market, the XLERATOR sets the standard for quality and performance in its category. The XLERATOR dries hands in seconds, making it the ultimate choice in washrooms with high traffic, such as stadiums, arenas and public places. Its reinforced, die-cast zinc alloy shell make it virtually unbreakable. The first choice for LEED® buildings, the XLERATOR is the ideal high velocity hand dryer!

DRIES HANDS IN ONLY 15 SECONDS!

STARTS AND STOPS AUTOMATICALLY

PERFECT FOR LEED® BUILDINGS

RECOMMENDED INSTALLATION HEIGHTS
Distance between floor and bottom of hand dryer

MEN	WOMEN	TEENAGERS	CHILDREN	HANDICAPPED
45”	43”	41”	35”	37”

FEATURES

COLORS
- standard: white, white polymer BMC
- luxurious finish: chrome, graphite or brushed stainless steel (surcharge)

FINISH

epoxy-polyester powdercoat

MANUFACTURING
- rib reinforced shell, solidly constructed of die-cast zinc alloy
- lightweight, unbreakable and rustproof
- secured to its supporting wall bracket with two chrome-plated, tamper-proof bolts

SOUND LEVEL

71 dBA (81 dBA with hands)

ELEMENT

nichrome element producing instant heat

CONTROL
- infrared optical sensor located next to the air outlet activates hand dryer
- 35-second lockout feature is activated if hands are not removed before this time

INSTALLATION

wall mounted

5 YEAR* WARRANTY

TECHNICAL SPECIFICATIONS

PRODUCT	POWER WATTS			POWER BTU/H	VOLTAGE	AMPERAGE	WEIGHT
CODE	ELEMENT	MOTOR	TOTAL		VOLTS	AMPERES	LB
SHDXLAS1	1000	500	1500	5119	120	12.5	16
SHDXLAS8	1000	500	1500	5119	208	7.0	16
SHDXLAS2	1000	500	1500	5119	240	6.5	16

Add W for white, BW for white polymer BMC, CH for chrome, SS for brushed stainless steel or GR for graphite

c UL us LISTED

CHOICE OF 5 COLORS

WHITE

CHROME

WHITE POLYMER BMC

BRUSHED STAINLESS STEEL

GRAPHITE

Create a memorable impact by personalizing your hand dryer. Choose your color and have your company logo printed right on the dryer. For more details, contact your °Stelpro representative.

PERSONALIZATION

°STELPRO reserves the right to modify descriptions or manufacturing specifications without prior notice. **Returns are not accepted for orders of products with optional colors.**
For all the latest models and prices, please refer to our website at www.stelpro.com.

TECHNICAL DRAWINGS



TOP



FRONT



SIDE



BACK

ACCESSORIES

RECESS KIT

The recess kit is comprised of a stainless steel, satin finish wall box and mounting plate. When installed with the recess kit, the XLERATOR takes up less than 4 in. of wall depth, meeting ADA Protrusion Requirements *(Americans with Disabilities Act).*

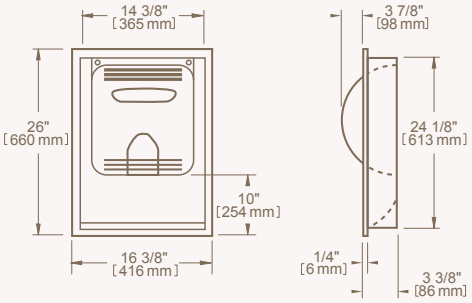

HEPA FILTRATION SYSTEM

°Stelpro offers the only certified HEPA filtration system, proven to remove 99.97% of bacteria and particles from the air.

HEPA filter kit



hepa replacement filter



pre-filter

WALL GUARD

The wall guard protects the wall under the hand dryer from drops of water due to wet hands being blown dry, keeping bacteria from forming on the wall.

white

black

stainless steel

PRODUCT	DESCRIPTION
SHDXL-40525	HEPA filter kit
SHDXL-40520	HEPA replacement filter
SHDXL-94	Replacement pre-filter with stainless steel mesh screen
SHDXL-40502	Stainless steel recess kit
SHDXL-89W	Wall guard - white (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)
SHDXL-89B	Wall guard - black (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)
SHDXL-89S	Wall guard - stainless steel (15 3/4 in. x 31 3/4 in. x 1/16 in.) (pack of 2)

HVAC PRODUCTS

SDHx SERIES
CUSTOM DUCT HEATERS

SDHR SERIES
ROUND DUCT HEATER

MUA SERIES
MAKE-UP AIR UNIT

SAB/SEB/SUB SERIES
DUCT HEATERS - HEATING BOOT™
ECOBOOT™

SB SERIES
DUAL ENERGY DUCT HEATER

SCV SERIES
VENTILATION CABINET

SFE SERIES
ELECTRIC FURNACE: MODULATING WITH ELECTRONIC CONTROLS
THE FURNACE

SFECM SERIES
ELECTRIC FURNACE: MODULATING WITH ELECTRONIC CONTROLS
THE FURNACE

FOR MORE INFORMATION REGARDING HVAC PRODUCTS, PLEASE VISIT OUR WEBSITE **STEPRO.COM/HVAC**

USEFUL INFORMATION

THE ANSWER
TO YOUR COMFORT NEEDS

CUSTOM MADE PROJECTS

For more information on the products shown here, contact your representative or visit our website: www.stelpro.com/pro

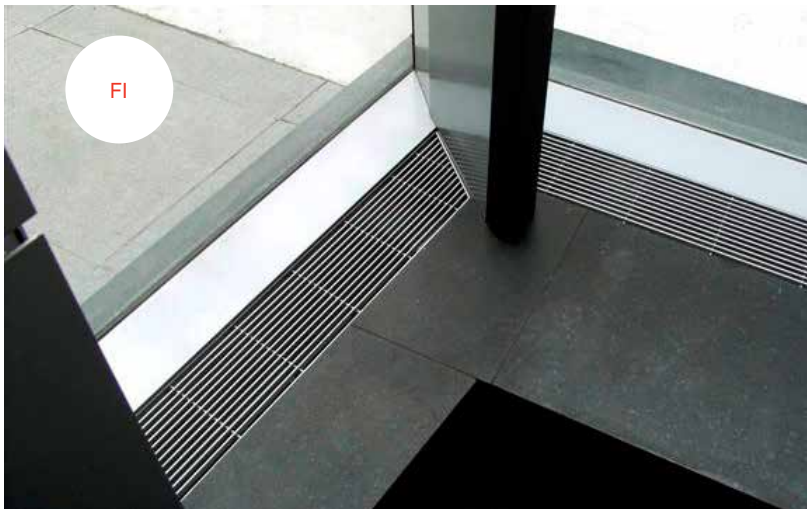

NOMENCLATURE

STANDARD MODELS

B	050	2	W

SERIES
B
ASHC
BA
ARWF
ASKS
ASK
AWF
ACF

POWER	CODE
500 W	050
750 W	075
1000 W	100
1250 W	125
1500 W	150
1750 W	175
2000 W	200
2250 W	225
2500 W	250

VOLTAGE	CODE
120 V	1
208 V	8
240 V	2
277 V	7
480 V	5

COLOR	CODE
WHITE	W
SILICA WHITE	SW
ALMOND	A
BLACK	BK
TEXTURED CHARCOAL	CHAR
CLEAR ANODIZED (PAINT)	CAP
DARK BROWN	BR

This nomenclature applies to the following series: B, ASHC, BA, ARWF*, ASKS, ASK, AWF*, ACF*
* See the exceptions in the technical specifications table of each product

COMMERCIAL/INDUSTRIAL MODELS

ADR	05	6	3	CT	W
SERIES	POWER (KW)	VOLTAGE	PHASE	CONTROL	COLOR

This nomenclature applies to the following series: ADR, ACBH, ASHU

CROSS-REFERENCE TABLES

ELECTRIC BASEBOARD HEATER 240 V / 208 V - PAGE 12

WATTS	STELPRO	BERKO / Q-MARK	ELECTROMODE	RAYWALL / MARKEL	KING	CADET
300/225	B0302	2542	BN-2203W31	H 2903	---	2F350
500/375	B0502	25426	BN-2805W31	H 2905	2K2405	2F500
750/560	B0752	2543	BN-3907W31	H 2907	3K2407	3F750
1000/750	B1002	2544	BN-4810W31	H 2910	4K2410	4F1000
1250/940	B1252	2545	BN-5712W31	H 2912	5K2412	5F1250
1500/1125	B1502	2546	BN-6615W31	H 2915	6K2415	6F1500
1750/1315	B1752	---	BN-7517W31	H 2917	7K2418	---
2000/1500	B2002	2548	BN-8420W31	H 2920	8K2420	8F2000
2250/1690	B2252	---	BN-9322W31	---	---	---
2500/1875	B2502	25408	BN-10225W31	---	10K2425	8F2025

OTHER PRODUCTS

DESCRIPTION	STELPRO	BERKO	Q-MARK	ELECTRO-MODE / DIMPLEX	RAYWALL	MARKEL	KING	CADET
COMPACT MULTIPURPOSE BASEBOARD	SBB (16)	---	---	LC	---	---	---	---
HIGH-END BASEBOARD	BA (14)	---	---	---	---	---	---	---
ELECTRONIC CONVECTOR	ASIL (24)	---	---	DEC	---	---	---	---
ELECTRONIC CONVECTOR	ASHC (18)	---	---	---	---	---	---	---
ELECTRONIC BATHROOM CONVECTOR	ASILVC (26)	---	---	---	---	---	---	---
RES WALL FAN HEATER	ARWF (28)	SRA	CRA	TWH	MWR	HF	WHF/W	CSC
WALL FAN HEATER	AWF (42)	VFK/FRA	CWH/LFK	RFI/EWA	FPQ/AFA/AFC/ AFH	3310/3320	EFW/LPW	NLW
ALUMINUM WALL FAN HEATER	AWFA (45)	FRC	AWH	---	---	3420/3450	---	---
CEILING FAN HEATER	ACF (56)	QFF	EFF	RFI/EWA	CEH	3380	LPWC	---
KICK SPACE HEATER	ASKS (30)	QTS	QTS	CKH	TSH	TSM	KT	UC
CEILING FAN HEATER	ADR (52)	FFCH	CDF	CMH	SCH	3470/3480	KDS	---
CEILING FAN HEATER	ASGH (50)	---	---	RCH	---	---	---	---
CEILING FAN HEATER	ASK (32)	---	---	---	---	---	WHFC	---
TWISTED PAIR HEATING CABLE	CT (36)	---	---	---	---	---	FC	---
HEATING CABLE MAT	SFM (38)	---	---	---	---	---	---	---
COVE HEATER	SCR (34)	RCC	RCC	---	CV	CVX	KCV	---
CABINET HEATER	ACBH (48)	CUH	CUS900	CH	T33/T46	6333/6346	KCF	COCA
MULTIPURPOSE PORTABLE HEATER	ASCH40T (58)	BRH402	BRH402	---	---	---	PGH2440	---
MULTIPURPOSE PORTABLE HEATER	ASCH48T (58)	BRH482	BRH482	DCH4831L	HF685T	HF685T	PGH2448	RCP
MULTIPURPOSE PORTABLE HEATER	ASCH4800T (58)	---	---	EMC4240	---	---	---	---
MULTIPURPOSE PORTABLE HEATER WITH BRACKET	ASCH48TWB (58)	---	---	DGWH	---	---	---	---
COMMERCIAL & RESIDENTIAL UNIT HEATER	ARUH (60)	HUH524TA	MWUH5004	CUH05B31T	HF5605T	HF5605T	EKB	CEH
COMMERCIAL & INDUSTRIAL UNIT HEATER	ASHU (62)	HUH/HUHAA	IUH/MUH	EU	HF/P3PUH	5150/HIHUH	KB	---
ALUMINUM ARCHITECTURAL BASEBOARDS	ALUX (68)	---	---	---	---	---	---	---
ALUMINUM DRAFT BARRIER	DBI (78)	---	---	---	---	---	---	---

CERTIFICATIONS

°STELPRO products are manufactured to meet all safety and performance standards required for UL certification for sale and installation in the United States.

All products in this catalog are approved by either CSA, UL or ETL certified laboratories, which certify products to applicable safety or performance standards.

Moreover, our products are manufactured to meet at least one of the two required standards for North America: UL for the United States and CSA for Canada. As a result, products are labelled cCSAus, cULus or cETLus for both Canada and USA.

SAFETY STANDARDS

CERTIFICATIONS

WARRANTY POLICY

°STELPRO WARRANTS ITS PRODUCTS AGAINST DEFECTS IN MATERIAL & WORKMANSHIP FOR A MINIMUM PERIOD OF ONE YEAR FOLLOWING THE DATE OF PURCHASE.

This warranty does not apply to damages resulting from misuse, abuse, improper installation, field alteration, or accidents of any kind. °STELPRO will not guarantee nor be held responsible, for damages resulting from products that have been modified. °STELPRO's responsibility is limited to the repair and/or replacement of parts deemed to be defective. Additional installation and/or transportation costs are not covered under the terms of this warranty. For individual extended warranties, please refer to the catalog.

MERCHANDISE RETURNS

Authorization requests for merchandise returns must be done through our Customer Service Department at the following email address: rma@stelpro.com. The purchase order number and the reason of return must be included in the email. A return authorization number (RMA) will be sent to you. The authorization number must be inscribed and clearly visible on all packages of returned merchandise. Merchandise must be packaged properly so as to arrive to us in excellent condition. The sender is responsible for all shipping costs.

Charges apply on all returns. A product cannot be returned if it meets one or more of the following criteria: special color, custom product, assembly with low-demand options, etc.

CONTACT US

°STELPRO

1041 PARENT STREET
SAINT-BRUNO-DE-MONTARVILLE
QUEBEC J3V 6L7
CANADA
contact@stelpro.com

CUSTOMER SERVICE

MASTER ELECTRICIANS OR ELECTRICAL DISTRIBUTORS
Phone: 1-450-441-2629
Toll free: 1-800-343-1022
Fax: 1-450-441-9050

TECHNICAL SUPPORT
Phone: 1-450-441-6265
Toll free: 1-866-628-5776

HVAC DIVISION
Email: proj_hvac@stelpro.com
Toll-free: 1-844-441-HVAC (4822)

MARKETING DIRECTOR OF US OPERATIONS - SALES & MARKETING

KEITH A. BRAUSS
k.brauss@stelpro.com
Mobile: 1-910-987-3382

REPRESENTATIVES

Visit our website to find a °STELPRO representative in your area: www.stelpro.com/pro/contact

360 COMFORT

°STELPRO offers a unique portfolio of the most innovative products, designed and manufactured in Canada to meet the highest of standards.From heating and ventilation to electronic controls, °STELPRO is your global comfort solution to enhance your clients' living environment. Peak performance is complemented by optimal efficiency and striking designs, uniting all aspects of comfort.

STELPRO
360 comfort

1-450-441-2629
1-450-441-9050
TOLL FREE 1-800-343-1022

STELPRO.COM

1041 PARENT ST. | SAINT-BRUNO-DE-MONTARVILLE QC | J3V 6L7 | CANADA

CANADA'S BEST MANAGED COMPANIES

STELPRO ISO 9001:2015

RECYCLÉ FSC POSITION

CAT2016-2017_USA